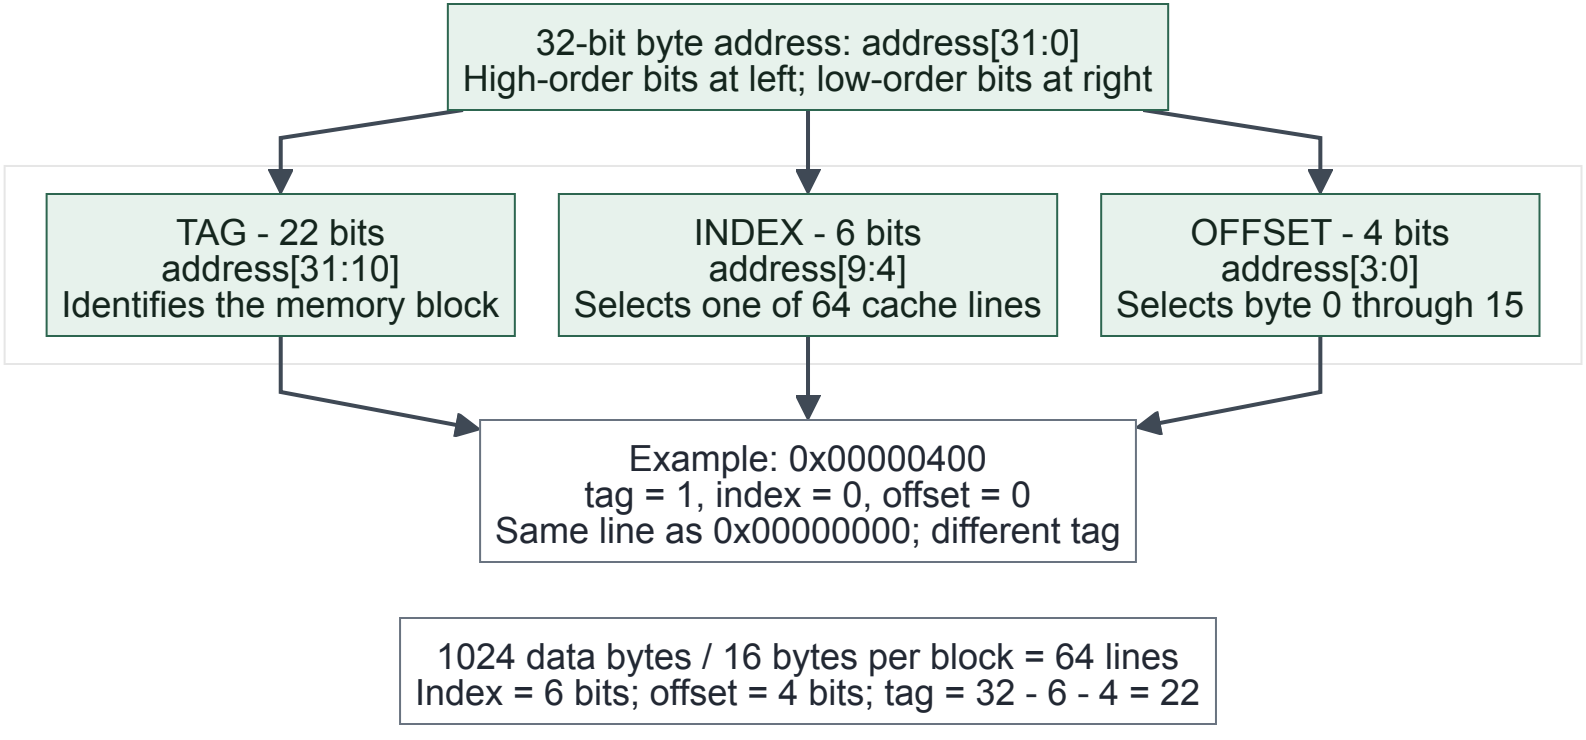
32-bit byte address: address[31:0]
High-order bits at left; low-order bits at right
TAG - 22 bits
address[31:10]
Identifies the memory block
INDEX - 6 bits
address[9:4]
Selects one of 64 cache lines
OFFSET - 4 bits
address[3:0]
Selects byte 0 through 15
Example: 0x00000400
tag = 1, index = 0, offset = 0
Same line as 0x00000000; different tag
1024 data bytes / 16 bytes per block = 64 lines
Index = 6 bits; offset = 4 bits; tag = 32 - 6 - 4 = 22