

PROMAG PCR300 Instruction Sheet


TM951018-02

POWER REQUIREMENT


1. PCR300U-XX : DC +5V 0.2A (from PC USB bus)
2. PCR300R-XX : DC +5V 0.2A regulated

CABLE CONNECTOR PIN ASSIGNMENT



1. PCR300U-XX(USB Cable)

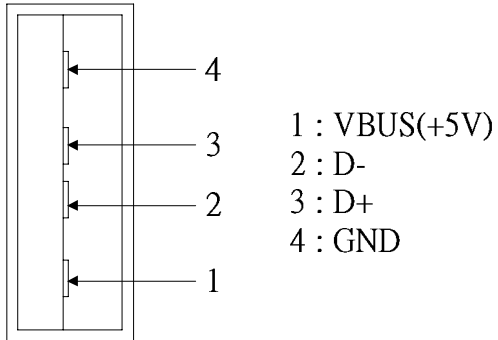


2. PCR300R-XX(RS-232 DB9 Cable)

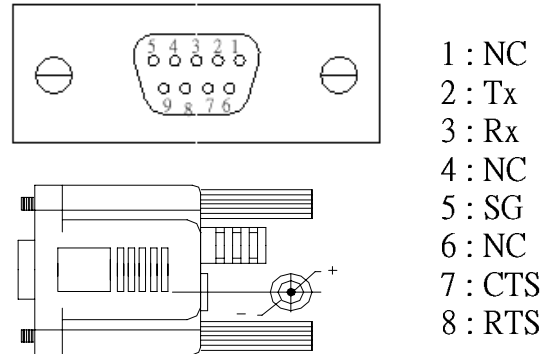

WAS-1536 APPLICATION

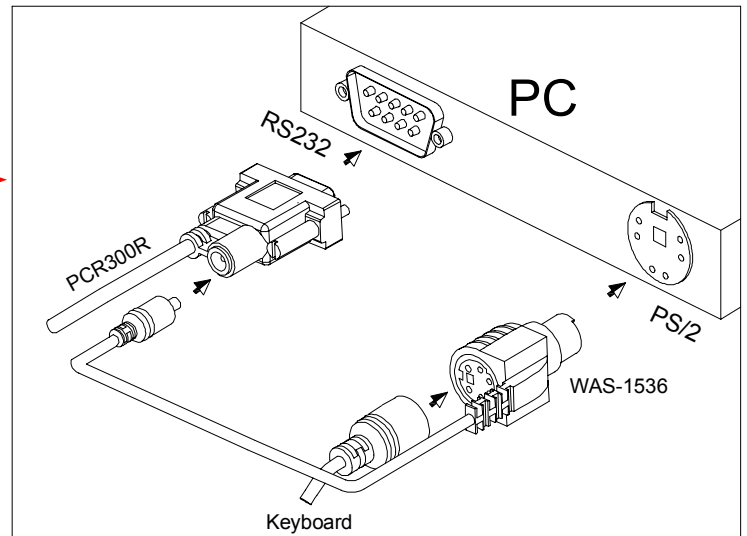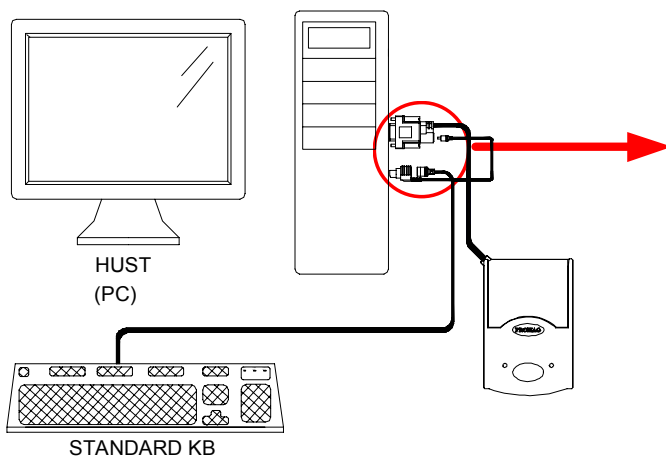


SPECIFICATIONS




1. USB Interface(PCR300U-XX):

Full compliance with the USB Specification V 1.1



2. RS232 Interface(PCR300R-XX) :

RS232 , 8N1 , 9600 bps, ± 10 KV ESD



3. Dimensions :

D 100 x W 65 x H 22.5 mm