

Journal of the Chinese Institute of Engineers

Publication details, including instructions for authors and subscription information:

<http://www.tandfonline.com/loi/tcie20>

H_∞ Filtering for time-delay systems with Markovian jumping parameters: Delay partitioning approach

Jinliang Liu^a, Wenguang Yu^b, Zhou Gu^c & Songlin Hu^d

^a College of Information Science and Technology, Donghua University, Shanghai, 201620, P. R. China Phone: +86-25-85481180 Fax: +86-25-85481180 E-mail:

^b School of Statistics and Mathematics, Shandong Economic University, Jinan, 250014, P. R. China

^c Department of Power Engineering, Nanjing Normal University, Nanjing, Jiangsu, 210042, P. R. China

^d Department of Control Science and Engineering, Huazhong University of Science and Technology, Wuhan, 430074, P. R. China

Published online: 04 Mar 2011.

To cite this article: Jinliang Liu, Wenguang Yu, Zhou Gu & Songlin Hu (2010) H_∞ Filtering for time-delay systems with Markovian jumping parameters: Delay partitioning approach, Journal of the Chinese Institute of Engineers, 33:3, 357-365, DOI: [10.1080/02533839.2010.9671624](https://doi.org/10.1080/02533839.2010.9671624)

To link to this article: <http://dx.doi.org/10.1080/02533839.2010.9671624>

PLEASE SCROLL DOWN FOR ARTICLE

Taylor & Francis makes every effort to ensure the accuracy of all the information (the "Content") contained in the publications on our platform. However, Taylor & Francis, our agents, and our licensors make no representations or warranties whatsoever as to the accuracy, completeness, or suitability for any purpose of the Content. Any opinions and views expressed in this publication are the opinions and views of the authors, and are not the views of or endorsed by Taylor & Francis. The accuracy of the Content should not be relied upon and should be independently verified with primary sources of information. Taylor and Francis shall not be liable for any losses, actions, claims, proceedings, demands, costs, expenses, damages, and other liabilities whatsoever or howsoever caused arising directly or indirectly in connection with, in relation to or arising out of the use of the Content.

This article may be used for research, teaching, and private study purposes. Any substantial or systematic reproduction, redistribution, reselling, loan, sub-licensing, systematic supply, or distribution in any form to anyone is expressly forbidden. Terms & Conditions of access and use can be found at <http://www.tandfonline.com/page/terms-and-conditions>

H_∞ FILTERING FOR TIME-DELAY SYSTEMS WITH MARKOVIAN JUMPING PARAMETERS: DELAY PARTITIONING APPROACH

Jinliang Liu*, Wenguang Yu, Zhou Gu, and Songlin Hu

ABSTRACT

This paper proposes an H_∞ filter design for Markovian jump systems with time delay. First, exploiting the delay partitioning-based Lyapunov function, new criteria are derived for the H_∞ performance analysis of the filtering-error systems, which can lead to much less conservative analysis results. Second, based on the obtained conditions, the filter gain can be obtained in terms of linear matrix inequalities (LMIs). Finally, numerical examples are given to demonstrate the effectiveness and the merit of the proposed method.

Key Words: Time delay, H_∞ filter, Markovian jump systems.

I. INTRODUCTION

The filtering problem has long been one of the fundamental problems in signal processing, communication and control applications. The problem of filtering can be briefly described as the design of an estimator from the measured output to estimate the state of the given systems. During the last few decades, the H_∞ filtering technique introduced in (Elsayed *et al.*, 1989) has received increasing attention, for example (Gao *et al.*, 2006; Peng *et al.*, 2008; Zhang *et al.*, 2005; Zhang *et al.*, 2008) and the references therein. One of its main advantages is that it is insensitive to the exact knowledge of the statistics of the noise signals.

During the past few decades, Markovian Jump Systems (MJSs) have attracted much attention (Yue *et al.*, 2005; Zhang *et al.*, 2009; Shao *et al.*, 2008; Xu *et al.*, 2003). These can be regarded as a special class of hybrid systems with finite operation modes whose

structures are subject to random abrupt changes. The system parameters usually jump among finite modes, and the mode switching is governed by a Markov process. MJSs have many applications, such as failure prone manufacturing systems, power systems and economics, etc. A great number of results on estimation and control problems related to such systems have been reported in the literature (Zhang *et al.*, 2009; Wang *et al.*, 2006; Wang *et al.*, 2004; Xiong *et al.*, 2009).

Recently, the problem of H_∞ filtering of linear / nonlinear time-delay systems has also received much attention due to the fact that for many practical filtering applications, time-delays cannot be neglected in the procedure of filter design and their existence usually results in poor performance (Wang *et al.*, 2003; Nguang *et al.*, 2007; Wang *et al.*, 2004). Some useful results on H_∞ filtering for time-delay systems have been reported in the literature and there are two kinds of results, namely delay-independent filtering (Souza *et al.*, 2001) and delay-dependent (Peng *et al.*, 2009; Wang *et al.*, 2006; Basin *et al.*, 2007; Yue *et al.*, 2006). The delay-dependent results are usually less conservative, especially when the time-delay is small. The main objective of the delay-dependent H_∞ filtering is to obtain a filter such that the filtering error system allows a maximum delay bound for a fixed H_∞ performance or achieves a minimum H_∞ performance for a given delay bound.

This paper has addressed the problem of H_∞ filter design for MJSs with time delay. To obtain less conservative results, a new Lyapunov function is

*Corresponding author. (Tel: +86-25-85481180; Fax: +86-25-85481197; Email: lj19@163.com, liujinliang@vip.163.com)

J. Liu is with the College of Information Science and Technology, Donghua University, Shanghai, 201620, P. R. China.

W. Yu is with the School of Statistics and Mathematics, Shandong Economic University, Jinan, 250014, P. R. China

Z. Gu is with the Department of Power Engineering, Nanjing Normal University, Nanjing, Jiangsu, 210042, P. R. China.

S. Hu is with the Department of Control Science and Engineering, Huazhong University of Science and Technology, Wuhan, 430074, P. R. China.

constructed, which includes delay partitioning. Based on this, an LMI-based sufficient condition for the existence of the desired H_∞ filter has been derived, which can lead to much less conservative analysis results. Compared with the existing method (Hu *et al.*, 2007; Xu *et al.*, 2005; Lin *et al.*, 2006; Li *et al.*, 2007), the conservativeness of the derived H_∞ performance analysis results is further reduced, and novel H_∞ filter design criteria are obtained. Examples used in (Hu *et al.*, 2007; Xi *et al.*, 1997) are employed to show the effectiveness and reduced conservativeness of the proposed methods.

II. SYSTEMS DESCRIPTION AND PRELIMINARIES

Fix a probability space (Ω, F, P) and consider the following class of uncertain linear stochastic systems with markovian jump parameters and time delays (Σ)

$$\begin{cases} \dot{\mathbf{x}}(t) = \mathbf{A}(\theta_t)\mathbf{x}(t) + \mathbf{A}_d(\theta_t)\mathbf{x}(t - \tau) + \mathbf{A}_\omega(\theta_t)\omega(t) \\ \mathbf{y}(t) = \mathbf{C}(\theta_t)\mathbf{x}(t) + \mathbf{C}_d(\theta_t)\mathbf{x}(t - \tau) + \mathbf{C}_\omega(\theta_t)\omega(t) \\ \mathbf{z}(t) = \mathbf{L}(\theta_t)\mathbf{x}(t) + \mathbf{L}_d(\theta_t)\mathbf{x}(t - \tau) + \mathbf{L}_\omega(\theta_t)\omega(t) \\ \mathbf{x}(t) = \phi(t), \quad \forall t \in [-\tau, 0] \end{cases}, \quad (1)$$

where $\mathbf{x}(t) \in \mathbb{R}^n$ is the state vector, $\mathbf{y}(t) \in \mathbb{R}^r$ is the measurement vector, $\omega(t) \in L_2[0, \infty)$ is the exogenous disturbance signal, $\mathbf{z}(t) \in \mathbb{R}^p$ is the signal to be estimated, τ is the constant delay time of the state in the system, $\{\theta_t\}$ is a continuous-time Markovian process with right continuous trajectories and taking values in a finite set $S = \{1, 2, \dots, N\}$ with stationary transition probabilities:

$$\text{Prob}\{\theta_{t+h} = j | \theta_t = i\} = \begin{cases} \pi_{ij}h + o(h), & i \neq j \\ 1 + \pi_{ii}h + o(h), & i = j \end{cases} \quad (2)$$

where $h > 0$, $\lim_{h \rightarrow 0} \frac{o(h)}{h} = 0$, and $\pi_{ij} \geq 0$, for $j \neq i$ is the transition rate from mode i at time t to mode j at time $t + h$ and

$$\pi_{ii} = -\sum_{j=1, j \neq i}^N \pi_{ij}. \quad (3)$$

In this paper, we consider the following filter for system Eq. (1)

$$\begin{cases} \dot{\hat{\mathbf{x}}}(t) = \mathbf{A}(\theta_t)\hat{\mathbf{x}}(t) + \mathbf{A}_d(\theta_t)\hat{\mathbf{x}}(t - \tau) + \mathbf{G}(\theta_t)(\hat{\mathbf{y}}(t) - \mathbf{y}(t)) \\ \hat{\mathbf{y}}(t) = \mathbf{C}(\theta_t)\hat{\mathbf{x}}(t) + \mathbf{C}_d(\theta_t)\hat{\mathbf{x}}(t - \tau) \\ \hat{\mathbf{z}}(t) = \mathbf{L}(\theta_t)\hat{\mathbf{x}}(t) + \mathbf{L}_d(\theta_t)\hat{\mathbf{x}}(t - \tau) \end{cases} \quad (4)$$

The set S comprises the various operation modes

of system Eq. (1) and for each possible value of $\theta_t = i$, $i \in S$, the matrices associated with “ i – th mode” will be denoted by

$$\begin{aligned} \mathbf{A}_i &:= \mathbf{A}(\theta_t = i), \mathbf{A}_{di} := \mathbf{A}_d(\theta_t = i), \mathbf{A}_{\omega i} := \mathbf{A}_\omega(\theta_t = i), \\ \mathbf{C}_i &:= \mathbf{C}(\theta_t = i), \mathbf{C}_{di} := \mathbf{C}_d(\theta_t = i), \mathbf{C}_{\omega i} := \mathbf{C}_\omega(\theta_t = i), \\ \mathbf{L}_i &:= \mathbf{L}(\theta_t = i), \mathbf{L}_{di} := \mathbf{L}_d(\theta_t = i), \mathbf{L}_{\omega i} := \mathbf{L}_\omega(\theta_t = i), \end{aligned}$$

where $\mathbf{A}_i, \mathbf{A}_{di}, \mathbf{A}_{\omega i}, \mathbf{C}_i, \mathbf{C}_{di}, \mathbf{C}_{\omega i}, \mathbf{L}_i, \mathbf{L}_{di}, \mathbf{L}_{\omega i}$ are constant matrices for any $i \in S$. It is assumed that the jumping process $\{\theta_t\}$ is accessible, i.e. the operation mode of system (Σ) is known for every $t \geq 0$.

Let $\mathbf{e}(t) = \hat{\mathbf{x}}(t) - \mathbf{x}(t)$ and $\tilde{\mathbf{z}}(t) = \hat{\mathbf{z}}(t) - \mathbf{z}(t)$. Then we have the following filtering error system:

$$\begin{cases} \dot{\mathbf{e}}(t) = \bar{\mathbf{A}}_i\mathbf{e}(t) + \bar{\mathbf{A}}_{di}\mathbf{e}(t - \tau) + \bar{\mathbf{A}}_{\omega i}\omega(t) \\ \tilde{\mathbf{z}}(t) = \bar{\mathbf{L}}_i\mathbf{e}(t) + \bar{\mathbf{L}}_{di}\mathbf{e}(t - \tau) - \bar{\mathbf{L}}_{\omega i}\omega(t) \end{cases}, \quad (5)$$

where

$$\begin{aligned} \bar{\mathbf{A}}_i &= \mathbf{A}_i + \mathbf{G}_i\mathbf{C}_i, \quad \bar{\mathbf{A}}_{di} = \mathbf{A}_{di} + \mathbf{G}_i\mathbf{C}_{di}, \\ \bar{\mathbf{A}}_{\omega i} &= -\mathbf{A}_{\omega i} - \mathbf{G}_i\mathbf{C}_{\omega i}. \end{aligned}$$

The following lemma and definitions are needed in the proof of our main results.

Lemma 1. (Gu *et al.*, 2003) For any constant matrix $\mathbf{Q} \in \mathbb{R}^{n \times n}$, $\mathbf{Q} > 0$, scalar τ , and vector function $\dot{\mathbf{x}}: [-\tau, 0] \rightarrow \mathbb{R}^n$ such that the following integration is well defined, then it holds that

$$\begin{aligned} & -\tau \int_{t-\tau}^t \dot{\mathbf{x}}^T(t) \mathbf{Q} \dot{\mathbf{x}}(t) dt \\ & \leq \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}(t - \tau) \end{bmatrix}^T \begin{bmatrix} -\mathbf{Q} & * \\ \mathbf{Q} & -\mathbf{Q} \end{bmatrix} \begin{bmatrix} \mathbf{x}(t) \\ \mathbf{x}(t - \tau) \end{bmatrix} \end{aligned} \quad (6)$$

Definition 1. The system Eq. (5) is said to be exponentially stable in the mean-square sense (EMSS), if there exist constants $\alpha > 0$, $\lambda > 0$, such that $t > 0$

$$E\{\|\mathbf{e}(t)\|^2\} \leq \alpha e^{-\lambda t} \sup_{-\tau \leq s < 0} \{\|\phi(s)\|^2\} \quad (7)$$

Definition 2. For a given function $\mathbf{V}: \mathbf{C}_{F_0}^b([-\tau, 0], \mathbb{R}^n) \times S \rightarrow \mathbb{R}$, its infinitesimal operator L (Mao *et al.*, 2002) is defined as

$$\mathcal{L} \mathbf{V}(\mathbf{x}_t) = \lim_{\Delta \rightarrow 0^+} \frac{1}{\Delta} [E(\mathbf{V}(\mathbf{x}_{t+\Delta}) | \mathbf{x}_t) - \mathbf{V}(\mathbf{x}_t)] \quad (8)$$

The H_∞ filtering problem addressed in this paper is to design a filter of form Eq. (5) such that

- The filtering error system Eq. (5) with $\omega(t) = 0$ is exponentially stable

- The H_∞ performance $\|\tilde{z}(t)\|_2 < \gamma \|\omega(t)\|_2$ is guaranteed for all nonzero $\omega(t) \in L_2[0, \infty)$ and a prescribed $\gamma > 0$ under the condition $e(t) = 0, \forall t \in [-\tau, 0]$.

$$\sum_{j=1}^N \pi_{ij} \mathbf{R}_j \leq \mathbf{R}, \quad (10)$$

where

$$\mathbf{R} = \begin{bmatrix} \mathbf{R}_{11} & \mathbf{R}_{12} & \cdots & \mathbf{R}_{1n} \\ \mathbf{R}_{21} & \mathbf{R}_{22} & \cdots & \mathbf{R}_{2n} \\ \cdots & \cdots & \ddots & \cdots \\ \mathbf{R}_{n1} & \mathbf{R}_{n2} & \cdots & \mathbf{R}_{nn} \end{bmatrix},$$

$$\mathbf{R}_i = \begin{bmatrix} \mathbf{R}_{i11} & \mathbf{R}_{i12} & \cdots & \mathbf{R}_{i1n} \\ \mathbf{R}_{i21} & \mathbf{R}_{i22} & \cdots & \mathbf{R}_{i2n} \\ \cdots & \cdots & \ddots & \cdots \\ \mathbf{R}_{in1} & \mathbf{R}_{in2} & \cdots & \mathbf{R}_{inn} \end{bmatrix},$$

III. STOCHASTIC STABILITY ANALYSIS

Theorem 1. For some given constants τ, d and γ , the system Eq. (5) is exponentially mean-square stable (EMSS) with a prescribed H_∞ performance γ , if there exist $\mathbf{P}_i > 0, \mathbf{Q}_1 > 0, \mathbf{Q}_2 > 0, \mathbf{R}_i > 0$ and $\mathbf{R} > 0$ ($i \in S$) with appropriate dimensions such that the following matrix inequalities hold.

$$\Psi = \begin{bmatrix} \Psi_{11} & * & * \\ \Psi_{21} & \Psi_{22} & * \\ \Psi_{31} & \Psi_{32} & -\mathbf{Q} \end{bmatrix} < 0, \quad (9)$$

$$\Psi_{11} = \begin{bmatrix} \Lambda_1 & * & * & \cdots & * & * \\ \Lambda_2 & \Lambda_3 & * & \cdots & * & * \\ \mathbf{R}_{i31} + \frac{\tau}{d} \mathbf{R}_{31} & \Lambda_4 & \Lambda_5 & \cdots & * & * \\ \vdots & \vdots & \vdots & \ddots & * & * \\ \mathbf{R}_{id1} + \frac{\tau}{d} \mathbf{R}_{d1} & \Lambda_6 & \Lambda_7 & \cdots & \Lambda_8 & * \\ \bar{\mathbf{A}}_{di}^T \mathbf{P}_i + \mathbf{Q}_2 & -\mathbf{R}_{id1} & -\mathbf{R}_{id2} & \cdots & -\mathbf{R}_{id(d-1)} & -\mathbf{R}_{idd} - \mathbf{Q}_2 \end{bmatrix},$$

$$\Psi_{21} = \begin{bmatrix} \bar{\mathbf{A}}_{wi}^T \mathbf{P}_i & 0 & 0 & \cdots & 0 & 0 \\ \mathbf{L}_i & 0 & 0 & \cdots & 0 & \mathbf{L}_{di} \end{bmatrix},$$

$$\Psi_{22} = \begin{bmatrix} -\gamma^2 \mathbf{I} & * \\ -\mathbf{L}_{wi} & \mathbf{I} \end{bmatrix},$$

$$\Psi_{31} = [\mathbf{Q} \bar{\mathbf{A}}_i \quad 0 \quad 0 \quad \cdots \quad 0 \quad \mathbf{Q} \bar{\mathbf{A}}_{di}],$$

$$\Psi_{32} = [\mathbf{Q} \bar{\mathbf{A}}_{wi} \quad 0],$$

$$\Lambda_1 = \mathbf{P}_i \bar{\mathbf{A}}_i + \bar{\mathbf{A}}_i^T \mathbf{P}_i + \sum_{j=1}^N \pi_{ij} \mathbf{P}_j + \mathbf{R}_{i11} - d * \mathbf{Q}_1 - \mathbf{Q}_2 + \frac{\tau}{d} \mathbf{R}_{11},$$

$$\Lambda_2 = \mathbf{R}_{i21} + d * \mathbf{Q}_1 + \frac{\tau}{d} \mathbf{R}_{21},$$

$$\Lambda_3 = \mathbf{R}_{i22} - \mathbf{R}_{i11} - d * \mathbf{Q}_1 + \frac{\tau}{d} \mathbf{R}_{22},$$

$$\Lambda_4 = \mathbf{R}_{i32} - \mathbf{R}_{i21} + \frac{\tau}{d} \mathbf{R}_{32},$$

$$\Lambda_5 = \mathbf{R}_{i33} - \mathbf{R}_{i22} + \frac{\tau}{d} \mathbf{R}_{33},$$

$$\Lambda_6 = \mathbf{R}_{id2} + \frac{\tau}{d} \mathbf{R}_{d2} - \mathbf{R}_{i(d-1)1},$$

$$\Lambda_7 = \mathbf{R}_{id3} + \frac{\tau}{d} \mathbf{R}_{d3} - \mathbf{R}_{i(d-1)2},$$

$$\Lambda_8 = \mathbf{R}_{idd} - \mathbf{R}_{i(d-1)(d-1)} + \frac{\tau}{d} \mathbf{R}_{dd},$$

$$\mathbf{Q} = \frac{\tau^2}{d} \mathbf{Q}_1 + \tau^2 \mathbf{Q}_2.$$

Proof. Introduce a new vector

$$\zeta^T(t) = [e^T(t) \quad e^T(t - \frac{\tau}{d}) \quad e^T(t - \frac{2\tau}{d}) \quad \cdots \quad e^T(t - \frac{(d-1)\tau}{d})],$$

Let $\mathbf{x}_t(s) = \mathbf{x}(t + s), -\tau \leq s \leq 0$. Then, similar to (Boukas, *et al.*, 2001), $\{(\mathbf{x}_t, \theta_t), t \geq 0\}$ is a Markov process. Construct a Lyapunov functional candidate as

$$V(\mathbf{x}_t, \theta_t) = \sum_{i=1}^4 V_i(\mathbf{x}_t, \theta_t), \quad (11)$$

where

$$V_1(\mathbf{x}_t, \theta_t) = e^T(t) \mathbf{P}(\theta_t) e(t),$$

$$V_2(\mathbf{x}_t, \theta_t) = \int_{t-\frac{\tau}{d}}^t \zeta^T(s) \mathbf{R}(\theta_t) \zeta(s) ds,$$

$$V_3(x_t, \theta_t) = \tau \int_{-\frac{\tau}{d}}^0 \int_{t+s}^t \dot{e}^T(v) Q_1 \dot{e}(v) dv ds \\ + \tau \int_{-\tau}^0 \int_{t+s}^t \dot{e}^T(v) Q_2 \dot{e}(v) dv ds,$$

$$V_4(x_t, \theta_t) = \int_{-\frac{\tau}{d}}^0 \int_{t+s}^t \zeta^T(v) R \zeta(v) dv ds.$$

Let L be the weak infinite generator of the random process $\{x_t, \theta_t\}$. Then, for each $\theta_t = i, i \in S$, we have

$$\begin{aligned} \mathcal{L}[V(x_t, \theta_t)] \\ \leq e^T(t)(2P_i \bar{A}_i + \sum_{j=1}^N \pi_{ij} P_j) e(t) \\ + 2e^T(t) P_i \bar{A}_{di} e(t - \tau) + 2e^T(t) P_i \bar{A}_{oi} \omega(t) \\ + \zeta^T(t) R_i \zeta(t) - \zeta^T(t - \frac{\tau}{d}) R_i \zeta(t - \frac{\tau}{d}) \\ + \int_{t-\frac{\tau}{d}}^t \zeta^T(s) (\sum_{j=1}^N \pi_{ij} R_j) \zeta(s) ds \\ + \dot{e}^T(t) (\frac{\tau^2}{d} Q_1 + \tau^2 Q_2) \dot{e}(t) \\ - \tau \int_{t-\frac{\tau}{d}}^t \dot{e}^T(s) Q_1 \dot{e}(s) ds - \tau \int_{t-\tau}^t \dot{e}^T(s) Q_2 \dot{e}(s) ds \\ + \frac{\tau}{d} \zeta^T(t) R \zeta(t) - \int_{t-\frac{\tau}{d}}^t \zeta^T(s) R \zeta(s) ds. \end{aligned} \quad (12)$$

Applying Lemma 1, we have

$$\begin{aligned} -\tau \int_{t-\frac{\tau}{d}}^t \dot{e}^T(s) Q_1 \dot{e}(s) ds \\ \leq d \begin{bmatrix} e(t) \\ e(t - \frac{\tau}{d}) \end{bmatrix}^T \begin{bmatrix} -Q_1 & * \\ Q_1 & -Q_1 \end{bmatrix} \begin{bmatrix} e(t) \\ e(t - \frac{\tau}{d}) \end{bmatrix} \end{aligned} \quad (13)$$

$$\begin{aligned} -\tau \int_{t-\tau}^t \dot{e}^T(s) Q_2 \dot{e}(s) ds \\ \leq \begin{bmatrix} e(t) \\ e(t - \tau) \end{bmatrix}^T \begin{bmatrix} -Q_2 & * \\ Q_2 & -Q_2 \end{bmatrix} \begin{bmatrix} e(t) \\ e(t - \tau) \end{bmatrix} \end{aligned} \quad (14)$$

Combining Eq. (12), Eq. (13) and Eq. (14), it is easy to see that

$$\begin{aligned} \mathcal{L}[V(x_t, \theta_t)] - \gamma^2 \omega^T(t) \omega(t) + \tilde{z}^T(t) \tilde{z}(t) \\ \leq e^T(t)(2P_i \bar{A}_i + \sum_{j=1}^N \pi_{ij} P_j) e(t) + 2e^T(t) P_i \bar{A}_{di} e(t - \tau) \\ + 2e^T(t) P_i \bar{A}_{oi} \omega(t) - \gamma^2 \omega^T(t) \omega(t) + \tilde{z}^T(t) \tilde{z}(t) \end{aligned}$$

$$\begin{aligned} + \zeta^T(t) R_i \zeta(t) - \zeta^T(t - \frac{\tau}{d}) R_i \zeta(t - \frac{\tau}{d}) \\ + \dot{e}^T(t) (\frac{\tau^2}{d} Q_1 + \tau^2 Q_2) \dot{e}(t) + \frac{\tau}{d} \zeta^T(t) R \zeta(t) \\ + d \begin{bmatrix} e(t) \\ e(t - \frac{\tau}{d}) \end{bmatrix}^T \begin{bmatrix} -Q_1 & * \\ Q_1 & -Q_1 \end{bmatrix} \begin{bmatrix} e(t) \\ e(t - \frac{\tau}{d}) \end{bmatrix} \\ + \begin{bmatrix} e(t) \\ e(t - \tau) \end{bmatrix}^T \begin{bmatrix} -Q_2 & * \\ Q_2 & -Q_2 \end{bmatrix} \begin{bmatrix} e(t) \\ e(t - \tau) \end{bmatrix}. \end{aligned} \quad (15)$$

From Eq. (15) and using Schur complement, it is easy to see that $L[V(x_t, \theta_t)] - \gamma^2 \omega^T(t) \omega(t) + \tilde{z}^T(t) \tilde{z}(t) < 0$ if Eq. (9) and Eq. (10) hold for any delay smaller than τ . Define a new function as

$$W(x_t, i, t) = e^{\epsilon t} V(x_t, i, t). \quad (16)$$

Its infinitesimal operator L is given by

$$W(x_t, i, t) = \epsilon e^{\epsilon t} V(x_t, i, t) + e^{\epsilon t} L V(x_t, i, t). \quad (17)$$

By the generalized $It\hat{o}$ formula (Gahinet *et al.*, 1995), we can obtain from Eq. (17) that

$$\begin{aligned} E\{W(x_t, i, t)\} - E\{W(x_0, i)\} \\ = \int_0^t \epsilon e^{\epsilon s} E\{V(x_s, i)\} ds + \int_0^t e^{\epsilon s} E\{L V(x_s, i)\} ds. \end{aligned} \quad (18)$$

Then, using the method similar to (Yue *et al.*, 2005), we can see that there exists a positive number α such that for $t > 0$

$$E\{V(x_t, i, t)\} \leq \alpha \sup_{-\tau \leq s \leq 0} \{\|\phi(s)\|^2\} e^{-\epsilon t} \quad (19)$$

Since $V(x_t, i, t) \geq \{\lambda_{\min}(P_i)\} x^T(t) x(t)$, it can be shown from Eq. (19) that for $t \geq 0$

$$E\{x^T(t) x(t)\} \leq \bar{\alpha} e^{-\epsilon t} \sup_{-\tau \leq s \leq 0} \{\|\phi(s)\|^2\}, \quad (20)$$

where $\bar{\alpha} = \alpha/(\lambda_{\min} P_i)$. Recalling Definition 1, the proof can be completed.

Remark 1. As mentioned above, the interval delay $[0, \tau]$ is segmented into d intervals, and from the example below, we can see that the more intervals are segmented, the less conservative the results.

Remark 2. In the proof of Theorem 1, by segmentalizing the state-delay into several continuous equivalent subintervals in constructing the Lyapunov function, a new analysis method is proposed to address the problem of stability, which leads to much less conservative results than those in the existing (Yue *et al.*, 2005; Zhang *et al.*, 2009; Hu *et al.*, 2007).

IV. H_∞ FILTER DESIGN

In the following, we are seeking to design the H_∞ filtering based on Theorem 1.

Theorem 2. For some given constants τ , d and γ , the augmented system Eq. (5) is exponentially mean-square stable (EMSS) with a prescribed H_∞ performance γ if there exist $P_i > 0$, $Q_1 > 0$, $Q_2 > 0$, $R_i > 0$, $R > 0$ and \bar{G}_i ($i \in S$) with appropriate dimensions such that the following LMIs hold for a given $\varepsilon > 0$

$$\tilde{\Psi} = \begin{bmatrix} \tilde{\Psi}_{11} & * & * \\ \tilde{\Psi}_{21} & \Psi_{22} & * \\ \tilde{\Psi}_{31} & \Psi_{32} & \Psi_{33} \end{bmatrix} < 0, \quad (21)$$

$$\sum_{j=1}^N \pi_{ij} R_j \leq R, \quad (22)$$

where

$$\tilde{\Psi}_{11} = \begin{bmatrix} \Gamma_1 & * & * & \dots & * & * \\ \Lambda_2 & \Lambda_3 & * & \dots & * & * \\ R_{i31} + \frac{\tau}{d} R_{31} & \Lambda_4 & \Lambda_5 & \dots & * & * \\ \vdots & \vdots & \vdots & \ddots & * & * \\ R_{id1} + \frac{\tau}{d} R_{d1} & \Lambda_6 & \Lambda_7 & \dots & \Lambda_8 & * \\ \Gamma_2 & -R_{id1} & -R_{id2} & \dots & -R_{id(d-1)} & -R_{idd} - Q_2 \end{bmatrix},$$

$$\tilde{\Psi}_{21} = \begin{bmatrix} -A_{wi}^T P_i - C_{wi}^T \bar{G}_i^T & 0 & 0 & \dots & 0 & 0 \\ L_i & 0 & 0 & \dots & 0 & L_{di} \end{bmatrix},$$

$$\tilde{\Psi}_{31} = [P_i A_i + \bar{G}_i C_i \quad 0 \quad 0 \quad \dots \quad 0 \quad P_i A_{di} + \bar{G}_i C_{di}],$$

$$\tilde{\Psi}_{33} = -2\varepsilon P_i + \varepsilon^2 Q,$$

$$\Gamma_1 = P_i A_i + A_i^T P_i + \bar{G}_i C_i + C_i^T \bar{G}_i^T + \sum_{j=1}^N \pi_{ij} P_j + R_{i11} - d^* Q_1 - Q_2 + \frac{\tau}{d} R_{11},$$

$$\Gamma_2 = A_{di}^T P_i + C_{di}^T \bar{G}_i^T + Q_2$$

and Q , Λ_3 , Λ_4 , Λ_5 , Λ_6 , Λ_7 , Λ_8 , Ψ_{22} , Ψ_{32} are as defined in Theorem 1.

Moreover, the filter gain in the form of Eq. (4) is as follows:

$$G_i = P_i^{-1} \bar{G}_i \quad (23)$$

Proof. Defining $\bar{G}_i = P_i G_i$, from Eq. (5), Eq. (9) and using Schur complement, the matrix inequality Eq. (9) holds if and only if

$$\begin{bmatrix} \tilde{\Psi}_{11} & * & * \\ \tilde{\Psi}_{21} & \Psi_{22} & * \\ \tilde{\Psi}_{31} & \Psi_{31} & -P_i Q^{-1} P_i \end{bmatrix} < 0. \quad (24)$$

Due to

$$(\varepsilon Q - P_i) Q^{-1} (\varepsilon Q - P_i) \geq 0 \quad (25)$$

which gives

$$-P_i Q^{-1} P_i \leq -2\varepsilon P_i + \varepsilon^2 Q, \quad i = 1, 2. \quad (26)$$

Substituting $-P_i Q^{-1} P_i$ with $-2\varepsilon P_i + \varepsilon^2 Q$ into Eq. (24), we obtain Eq. (21), so if Eq. (21) holds, we have Eq. (9) holds.

From the above proof, we have $G_i = P_i^{-1} \bar{G}_i$. This completes the proof.

Remark 3. The inequality Eq. (26) is used to bound the term $-P_i Q^{-1} P_i$ in Eq. (24). This step can be improved by adopting the cone complementary algorithm (El et al., 1997), which is popular in current control designs. But the cone complementary algorithm carries much computational burden due to its complexity. Here the scaling parameter $\varepsilon > 0$ can be used to improve conservatism in Theorem 2.

Remark 4. From Theorem 2, we can get the upper bound of time delay τ through solving the following maximum problem by using LMI SOLVER FEASP in MATLAB LMI tool box (Gahinet et al., 1995)

$$\begin{aligned} \max \quad & \tau \\ \text{subject to} \quad & \text{LMIs Eq(21), Eq(22)} \end{aligned}$$

If the system mode set $S = \{1\}$, the jump system is just a general linear system. From the proof of

Table 1 Max. value of τ

Method	Delay bound τ
(Xu <i>et al.</i> , 2005; Lin <i>et al.</i> , 2006)	4.4721
(Li <i>et al.</i> , 2007)	4.54
Corollary 1 ($d = 4$)	6.0568

Table 2 Max. value of τ for different d

d	$d = 2$	$d = 3$	$d = 4$...
τ	5.7175	5.9677	6.0568	...

Theorem 1, we can conclude the following corollary.

Corollary 1. For some given constants τ, d , the augmented systems Eq. (5) with $i \in S = \{1\}$ are exponentially mean-square stable (EMSS) if there exist $P > 0$, $Q_1 > 0$, $Q_2 > 0$ and $R > 0$ with appropriate dimensions such that the following LMIs hold for a given $\varepsilon > 0$

$$\begin{bmatrix} \Psi & * \\ \Lambda & -Q \end{bmatrix} < 0, \quad (27)$$

where

$$\Psi = \begin{bmatrix} \Psi_{11} + \Phi + \Phi^T & * & * \\ -M^T & -dQ_1 & * \\ -N^T & 0 & -Q_2 \end{bmatrix},$$

$$\Psi_{11} = \begin{bmatrix} P\bar{A}_1 + \bar{A}_1^T P + R_{11} & * & \cdots & * & * \\ R_{21} & R_{22} - R_{11} & \cdots & * & * \\ \vdots & \vdots & \ddots & * & * \\ R_{d1} & R_{d2} - R_{(d-1)1} & \cdots & R_{dd} - R_{(d-1)(d-1)} & * \\ \bar{A}_{d1}^T P & -R_{d1} & \cdots & -R_{d(d-1)} & -R_{dd} \end{bmatrix},$$

$$\Phi = [M + N \quad -M \quad \underbrace{0 \cdots 0}_{d-2} \quad -N],$$

$$M = [M_1 \quad \cdots \quad M_{d+1}], N = [N_1 \quad \cdots \quad N_{d+1}],$$

$$\Lambda = [Q\bar{A} \quad \underbrace{0 \cdots 0}_{d-1} \quad Q\bar{A}_{d1} \quad 0 \quad 0],$$

$$Q = \frac{\tau^2}{d} Q_1 + \tau^2 Q_2.$$

V. EXAMPLES

Example 1. Consider a Markovian jump system in Eq. (5) with one modes and the following parameters (Xi *et al.*, 1997):

$$\dot{x}(t) = \begin{bmatrix} -2 & 0 \\ 0 & -0.9 \end{bmatrix} x(t) + \begin{bmatrix} -1 & 0 \\ -1 & -1 \end{bmatrix} x(t - \tau).$$

For several methods (Xu *et al.*, 2005; Lin *et al.*, 2006; Li *et al.*, 2007) and different values of d , the computation results of τ are listed in Table 1, Table 2. Obviously, for the same conditions for the time delay, using delay partitioning can lead to less conservative results.

To illustrate the proposed method of filtering

design, another example is considered as follows.

Example 2. Consider linear Markovian jump systems in the form Eq. (1) with two modes. For mode 1 and 2, the dynamics of the system are described as

$$A_1 = \begin{bmatrix} -3 & 1 & 0 \\ 0.3 & -2.5 & 1 \\ -0.1 & 0.3 & -3.8 \end{bmatrix},$$

$$A_{d1} = \begin{bmatrix} -0.2 & 0.1 & 0.6 \\ 0.5 & -1 & -0.8 \\ 0 & 1 & -2.5 \end{bmatrix},$$

$$A_{\omega 1} = \begin{bmatrix} 1 \\ 0 \\ 1 \end{bmatrix},$$

$$C_1 = [0.8 \quad 0.3 \quad 0], C_{d1} = [0.2 \quad -0.3 \quad -0.6],$$

$$C_{\omega 1} = 0.2,$$

$$L_1 = [0.5 \quad -0.1 \quad 1], L_{d1} = [0 \quad 0 \quad 0], L_{\omega 1} = 0,$$

$$A_2 = \begin{bmatrix} -2.5 & 0.5 & -0.1 \\ 0.1 & -3.5 & 0.3 \\ -0.1 & 1 & -2 \end{bmatrix},$$

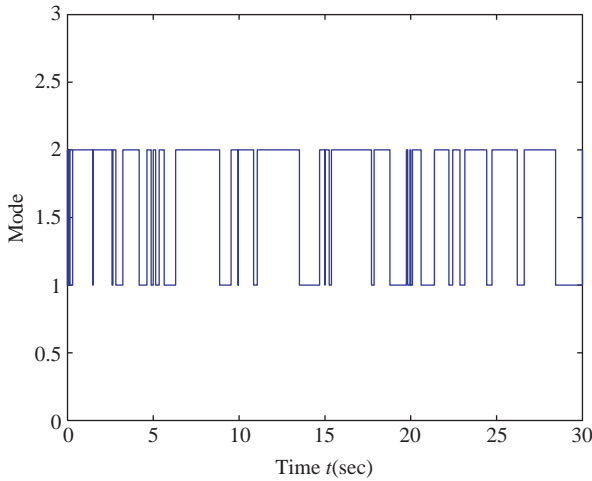


Fig. 1 Operation modes

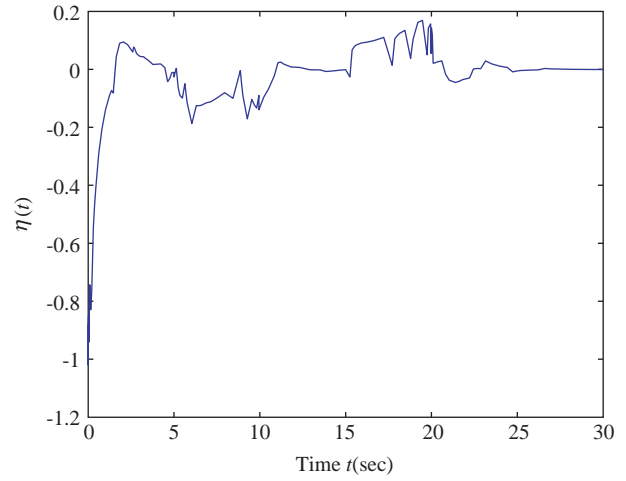


Fig. 2 Estimated signals error $\eta(t) = z(t) - \tilde{z}(t)$

$$A_{d2} = \begin{bmatrix} 0 & -0.3 & 0.6 \\ 0.1 & 0.5 & 0 \\ -0.6 & 1 & -0.8 \end{bmatrix},$$

$$A_{\omega 2} = \begin{bmatrix} -0.6 \\ 0.5 \\ 0 \end{bmatrix},$$

$$C_2 = [0.5 \quad 0.2 \quad 0.3], C_{d2} = [0 \quad -0.6 \quad 0.2],$$

$$C_{\omega 2} = 0.5$$

$$L_2 = [0 \quad 1 \quad 0.6], L_{d2} = [0 \quad 0 \quad 0], L_{\omega 2} = 0.$$

Suppose the transition probability matrix is given

by $\pi = \begin{bmatrix} -0.5 & 0.5 \\ 0.3 & -0.3 \end{bmatrix}$ and the initial conditions $x(0) =$

$[0.8 \quad 0.2 \quad -0.9]^T, \hat{x}(0) = [0 \quad 0.2 \quad 0]^T$.

This system is nominally the same one considered in (Hu *et al.*, 2007). By Theorem 2, we get the maximum time delay $\tau = 12.2864$ for $\varepsilon = 10$ and $\gamma = 1.2$. This upper bound is much larger than the one $\tau = 1.9195$ given by (Hu *et al.*, 2007), which shows our method is less conservative than that of (Hu *et al.*, 2007).

The corresponding filter are given by

$$G_1 = \begin{bmatrix} -4.9979 \\ -0.0004 \\ -4.9979 \end{bmatrix}, G_2 = \begin{bmatrix} 1.2000 \\ -0.9998 \\ -0.0000 \end{bmatrix}.$$

To illustrate the performance of the designed filter, choose the disturbance function as follows

$$\omega(t) = \begin{cases} -0.5, & 5 < t < 10 \\ 0.5, & 15 < t < 20 \\ 0, & \text{otherwise} \end{cases}.$$

With this filter, the simulation results are shown in Figs. 1-2.

VI. CONCLUSIONS

In this paper, we have studied a class of H_∞ filter design for Markovian jump systems with time delay via manipulating the delay partitioning-based Lyapunov-Krasovskii Functionals. With the proposed method, an LMI-based sufficient condition for the existence of the desired H_∞ filter has been derived, which can lead to much less conservative analysis results. Finally, Numerical examples have been carried out to demonstrate the effectiveness of the proposed method.

ACKNOWLEDGMENTS

Financial supports provided by the Chinese Ministry of Education Humanities and Social Sciences Project (No. 09YJC910004).

NOMENCLATURE

I	the identity matrix of appropriate dimension
\mathbb{R}^n	n -dimensional Euclidean space
$\mathbb{R}^{n \times m}$	the set of $n \times m$ real matrices
T	matrix transposition
$X > 0$	the matrix X is real symmetric positive definite
$X \geq 0$	the matrix X is real symmetric positive semi-definite
$\ \cdot\ $	the Euclidean vector norm
$E\{x\}$	the expectation of stochastic variable x
$\begin{bmatrix} A & * \\ B & C \end{bmatrix}$	a symmetric matrix

REFERENCES

- Basin, M., Sanchez, E., and Martinez-Zuniga, R., 2007, "Optimal Linear Filtering for Systems with Multiple State and Observation Delays," *International Journal of Innovative Computing, Information and Control*, Vol. 3, No. 5, pp. 1309-1320.
- Boukas, E. K., Liu, Z. K., and Liu, G. X., 2001, "Delay-Dependent Robust Stability and H_∞ Control of Jump Linear Systems," *International Journal of Control*, Vol. 74, No. 4, pp. 329-340.
- Elsayed, A., and Grimble, M. J., 1989, "A New Approach to the H_∞ Design of Optimal Digital Linear Filters," *IMA Journal of Mathematical Control and Information*, Vol. 6, No. 2, pp. 233-251.
- Gahinet, P., Nemirovski, A., Laub, A. J., and Chilali, M., 1995, *LMI Control Toolbox*, The MathWorks, Inc., Natick, MA, USA.
- Gao, H. J., Lam, J., and Wang, C., 2006, "Robust Energy-to-peak Filter Design for Stochastic Time-delay Systems," *Systems & Control Letters*, Vol. 55, No. 2, pp. 101-111.
- Ghaoui, L. El, Oustry, F., and AitRami, M., 1997, "A Cone Complementarity Linearization Algorithm for Staticoutput-Feedback and Related Problems," *IEEE Transactions on Automatic Control*, Vol. 2, No. 8, pp. 1171-1176.
- Gu, K., Kharitonov, V., and Chen, J., 2003, *Stability of Time-Delay Systems*, Birkhauser, USA.
- Hu, L.S., Shi, P., and Cao, Y. Y., 2007, "Delay-Dependent Filtering Design for Time-Delay Systems with Markovian Jumping Parameters," *International Journal of Adaptive Control and Signal Processing*, Vol. 21, No. 5, pp. 434-448.
- Li, T., Guo, L., and Lin, C., 2007, "A New Criterion of Delay-Dependent Stability for Uncertain Time-delay Systems," *Control Theory & Applications, IET*, Vol. 1, No. 3, pp. 611-616.
- Lin, C., Wang, Q. G., and Lee, T. H., 2006, "A Less Conservative Robust Stability Test for Linear Uncertain Time-Delay Systems," *IEEE Transactions on Automatic control*, Vol. 51, No. 1, pp. 87-91.
- Mao, X., 2002, "Exponential Stability of Stochastic Delay Interval Systems with Markovian Switching," *IEEE Transactions on Automatic Control*, Vol. 47, No. 10, pp. 1604-1612.
- Nguang, S., and Shi, P., 2007, "Delay-Dependent H_∞ Filtering for Uncertain Time Delay Nonlinear Systems: An Lmi Approach," *Control Theory & Applications, IET*, Vol. 1, No. 1, pp. 133-140.
- Peng, C., and Tian, Y. C., 2008, "Delay-Dependent Robust Stability Criteria for Uncertain Systems with Interval Time-Varying Delay," *Journal of Computational and Applied Mathematics*, Vol. 14, No. 2, pp. 480-494.
- Peng, C., Yue, D., Tian, E., and Zhang Y., 2009, "Improved Network-Based Robust H_∞ Filtering for Uncertain Linear Systems," *International Journal of Innovative Computing, Information and Control*, Vol. 5, No. 4, pp. 961-970.
- Shao, H., 2008, "Delay-Range-Dependent Robust H_∞ Filtering for Uncertain Stochastic Systems with Mode-Dependent Time Delays and Markovian Jump Parameters," *Journal of Mathematical Analysis and Applications*, Vol. 342, No. 2, pp. 1084-1095.
- Souza, C. E. de, Palhares, R. M., and Peres, P. L. D., 2001, "Robust Filter Design for Uncertain Linear Systems with Multiple Time-Varying State Delays," *IEEE Transactions on Signal Processing*, Vol. 49, No. 3, pp. 569-576.
- Wang, F., Zhang, Q., and Yao, B., 2006, "LMI-Based Reliable H_∞ Filtering with Sensor Failure," *International Journal of Innovative Computing Information and Control*, Vol. 2, No. 4, pp. 737-748.
- Wang, Z., and Ho, Daniel W. C., 2003, "Filtering on Nonlinear Time-Delay Stochastic Systems," *Automatica*, Vol. 39, No.1, pp. 101-109.
- Wang, Z., Ho, Daniel W. C., and Liu, X., 2004, "Robust Filtering Under Randomly Varying Sensor Delay with Variance Constraints," *IEEE Transactions on Circuits and Systems II: Express Briefs*, Vol. 51, No. 6, pp. 320-326.
- Wang, Z., Lam, J., and Liu, X., 2004, "Exponential Filtering for Uncertain Markovian Jump Time-Delay Systems with Nonlinear Disturbances," *IEEE Transactions on Circuits and Systems II: Express Briefs*, Vol. 51, No.5, pp. 262-268.
- Wang, Z., Liu, Y., Yu, L., and Liu, X., 2006, "Exponential Stability of Delayed Recurrent Neural Networks with Markovian Jumping Parameters," *Physics Letters A*, Vol. 356, No. 4-5, pp. 346-352.
- Xi, L., and Souza, CE De, 1997, "Criteria for Robust Stability and Stabilization of Uncertain Linear Systems with State Delay," *Automatica*, Vol. 33, No. 9, pp. 1657-1662.
- Xiong, J., and Lam, J., 2009, "Robust H_2 Control of Markovian Jump Systems with Uncertain Switching Probabilities," *International Journal of Systems Science*, Vol. 40, No. 3, pp. 255-265.
- Xu, S., Chen, T., and Lam, J., 2003, "Robust H_∞ Filtering for Uncertain Markovian Jump Systems with Mode-Dependent Time Delays," *IEEE Transactions on Automatic control*, Vol. 48, No. 5, pp. 900-907.
- Xu, S., and Lam, J., 2005, "Improved Delay-Dependent Stability Criteria for Time-Delay Systems," *IEEE Transactions on Automatic Control*, Vol. 50, No. 3, pp. 384-387.

- Zhang, X. M., Wu, M., She, J. H., and He. Y., 2005, "Delay-Dependent Stabilization of Linear Systems with Time-Varying State and Input Delays," *Automatica*, Vol. 41, No. 8, pp. 1405-1412.
 - Yue, D., and Han. Q. L., 2005, "Delay-Dependent Exponential Stability of Stochastic Systems with Time-Varying Delay, Nonlinearity, and Markovian Switching," *IEEE Transactions on Automatic Control*, Vol.50, No.2, pp.217-222.
 - Yue , D., and Han, Q. L., 2006, "Network Based Robust H_∞ Filtering for Uncertain Linear Systems," *IEEE Transactions Signal Processing*, Vol. 54, No. 11, pp. 4293-4301.
 - Zhang, H., Yan, H., Liu, J., and Chen, Q., 2009, "Robust Filters for Markovian Jump Linear Systems Under Sampled Measurements," *Journal of Mathematical Analysis and Applications*, Vol. 356, No.1, pp. 382-392.
 - Zhang, L., and Boukas, E. K., 2009, "Mode-Dependent H_∞ Filtering for Discrete-Time Markovian Jump Linear Systems with Partly Unknown Transition Probabilities," *Automatica*, Vol.45, No.6, pp. 1462-1467.
 - Zhang, X. M., and Han. Q. L., 2008, "A Less Conservative Method for Designing H_∞ Filters for Linear Time-delay Systems," *International Journal of Robust and Nonlinear Control*, Vol. 19, No. 12, pp. 1376-1396.
- Manuscript Received: Dec. 08, 2009**
Revision Received: Mar. 17, 2010
and Accepted: Mar. 22, 2010