


BNC Connectors, 50 Ohm (Continued)

Vertical Jacks PC Board/Panel Mount

Plating

Body — Nickel

Dielectric — Polymethylpentene



Maximum Panel Thickness **6.1** [0.240]

Recommended Panel Cutout

Lockwasher and Jam Nut




Part No.
1-329632-2




Part No.
1-329631-2

VALOX Body

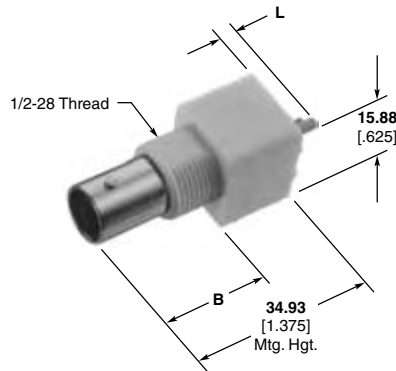


Metal Body

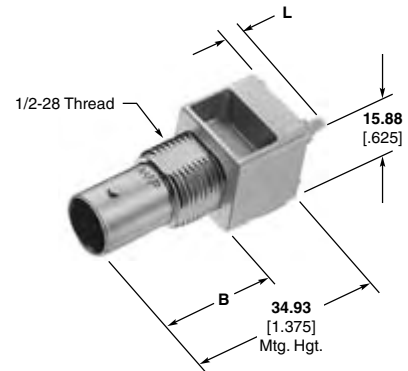


Body Material	Center Contact Plating	Dim. B	Dim. L	Part No.	
				Without Mounting Posts	With Mounting Posts
VALOX, White	Tin	21.21 .835	3.48 .137	5226993-1	5227222-1
	Gold	21.21 .835	3.48 .137	5226993-3	5227222-3
VALOX, Black	Tin	21.21 .835	3.48 .137	5226993-2	5227222-2
	Gold	21.21 .835	3.48 .137	5226993-6	5227222-6
Metal	Tin	20.83 .820	3.48 .137	—	5227671-1
	Gold	20.83 .820	3.48 .137	—	5227673-1

Note: If an Insulating Bushing is required see part number 330620 and Panel Cutout on page 54.

Without Mounting Posts

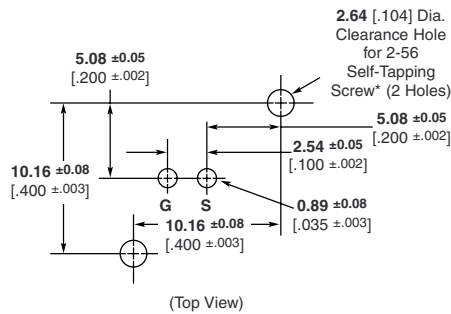

With Mounting Posts

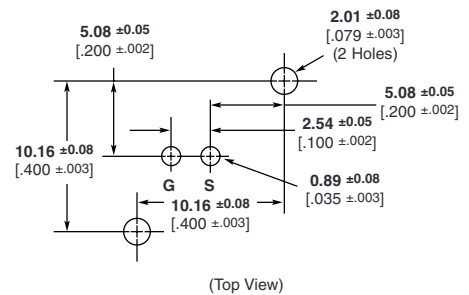

Recommended PC Board Layouts

* Screw for board thickness of **2.38** [0.093] or greater **Part No. 221108-2**.
Screw for thickness of less than **2.38** [0.093] **Part No. 221108-4**.

VALOX is a trademark of General Electric Company.

Note: Part Numbers are RoHS compliant except: ♦ Indicates non-RoHS compliant.