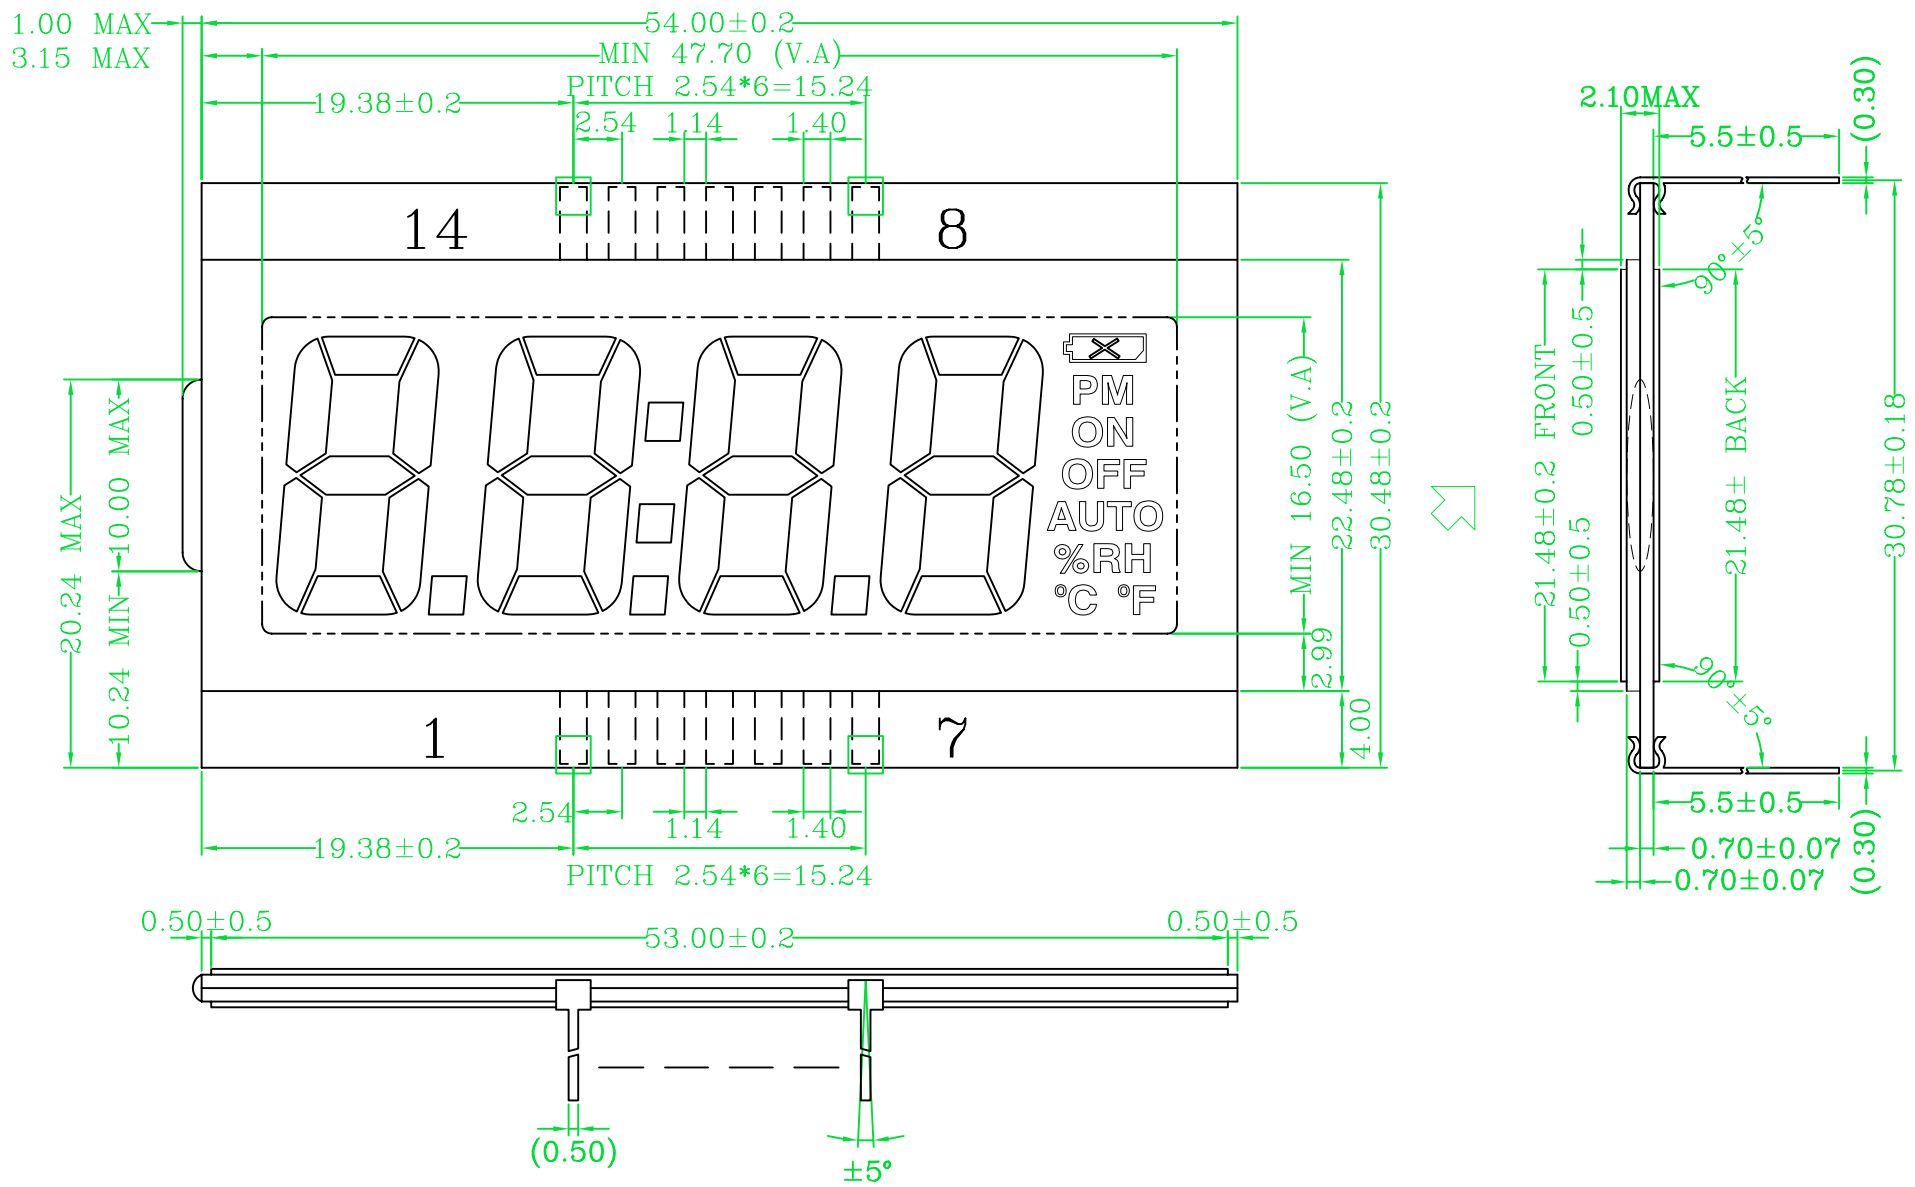

1. DISPLAY TYPE	HTN/POSITIVE	6. OPERATIVE TEMP.	-20°C TO 70°C	REVISES			TECH. CO., LTD					PROJECTION	
2. VIEWING DIRECTION	6 O'CLOCK	7. STORAGE TEMP.	-30°C TO 80°C	VER.	CONTENT	DATE							
3. DRIVE METHOD	1/4 DUTY 1/3 BIAS	8. CONNECTOR	PIN	3	依客户要求修改圖形及玻璃厚度	2011.05.16	APPROVED BY			CUSTOM NO.		UNITS	mm
4. OPERATIVE VOLTAGE	3.0 V 64HZ	REMARK: 小片在上 磨邊					CHECKED BY			MODEL NO.	LCD5430	SCALE	
5. POLARIZER MODE	TRANSFLECTIVE						DRAWING BY	LEI	2011.05.16	DESIGN NO.	S-54-3048-40-2	SHEET	1 OF 4