

Step-Down Regulator - Automotive, Low-Iq, Dual-Mode

NCV891330

3 A, 2 MHz

The NCV891330 is a Dual Mode regulator intended for Automotive, battery-connected applications that must operate with up to a 45 V input supply. Depending on the output load, it operates either as a PWM Buck Converter or as a Low Drop-Out Linear Regulator, and is suitable for systems with low noise and Low Quiescent Current requirements often encountered in automotive driver information systems. A reset pin (with fixed delay) simplifies interfacing with a microcontroller.


The NCV891330 also provides several protection features expected in automotive power supply systems such as current limit, short circuit protection, and thermal shutdown. In addition, the high switching frequency produces low output voltage ripple even when using small inductor values and an all-ceramic output filter capacitor – forming a space-efficient switching regulator solution.

Features

- 30 μ A Iq in Light Load Condition
- 3.0 A Maximum Output Current in PWM Mode
- Internal N-channel Power Switch
- VIN Operating Range 3.7 V to 36 V
- Withstands Load Dump to 45 V
- Logic Level Enable Pin can be Tied to Battery
- Fixed Output Voltage of 5.0 V, or 3.3 V
- 2 MHz Free-running Switching Frequency
- ± 2 % Output Voltage Accuracy
- NCV Prefix for Automotive Requiring Site and Control Changes
- These Devices are Pb-Free and are RoHS Compliant


Typical Applications

- Audio
- Infotainment
- Instrumentation
- Safety-Vision Systems




SOIC-8
EXPOSED PAD
CASE 751AC

MARKING DIAGRAM



| | |
|---|--|
| x | = 3 for 3.3 V Output 5 for 5.0 V Output |
| A | = Assembly Location |
| L | = Wafer Lot |
| Y | = Year |
| W | = Work Week |
| ▪ | = Pb-Free Device |

PIN CONNECTIONS

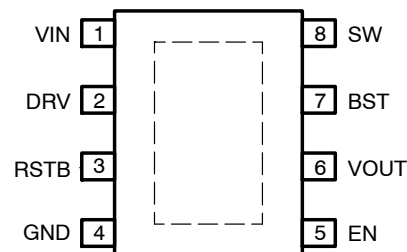

(Top View)

ORDERING INFORMATION

See detailed ordering and shipping information on page 15 of this data sheet.

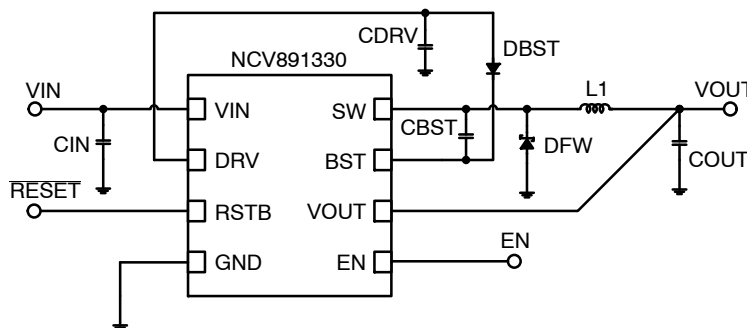


Figure 1. Typical Application

NCV891330

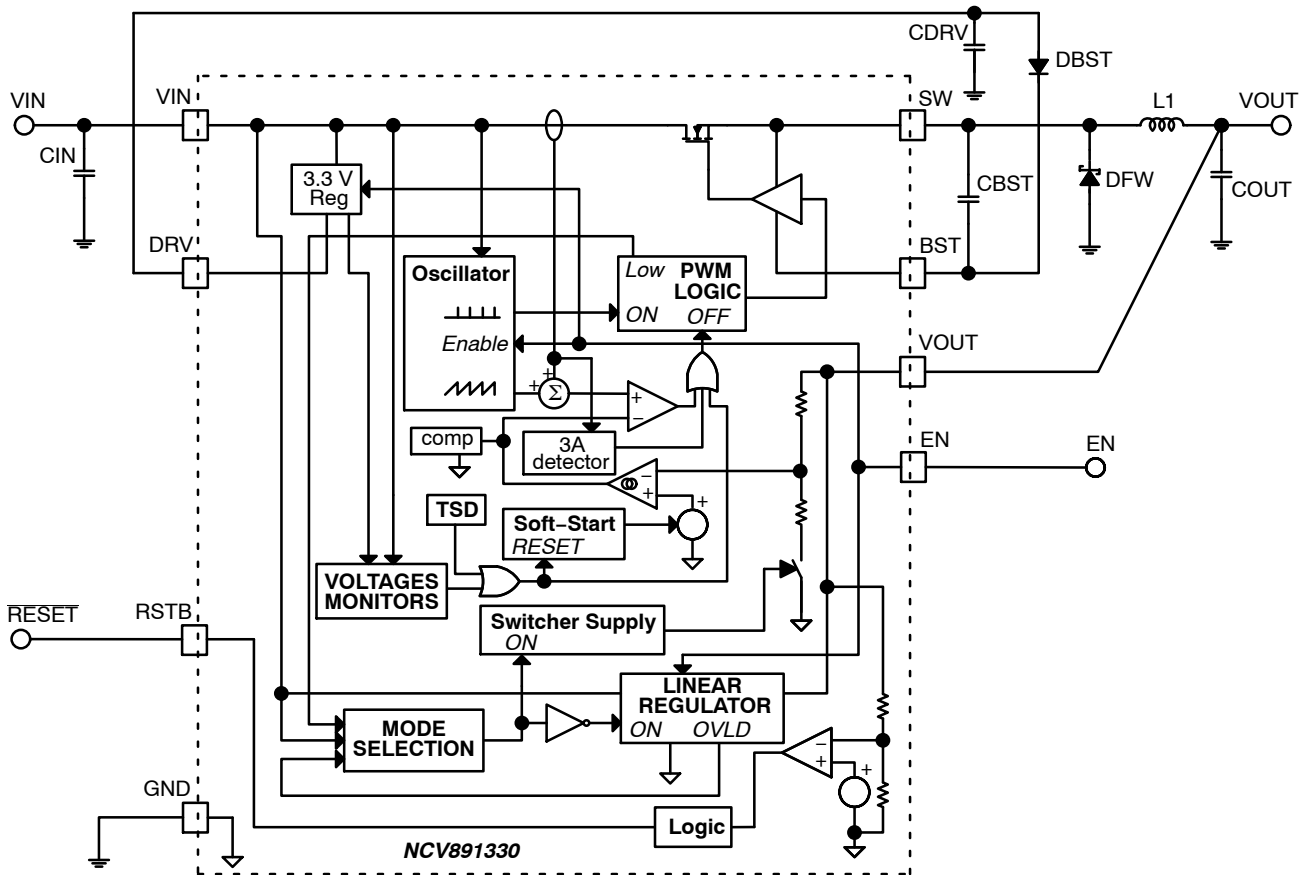


Figure 2. Simplified Block Diagram

Table 1. PIN FUNCTION DESCRIPTION

| Pin No. | Pin Name | Description |
|---------|----------|--|
| 1 | VIN | Input voltage from battery. Place an input filter capacitor in close proximity to this pin. |
| 2 | DRV | Output voltage to provide a regulated voltage to the Power Switch gate driver. |
| 3 | RSTB | Reset function. Open drain output, pulling down to ground when the output voltage is out of regulation. |
| 4 | GND | Battery return, and output voltage ground reference. |
| 5 | EN | This TTL compatible Enable input allows the direct connection of Battery as the enable signal. Grounding this input stops switching and reduces quiescent current draw to a minimum. |
| 6 | VOUT | Output voltage feedback and LDO output. Feedback of output voltage used for regulation, as well as LDO output in LDO mode. |
| 7 | BST | Bootstrap input provides drive voltage higher than VIN to the N-channel Power Switch for minimum switch Rdson and highest efficiency. |
| 8 | SW | Switching node of the Regulator. Connect the output inductor and cathode of the freewheeling diode to this pin. |
| EPAD | | Connect to Pin 4 (electrical ground) and to a low thermal resistance path to the ambient temperature environment. |

Table 2. ABSOLUTE MAXIMUM RATINGS

| Rating | Symbol | Value | Unit |
|---|------------------|-------------|------|
| Min/Max Voltage VIN | | –0.3 to 45 | V |
| Max Voltage VIN to SW | | 45 | V |
| Min/Max Voltage SW | | –0.7 to 40 | V |
| Min Voltage SW – 20 ns | | –3.0 | V |
| Min/Max Voltage EN | | –0.3 to 40 | V |
| Min/Max Voltage BST | | –0.3 to 43 | V |
| Min/Max Voltage BST to SW | | –0.3 to 3.6 | V |
| Min/Max Voltage on RSTB | | –0.3 to 6 | V |
| Min/Max Voltage VOUT | | –0.3 to 18 | V |
| Min/Max Voltage DRV | | –0.3 to 3.6 | V |
| Thermal Resistance, SOIC8–EP Junction–to–Ambient (Note 1) | R _{θJA} | 30 | °C/W |
| Storage Temperature range | | –55 to +150 | °C |
| Operating Junction Temperature Range | T _J | –40 to +150 | °C |
| ESD withstand Voltage (Note 2) Human Body Model | VESD | 2.0 | kV |
| Moisture Sensitivity | MSL | Level 2 | |
| Peak Reflow Soldering Temperature (Note 3) | | 260 | °C |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

- Value based on 4 layers of 645 mm² (or 1 in²) of 1 oz copper thickness on FR4 PCB substrate.
- This device series incorporates ESD protection and is tested by the following methods:
ESD Human Body Model tested per AEC–Q100–002 (EIA/JESD22–A114)
Latchup Current Maximum Rating: ≤ 150 mA per JEDEC standard: JESD78
- For information, please refer to our Soldering and Mounting Techniques Reference Manual, SOLDERM/D

Table 3. ELECTRICAL CHARACTERISTICS

V_{IN} = 4.5 to 28 V, V_{EN} = 5 V, V_{BST} = V_{SW} + 3 V, C_{DRV} = 0.1 μF, for typical values T_J = 25°C, Min/Max values are valid for the temperature range –40°C ≤ T_J ≤ 150°C unless noted otherwise, and are guaranteed by test, design or statistical correlation (Notes 4, 5)

| Parameter | Test Conditions | Symbol | Min | Typ | Max | Unit |
|-----------|-----------------|--------|-----|-----|-----|------|
|-----------|-----------------|--------|-----|-----|-----|------|

QUIESCENT CURRENT

| | | | | | | |
|-----------------------------|---|------------------|--|----|----|----|
| Quiescent Current, enabled | V _{IN} = 13.2 V, I _{OUT} = 100 μA, 25°C | I _q | | 30 | 39 | μA |
| Quiescent Current, shutdown | V _{IN} = 13.2 V, V _{EN} = 0 V, 25°C | I _{qSD} | | 9 | 12 | μA |

UNDERVOLTAGE LOCKOUT – VIN (UVLO)

| | | | | | | |
|----------------------|-------------------------|---------------------|-----|--|-----|---|
| UVLO Start Threshold | V _{IN} rising | V _{UVLSTT} | 4.1 | | 4.5 | V |
| UVLO Stop Threshold | V _{IN} falling | V _{UVLSTP} | 3.1 | | 3.7 | V |
| UVLO Hysteresis | | V _{UVLOHY} | 0.4 | | 1.4 | V |

SOFT–START (SS)

| | | | | | | |
|----------------------------|--|-----------------|-----|-----|-----|----|
| Soft–Start Completion Time | | t _{SS} | 0.8 | 1.4 | 2.0 | ms |
|----------------------------|--|-----------------|-----|-----|-----|----|

OUTPUT VOLTAGE

| | | | | | | |
|----------------------------------|---|---------------------|--------------|------------|--------------|---|
| Output Voltage during regulation | 100 μA < I _{OUT} < 2.5 A 5.0 V option 3.3 V option | V _{OUTReg} | 4.9 3.234 | 5.0 3.3 | 5.1 3.366 | V |
|----------------------------------|---|---------------------|--------------|------------|--------------|---|

OSCILLATOR

| | | | | | | |
|-----------|--|--|------------|------------|------------|-----|
| Frequency | 4.5 < V _{IN} < 18 V 20 V < V _{IN} < 28V | F _{SW} F _{SW(HV)} | 1.8 0.9 | 2.0 1.0 | 2.2 1.1 | MHz |
|-----------|--|--|------------|------------|------------|-----|

- Refer to ABSOLUTE MAXIMUM RATINGS and APPLICATION INFORMATION for Safe Operating Area.
- Performance guaranteed over the indicated operating temperature range by design and/or characterization tested at T_J = T_A = 25°C. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.

Table 3. ELECTRICAL CHARACTERISTICS

$V_{IN} = 4.5$ to 28 V, $V_{EN} = 5$ V, $V_{BST} = V_{SW} + 3$ V, $C_{DRV} = 0.1$ μ F, for typical values $T_J = 25^\circ\text{C}$, Min/Max values are valid for the temperature range $-40^\circ\text{C} \leq T_J \leq 150^\circ\text{C}$ unless noted otherwise, and are guaranteed by test, design or statistical correlation (Notes 4, 5)

| Parameter | Test Conditions | Symbol | Min | Typ | Max | Unit |
|---|---|---|------------------|------------------|------------------|------------|
| VIN FREQUENCY FOLDBACK MONITOR | | | | | | |
| Frequency Foldback Threshold V_{IN} rising V_{IN} falling | | V_{FLDUP} V_{FLDDN} | 18.4 18 | | 20 19.8 | V |
| Frequency Foldback Hysteresis | | V_{FLDHY} | 0.2 | 0.3 | 0.4 | V |
| MODE TRANSITION | | | | | | |
| Normal to Low- I_q mode Current Threshold | $8\text{ V} < V_{IN} < 28\text{ V}$ | I_{NtoL} | 3 | | 40 | mA |
| Mode Transition Duration Switcher to Linear Linear to Switcher | | $t_{SWtoLIN}$ $t_{LINtoSW}$ | | 300 1 | 2 | μ s |
| Minimum time in Normal Mode before starting to monitor output current | | $t_{SWblank}$ | | 500 | | μ s |
| Linear to switcher transition at high V_{in} at low V_{in} | $V_{OUT} = 3.3\text{ V}$ | $V_{LINtoSW(HV)}$ $V_{LINtoSW(LV)}$ | 19 3.6 | | 28 4.5 | V |
| PEAK CURRENT LIMIT | | | | | | |
| Current Limit Threshold | | I_{LIM} | 3.9 | 4.4 | 4.9 | A |
| POWER SWITCH | | | | | | |
| ON Resistance | $V_{BST} = V_{SW} + 3.0\text{ V}$ | $R_{DS(on)}$ | | 180 | 360 | m Ω |
| Leakage current VIN to SW | $V_{SW} = 0$, $-40^\circ\text{C} \leq T_J \leq 85^\circ\text{C}$ | I_{LKSW} | | | 10 | μ A |
| Minimum ON Time | Measured at SW pin | t_{ONMIN} | 45 | | 70 | ns |
| Minimum OFF Time | Measured at SW pin At $F_{SW} = 2\text{ MHz}$ (normal) At $F_{SW} = 500\text{ kHz}$ (max duty cycle) | t_{OFFMIN} | 30 | 30 50 | 70 | ns |
| SLOPE COMPENSATION | | | | | | |
| Ramp Slope (With respect to switch current) | $4.5 < V_{IN} < 18\text{ V}$ $20\text{ V} < V_{IN} < 28\text{ V}$ | S_{ramp} $S_{ramp(HV)}$ | 1.45 0.65 | 2.0 1.0 | 2.8 1.3 | A/ μ s |
| LOW POWER LINEAR REGULATOR | | | | | | |
| Line Regulation | $I_{OUT} = 5\text{ mA}$, $6\text{ V} < V_{IN} < 18\text{ V}$ | $V_{REG(line)}$ | | 5 | 25 | mV |
| Load Regulation | $V_{IN} = 13.2\text{ V}$, $0.1\text{ mA} < I_{OUT} < 50\text{ mA}$ | $V_{REG(load)}$ | | 5 | 35 | mV |
| Power Supply Rejection | $V_{OUT(ripple)} = 0.5\text{ Vp-p}$, $F = 100\text{ Hz}$ | PSRR | | 65 | | dB |
| Current Limit | | $I_{LIN(lim)}$ | 50 | | 80 | mA |
| Output clamp current | $V_{OUT} = V_{OUTreg(typ)} + 10\%$ | $I_{CL(OUT)}$ | 0.5 | 1.0 | 1.5 | mA |
| SHORT CIRCUIT DETECTOR | | | | | | |
| Switching frequency in short-circuit condition Analog Foldback Analog foldback – high V_{IN} Hiccup Mode | $V_{OUT} = 0\text{ V}$, $4.5\text{ V} < V_{IN} < 18\text{ V}$ $V_{OUT} = 0\text{ V}$, $20\text{ V} < V_{IN} < 28\text{ V}$ | F_{SWAF} F_{SWAFHV} F_{SWHIC} | 450 225 24 | 550 275 32 | 650 325 40 | kHz |
| RESET | | | | | | |
| Leakage current into RSTB pin | | I_{RSTBIK} | | | 1 | μ A |
| Output voltage threshold at which the RSTB signal goes low | V_{OUT} decreasing 5.0 V option 3.3 V option | V_{RESET} | 4.50 2.97 | 4.625 3.05 | 4.75 3.14 | V |

4. Refer to ABSOLUTE MAXIMUM RATINGS and APPLICATION INFORMATION for Safe Operating Area.

5. Performance guaranteed over the indicated operating temperature range by design and/or characterization tested at $T_J = T_A = 25^\circ\text{C}$. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.

Table 3. ELECTRICAL CHARACTERISTICS

$V_{IN} = 4.5$ to 28 V, $V_{EN} = 5$ V, $V_{BST} = V_{SW} + 3$ V, $C_{DRV} = 0.1$ μ F, for typical values $T_J = 25^\circ\text{C}$, Min/Max values are valid for the temperature range $-40^\circ\text{C} \leq T_J \leq 150^\circ\text{C}$ unless noted otherwise, and are guaranteed by test, design or statistical correlation (Notes 4, 5)

| Parameter | Test Conditions | Symbol | Min | Typ | Max | Unit |
|-----------|-----------------|--------|-----|-----|-----|------|
|-----------|-----------------|--------|-----|-----|-----|------|

RESET

| | | | | | | |
|------------------------------|--|---------------|----------|----------|-----------|---------|
| Hysteresis on RSTB threshold | V_{OUT} increasing 5.0 V option 3.3 V option | V_{RESHys} | 25 17 | 60 40 | 100 66 | mV |
| Noise-filtering delay | From $V_{OUT} < V_{RESET}$ to RSTB pin going low | t_{filter} | 10 | | 25 | μ s |
| Restart Delay time | From $V_{OUT} > V_{RESET} + V_{RESHys}$ to high RSTB | t_{delay} | 14 | 16 | 18 | ms |
| Low RSTB voltage | $R_{RSTBpullup} = V_{OUTreg}/1$ mA, $V_{OUT} > 1$ V | $V_{RSTBLOW}$ | | | 0.4 | V |

GATE VOLTAGE SUPPLY (DRV pin)

| | | | | | | |
|--------------------------|-----------------|--------------|-----|-----|------|----|
| Output Voltage | | V_{DRV} | 3.1 | 3.3 | 3.5 | V |
| DRV UVLO START Threshold | | V_{DRVSTT} | 2.7 | 2.9 | 3.05 | V |
| DRV UVLO STOP Threshold | | V_{DRVSTP} | 2.5 | 2.8 | 3.0 | V |
| DRV UVLO Hysteresis | | V_{DRVHYS} | 50 | | 200 | mV |
| DRV Current Limit | $V_{DRV} = 0$ V | I_{DRVLIM} | 21 | | 50 | mA |

VIN OVERVOLTAGE SHUTDOWN MONITOR

| | | | | | | |
|-----------------------------|---------------------|-------------|------|------|------|---|
| Overvoltage Stop Threshold | V_{IN} increasing | V_{OVSTP} | 36.5 | 37.7 | 39.0 | V |
| Overvoltage Start Threshold | V_{IN} decreasing | V_{OVSTT} | 36.0 | 37.3 | 38.8 | V |
| Overvoltage Hysteresis | | V_{OVHY} | 0.25 | 0.40 | 0.50 | V |

ENABLE (EN)

| | | | | | | |
|------------------------------|--|--------------|-----|--|---|---------|
| Logic low threshold voltage | | V_{ENlow} | 0.8 | | | V |
| Logic high threshold voltage | | V_{ENhigh} | | | 2 | V |
| EN pin input current | | I_{ENbias} | 0.2 | | 1 | μ A |

THERMAL SHUTDOWN

| | | | | | | |
|------------------------|--|-----------------|-----|--|-----|------------------|
| Activation Temperature | | TSD | 155 | | 190 | $^\circ\text{C}$ |
| Reset temperature | | $TSD_{restart}$ | 135 | | 185 | $^\circ\text{C}$ |
| Hysteresis | | T_{HYS} | 5 | | 20 | $^\circ\text{C}$ |

4. Refer to ABSOLUTE MAXIMUM RATINGS and APPLICATION INFORMATION for Safe Operating Area.
5. Performance guaranteed over the indicated operating temperature range by design and/or characterization tested at $T_J = T_A = 25^\circ\text{C}$. Low duty cycle pulse techniques are used during testing to maintain the junction temperature as close to ambient as possible.

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL CHARACTERISTICS

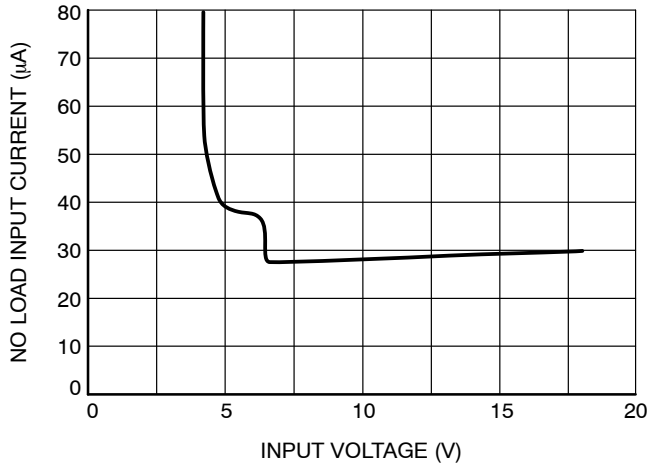


Figure 3. No-load Input Current at $T_J = 25^{\circ}\text{C}$ vs. Input Voltage

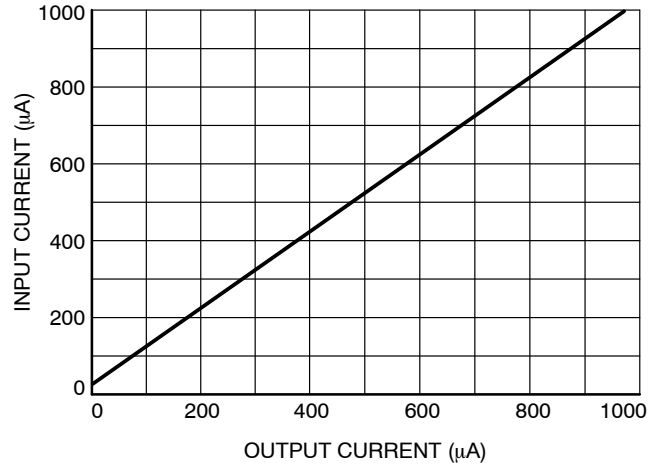


Figure 4. Input Current at $T_J = 25^{\circ}\text{C}$ vs. Output Current

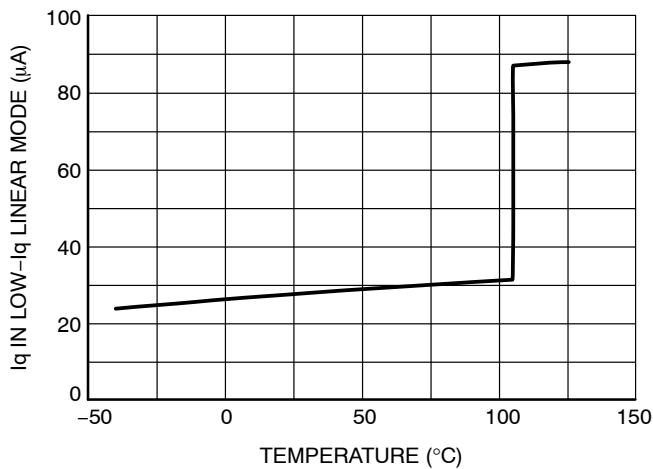


Figure 5. Low- I_q Mode Quiescent Current vs. Junction Temperature

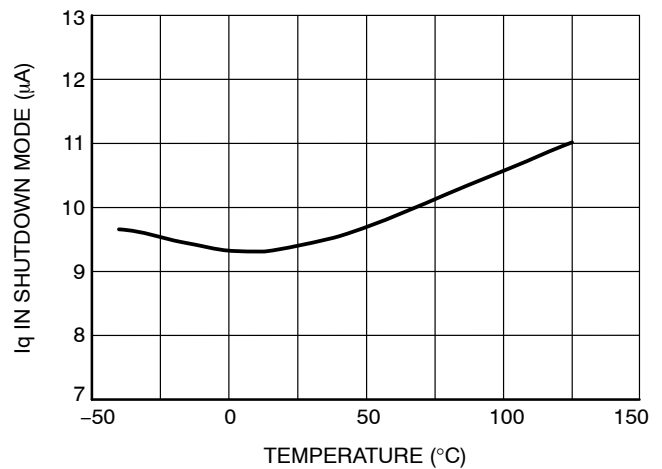


Figure 6. Shutdown Mode Quiescent Current vs. Junction Temperature

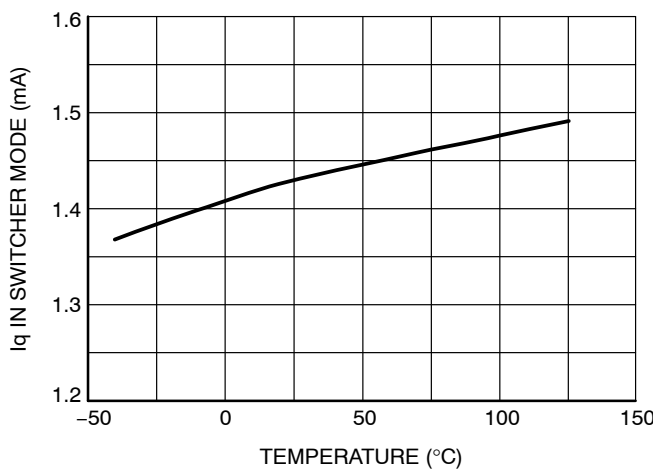


Figure 7. Switching Mode Quiescent Current vs. Junction Temperature

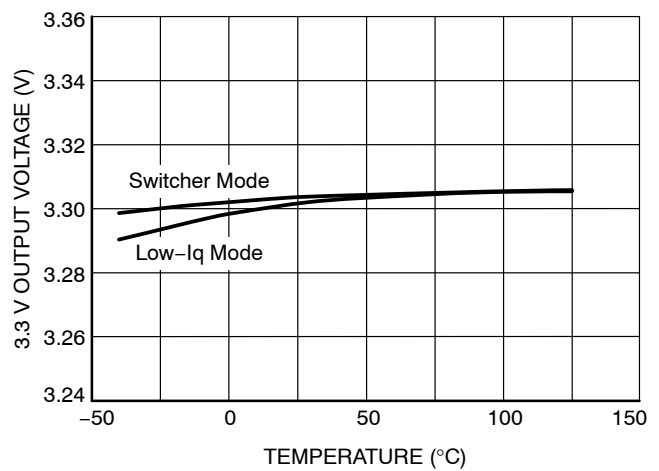


Figure 8. 3.3 V Output Voltage vs. Junction Temperature

TYPICAL CHARACTERISTICS

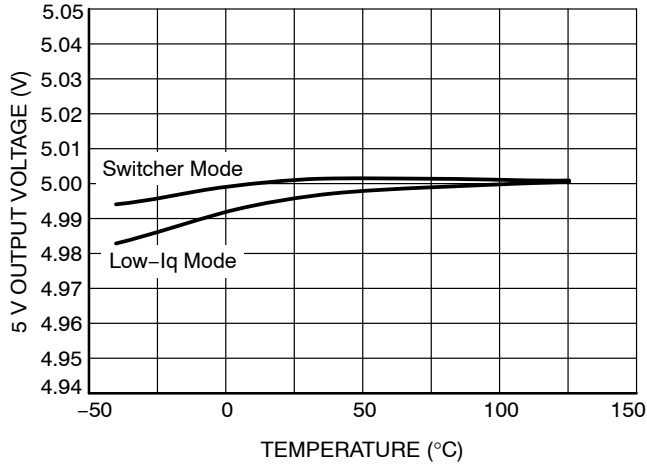


Figure 9. 5.0 V Output Voltage vs. Junction Temperature

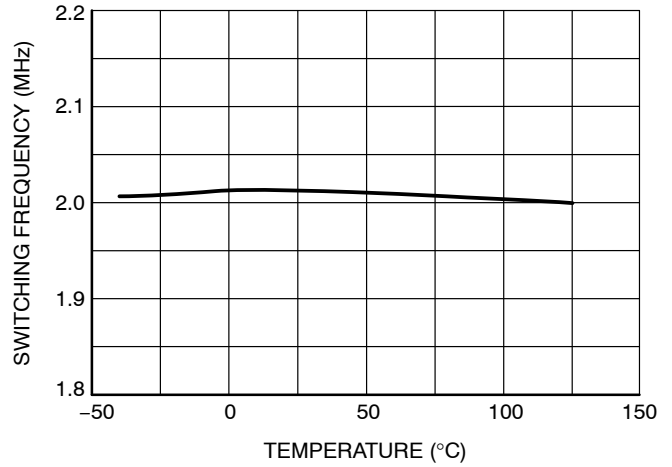


Figure 10. Switching Frequency vs. Junction Temperature

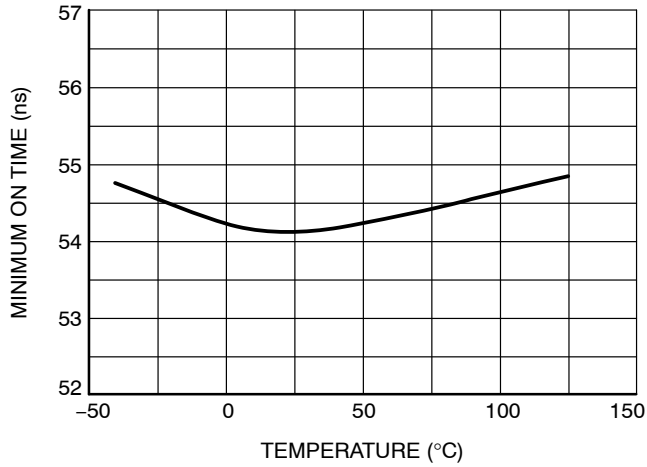


Figure 11. Minimum On Time vs. Junction Temperature

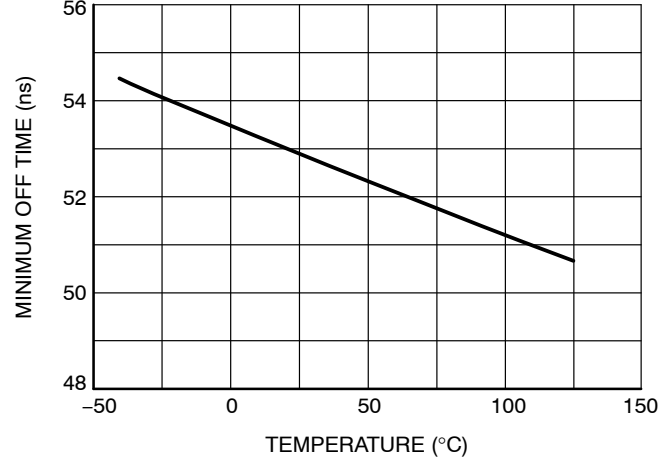


Figure 12. Minimum Off Time vs. Junction Temperature

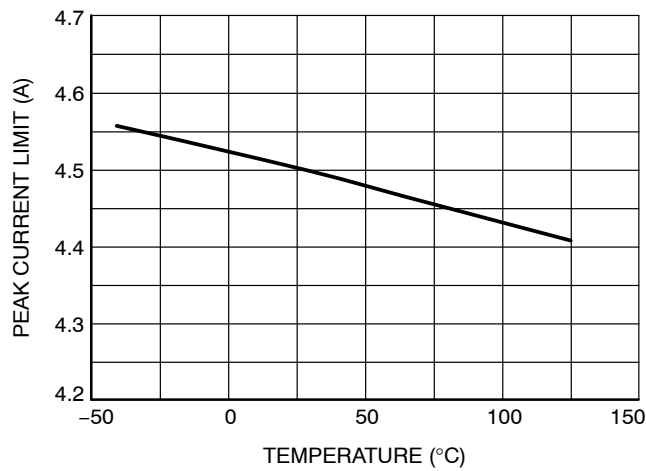


Figure 13. Peak Current Limit vs. Junction Temperature

TYPICAL CHARACTERISTICS

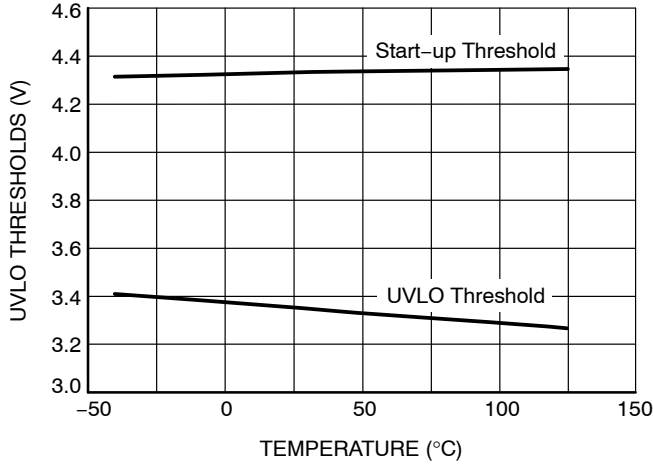


Figure 14. UVLO Thresholds vs. Junction Temperature

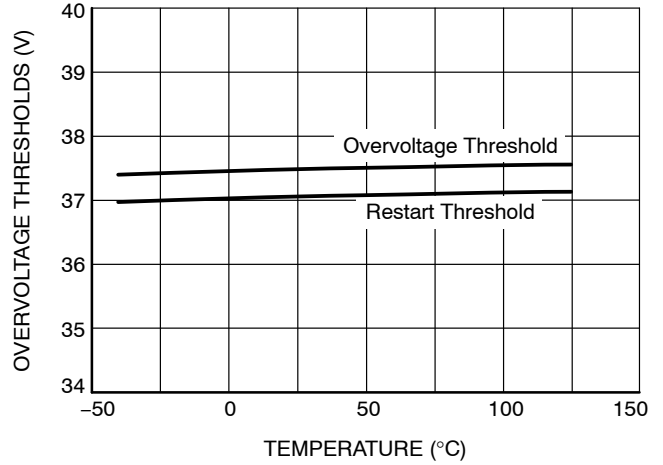


Figure 15. Input Overvoltage Thresholds vs. Junction Temperature

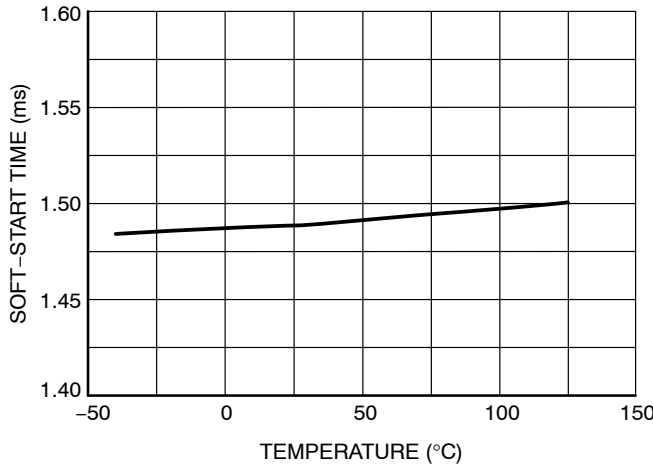


Figure 16. Soft-start Duration vs. Junction Temperature

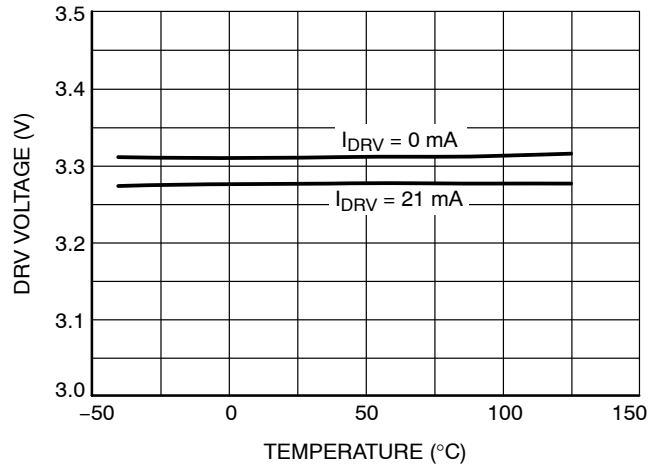


Figure 17. DRV Voltage vs. Junction Temperature

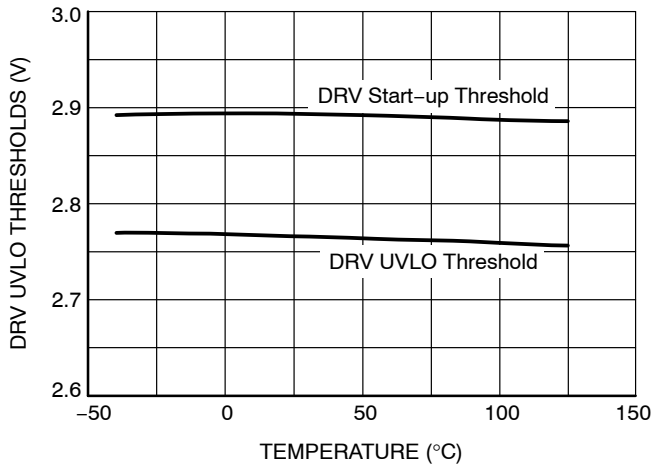


Figure 18. DRV Voltage UVLO Thresholds vs. Junction Temperature

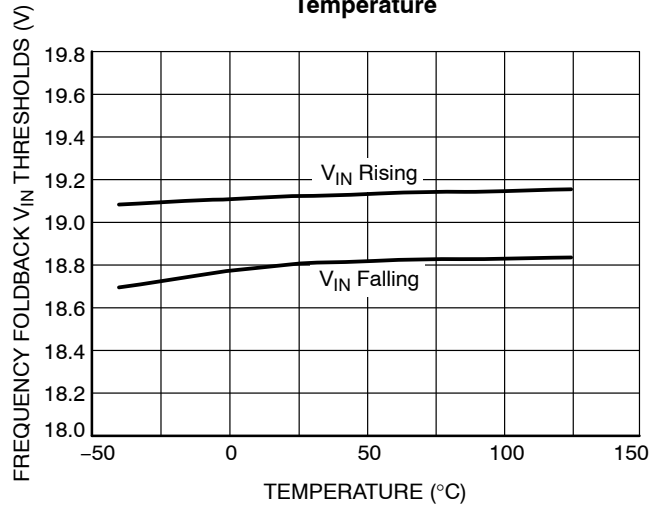


Figure 19. Frequency Foldback Voltage Thresholds vs. Junction Temperature

TYPICAL CHARACTERISTICS

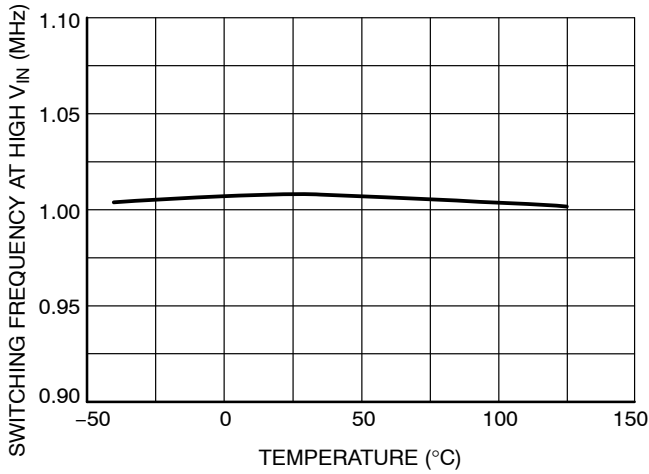


Figure 20. Foldback Frequency vs. Junction Temperature

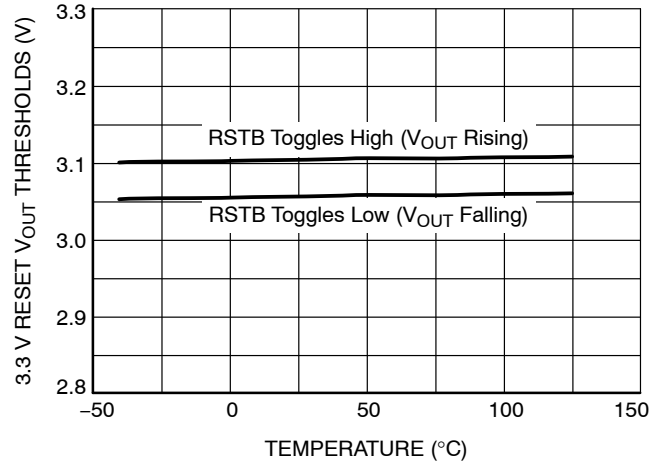


Figure 21. 3.3 V Version RESET Thresholds vs. Junction Temperature

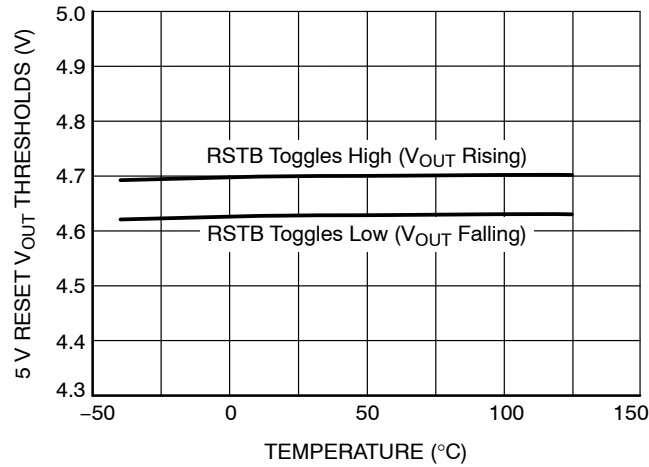


Figure 22. 5.0 V Version RESET Thresholds vs. Junction Temperature

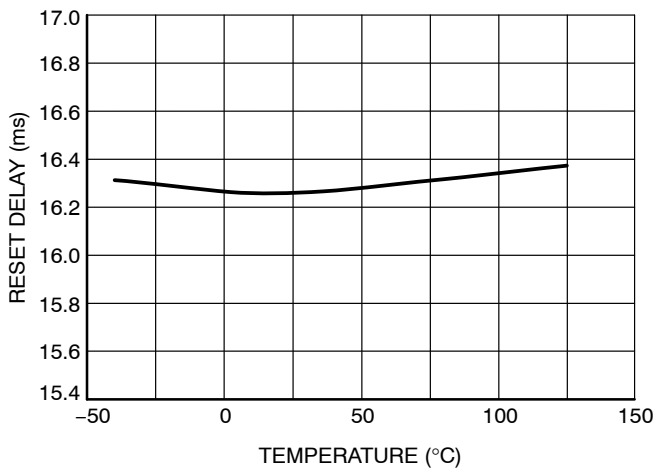


Figure 23. RESET Delay vs. Junction Temperature

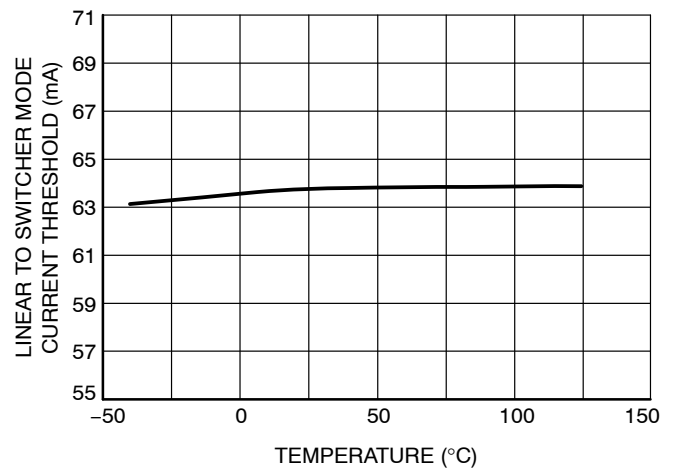


Figure 24. Low-I_q to Switcher Mode Transition vs. Junction Temperature

TYPICAL CHARACTERISTICS

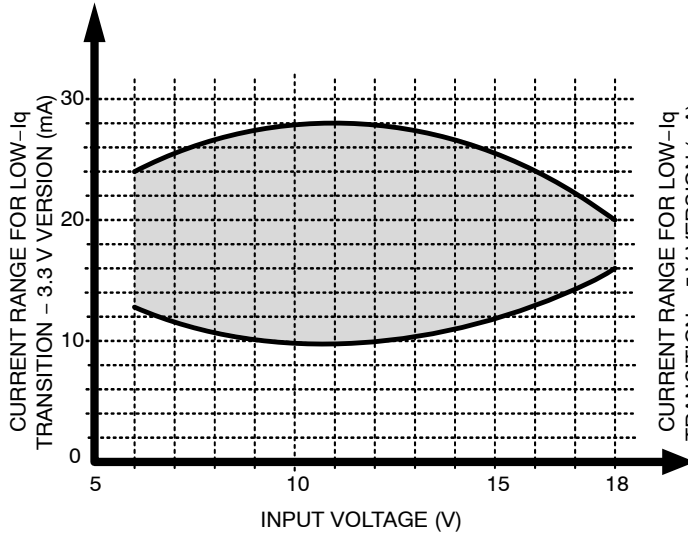


Figure 25. Switcher to Low-Iq Mode Transition (3.3 V Version, 2.2 μ H) vs. Input Voltage

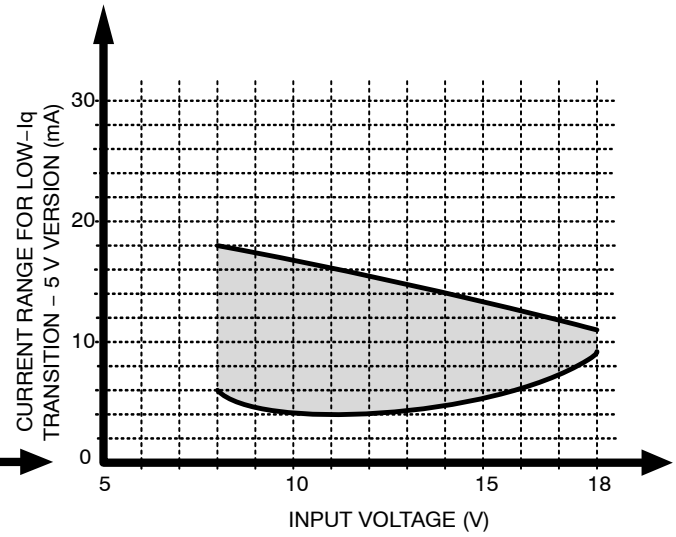


Figure 26. Switcher to Low-Iq Mode Transition (5.0 V Version, 2.2 μ H) vs. Input Voltage

Input Voltage

An Undervoltage Lockout (UVLO) circuit monitors the input. The circuit can inhibit switching and reset the Soft-start circuit if there is insufficient voltage for proper regulation. Depending on the output conditions (voltage option and loading), the NCV891330 may lose regulation and run in drop-out mode before reaching the UVLO threshold: refer to the Minimum V_{IN} calculation tool for details. When the input voltage drops low enough that the part cannot regulate because it reaches its maximum duty cycle, the switching frequency is divided down by up to 4 (down to 500 kHz). This helps lowering the minimum voltage at which the regulator loses regulation.

An overvoltage monitoring circuit automatically terminates switching if the input voltage exceeds V_{OVSTP} (see Figure 28), but the NCV891330 can withstand input voltages up to 45 V.

To avoid skipping switching pulses and entering an uncontrolled mode of operation, the switching frequency is reduced by a factor of 2 when the input voltage exceeds the V_{IN} Frequency Foldback threshold (see Figure 28). Frequency reduction is automatically terminated when the input voltage drops back below the V_{IN} Frequency Foldback threshold. This also helps to limit the power lost in switching and generating the drive voltage for the Power Switch.

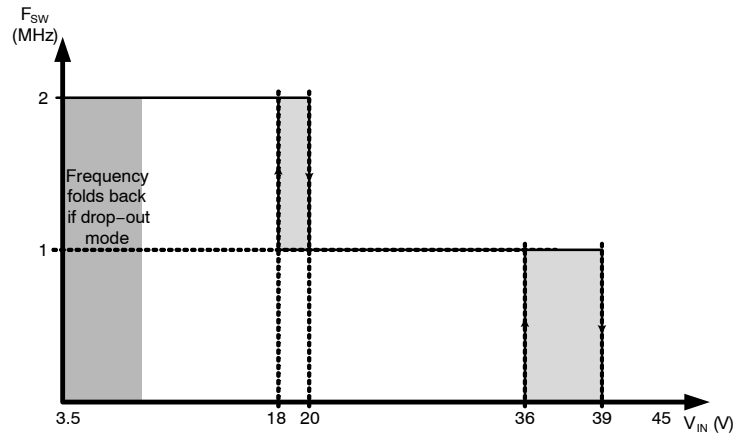


Figure 28. NCV891330 Switching Frequency Profile vs. Input Voltage

Soft-Start

Upon being enabled or released from a fault condition, and after the DRV voltage is established, a soft-start circuit ramps the switching regulator error amplifier reference voltage to the final value. During soft-start, the average switching frequency is lower until the output voltage approaches regulation.

Slope Compensation

A fixed slope compensation signal is generated internally and added to the sensed current to avoid increased output voltage ripple due to bifurcation of inductor ripple current at duty cycles above 50%. The fixed amplitude of the slope

compensation signal requires the inductor to be greater than a minimum value, depending on output voltage, in order to avoid sub-harmonic oscillations. The recommended inductor values are 2.2 or 3.3 μ H, although higher values are possible.

Current Limiting

Due to the ripple on the inductor current, the average output current of a buck converter is lower than the peak current setpoint of the regulator. Figure 29 shows – for a 2.2 μ H inductor – how the variation of inductor peak current with input voltage affects the maximum DC current the NCV891330 can deliver to a load.

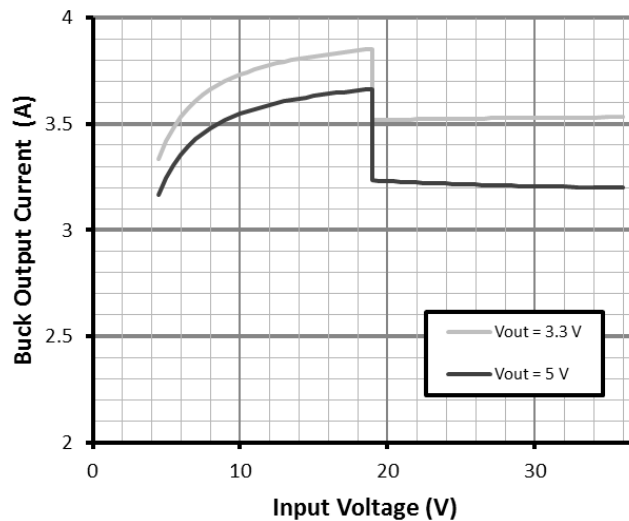


Figure 29. NCV891330 Load Current Capability with a 2.2 μ H Inductor

Short Circuit Protection

During severe output overloads or short circuits, the NCV891330 automatically reduces its switching frequency. This creates duty cycles small enough to limit the peak current in the power components, while maintaining the ability to automatically reestablish the output voltage if the overload is removed.

In more severe short-circuit conditions where the inductor current is still too high after the switching frequency has fully folded back, the regulator enters a hiccup mode that further reduces the power dissipation and protects the system.

RESET Function

The RSTB pin is pulled low when the output voltage falls below 7.5% of the nominal regulation level, and floats when the output is properly regulated. A pull-up resistor tied to the output is needed to generate a logic high signal on this open drain pin. The pin can be left unconnected when not used.

When the output voltage drops out of regulation, the pin goes low after a short noise-filtering delay (t_{filter}). It stays low

for a 16 ms delay time after the output goes back to regulation, simplifying the connection to a micro-controller.

The RSTB pin is also pulled low immediately in case of VIN overvoltage, Thermal shutdown, VIN UVLO or DRV UVLO.

Feedback Loop

All components of the feedback loop (output voltage sensing, error amplifier and compensation) are integrated inside the NCV891330, and are optimized to ensure regulation and sufficient phase and gain margin for the recommended conditions of operation.

Recommended conditions and components:

- Input: car battery
- Output: 3.3 V, or 5 V, with output current up to 3 A
- Output capacitor: 30 μ F capacitance
- Inductor: 2.2 μ H to 3.3 μ H

With these operating conditions and components, the open loop transfer function has a phase margin greater than 50°, as can be seen in Figure 30.

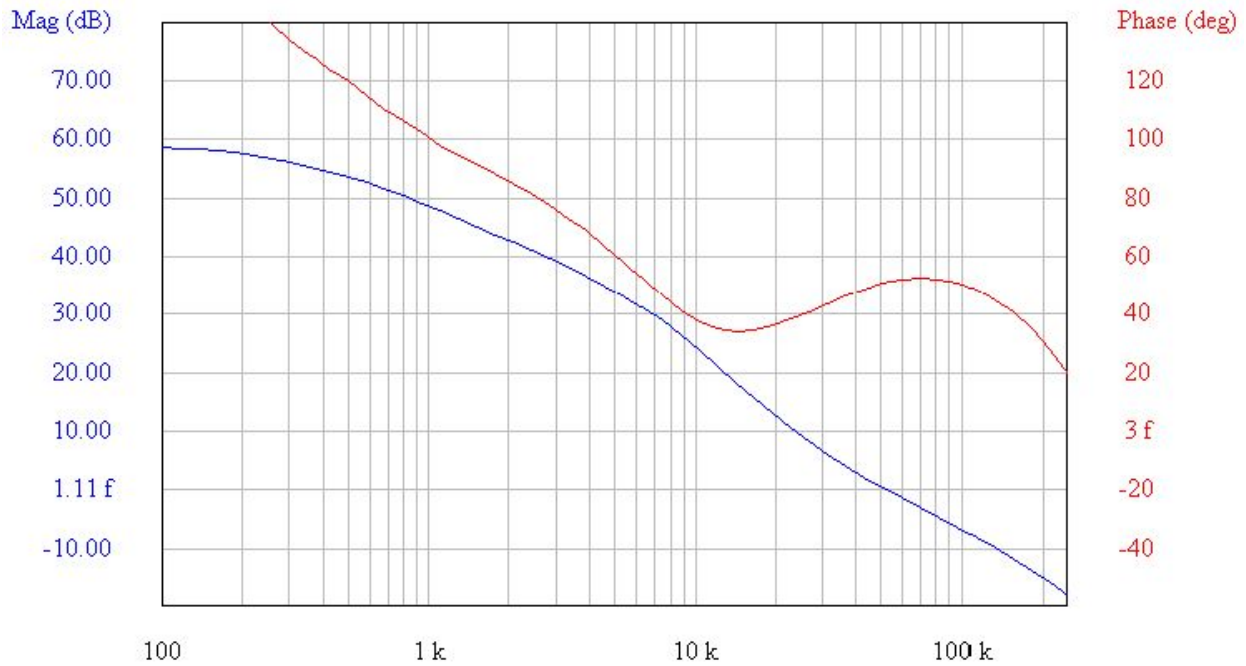


Figure 30. Bode Plot of the Open Loop Transfer Function of a Buck Converter using the NCV891330 for $V_{in} = 13\text{ V}$, $V_{out} = 3.3\text{ V}$, $I_{out} = 2\text{ A}$, $C_{out} = 3 \times 10\text{ }\mu\text{F}$ and $L = 2.2\text{ }\mu\text{H}$

For more details and for effect of component values other than the recommended ones, please refer to the design spreadsheet provided on the www.onsemi.com NCV891330 page.

The design spreadsheet also includes the total open loop transfer function for the output voltage sensing at the NCV891330 VOUT pin to the output voltage.

Bootstrap

At the DRV pin an internal regulator provides a ground-referenced voltage to an external capacitor (C_{DRV}), to allow fast recharge of the external bootstrap capacitor (C_{BST}) used to supply power to the power switch gate driver. If the voltage at the DRV pin goes below the DRV UVLO Threshold V_{DRVSTB} , switching is inhibited and the Soft-start circuit is reset, until the DRV pin voltage goes back up above V_{DRVSTT} .

The NCV891330 permanently monitors the bootstrap capacitor, and always ensures it stays charged no matter what the operating conditions are. As a result, the additional charging current for the bootstrap capacitor may prevent the regulator from entering Low- I_q mode at low input voltage. Practically, the 5 V output version does not enter Low- I_q mode for input voltages below 8 V, (see typical characteristics curves for details).

Enable

The NCV891330 is designed to accept either a logic level signal or battery voltage as an Enable signal. However if voltages above 40 V are expected, EN should be tied to VIN through a 10 k Ω resistor in order to limit the current flowing into the overvoltage protection of the pin.

EN low induces a shutdown mode which shuts off the regulator and minimizes its supply current to 9 μA typical by disabling all functions.

Upon enabling, voltage is established at the DRV pin, followed by a soft-start of the switching regulator output.

Thermal Shutdown

A thermal shutdown circuit inhibits switching, resets the Soft-start circuit, and removes DRV voltage if internal temperature exceeds a safe level. Switching is automatically restored when temperature returns to a safe level.

Exposed Pad

The exposed pad (EPAD) on the back of the package must be electrically connected to the electrical ground (GND pin) for proper, noise-free operation.

NCV891330

ORDERING INFORMATION

| Device | Output | Package | Shipping [†] |
|------------------|--------|------------------------|-----------------------|
| NCV891330PD50R2G | 5.0 V | SOIC-8 EP (Pb-Free) | 2500 / Tape & Reel |
| NCV891330PD33R2G | 3.3 V | | |

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).

MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS





SCALE 1:1

SOIC-8 EP CASE 751AC ISSUE E

DATE 05 OCT 2022

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE PROTRUSION SHALL BE 0.004 IN EXCESS OF MAXIMUM MATERIAL CONDITION.
4. DIMENSION D DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.006 PER SIDE. DIMENSION E1 DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.010 mm PER SIDE.
5. THE PACKAGE TOP MAY BE SMALLER THAN THE PACKAGE BOTTOM. DIMENSIONS D AND E1 ARE DETERMINED AT THE OUTERMOST EXTREMES OF THE PLASTIC BODY AT DATUM H.
6. DATUMS A AND B ARE TO BE DETERMINED AT DATUM H.
7. DIMENSIONS b and c APPLY TO THE FLAT SECTION OF THE LEAD BETWEEN 0.10 TO 0.25 FROM THE LEAD TIP.
8. A1 IS DEFINED AS THE VERTICAL DISTANCE FROM THE SEATING PLANE TO THE LOWEST POINT ON THE PACKAGE BODY.

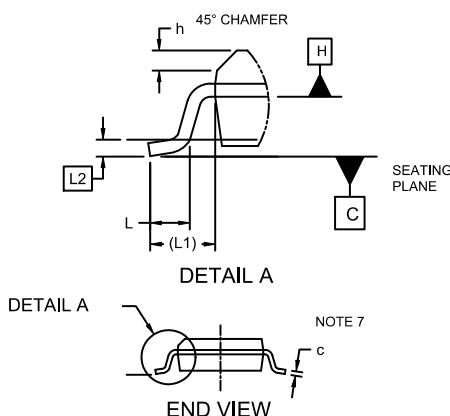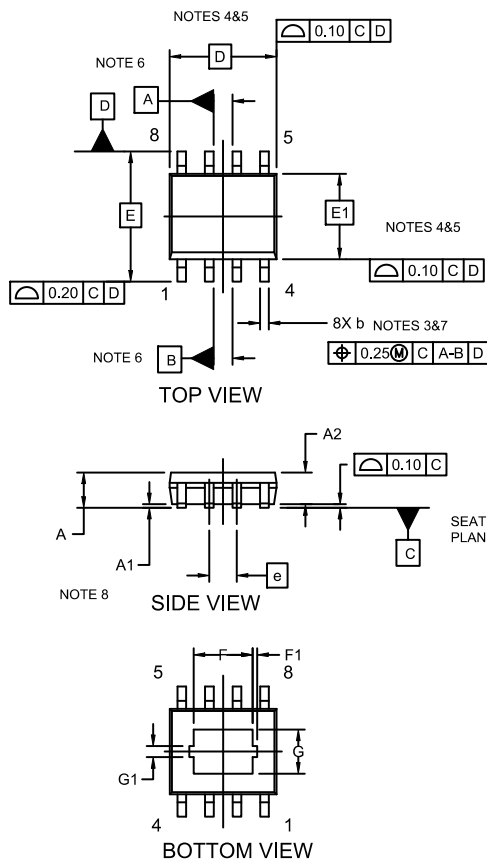


| DIM | MILLIMETERS | | |
|-----|-------------|------|------|
| | MIN. | NOM. | MAX. |
| A | 1.35 | 1.55 | 1.75 |
| A1 | --- | 0.05 | 0.10 |
| A2 | 1.35 | 1.50 | 1.65 |
| b | 0.31 | 0.41 | 0.51 |
| c | 0.17 | 0.21 | 0.23 |
| D | 4.90 BSC | | |
| E | 6.00 BSC | | |
| E1 | 3.90 BSC | | |
| e | 1.27 BSC | | |
| F | 2.24 | 2.72 | 3.20 |
| F1 | 0.20 REF | | |
| G | 1.55 | 2.03 | 2.51 |
| G1 | 0.46 REF | | |
| h | 0.25 | 0.38 | 0.50 |
| L | 0.40 | 0.84 | 1.27 |
| L1 | 1.04 REF | | |
| L2 | 0.25 REF | | |
| Ø | 0° | 4° | 8° |

RECOMMENDED MOUNTING FOOTPRINT*

*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D."

GENERIC MARKING DIAGRAM*



XXXXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
■ = Pb-Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present and may be in either location. Some products may not follow the Generic Marking.

| | | |
|------------------|-------------|--|
| DOCUMENT NUMBER: | 98AON14029D | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION: | SOIC-8 EP | PAGE 1 OF 1 |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales