

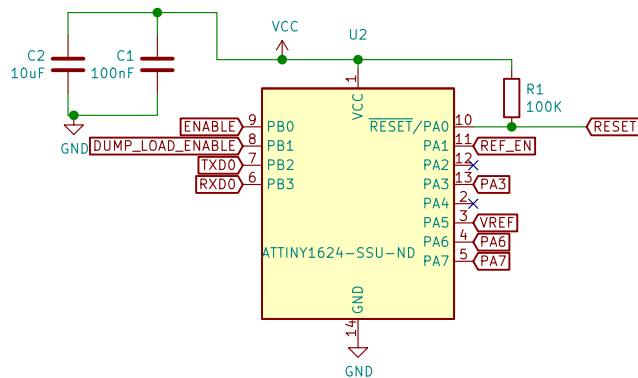

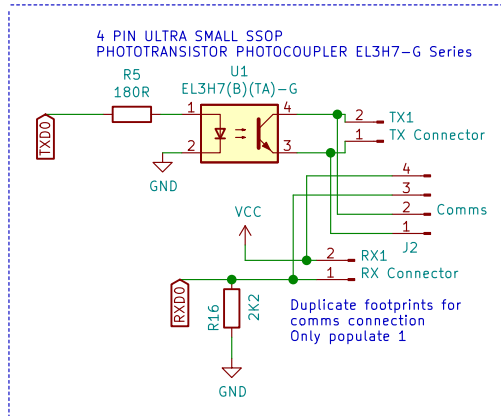
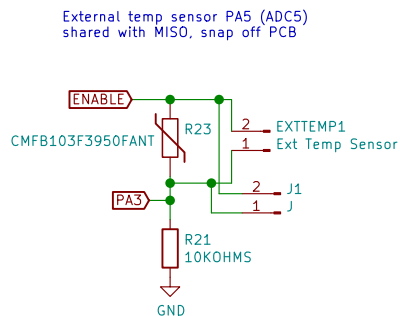


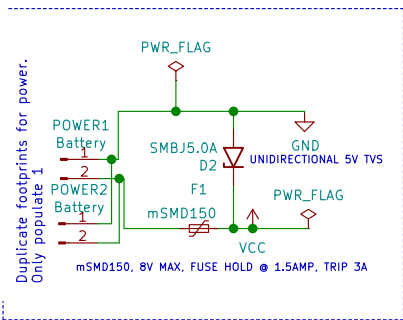
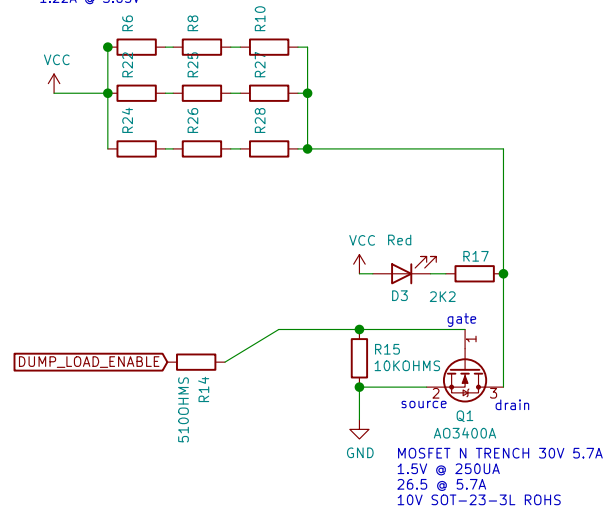


FOR LITHIUM VOLTAGE RANGES (18650 etc.) 2.0V – 4.2V

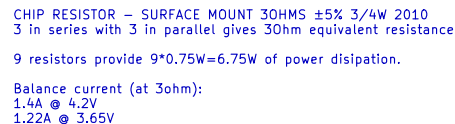

Change pin for Reference EN – its 2nd TX serial port so useful for DEBUG?

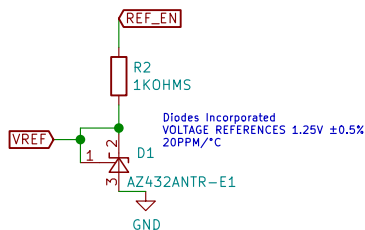

Id: 1/1