


[Shop](#) [Learn](#) [Blog](#) [Forums](#) [IO](#) [LIVE!](#) [AdaBox](#) [Account](#) [0](#)

 [Devices](#) [Feeds](#) [Dashboards](#) [Actions](#) [Power-Ups](#) 

HeberC2003 / Dashboards / test    

September 28th 2026, 2:08:48PM

What is Adafruit IO?

Get Help

Quick Guides

API Documentation

FAQ

IO Status 

Learn

IO Plus

News

"Nothing in life is to be feared, it is only to be understood. Now is the time to understand more, so that we may fear less."

plantillaAdafruitIO | Arduino IDE 2.3.10
File Edit Sketch Tools Help

   ESP32 Dev Module

plantillaAdafruitIO.ino


```
27 //
28 #define WLAN_PASS "8/654321"
29 //***** Adafruit.io Setup *****/
30
31 #define AIO_SERVER "io.adafruit.com"
32
33 // Using port 8883 for MQTTS
34 #define AIO_SERVERPORT 8883
35
36 // Adafruit IO Account Configuration
37 // (to obtain these values, visit https://io.adafruit.com and click on Active Key)
38 #define AIO_USERNAME "HeberC2003"
39 #define AIO_KEY "aio_vnqz07ah9Jpz2bp8PACjcSMimg2t"
40
41 //***** Global State (you don't need to change this!) *****/
42
43 // WiFiClientSecure for SSL/TLS support
44 WiFiClientSecure client;
45
46 // Setup the MQTT client class by passing in the WiFi client and MQTT server and login details.
47 Adafruit_MQTT_Client mqtt(&client, AIO_SERVER, AIO_SERVERPORT, AIO_USERNAME, AIO_KEY);
48
49 // io.adafruit.com root CA
```

Output Serial Monitor

Writing at 0x001029f0 [=====] 100.0% 651994/651994 bytes...
Wrote 993776 bytes (651994 compressed) at 0x00010000 in 59.9 seconds (132.7 kbit/s).
Verifying written data...
Hash of data verified.

Hard resetting via RTS pin...

Io 27 Col 29 ESP32 Dev Module on COM14

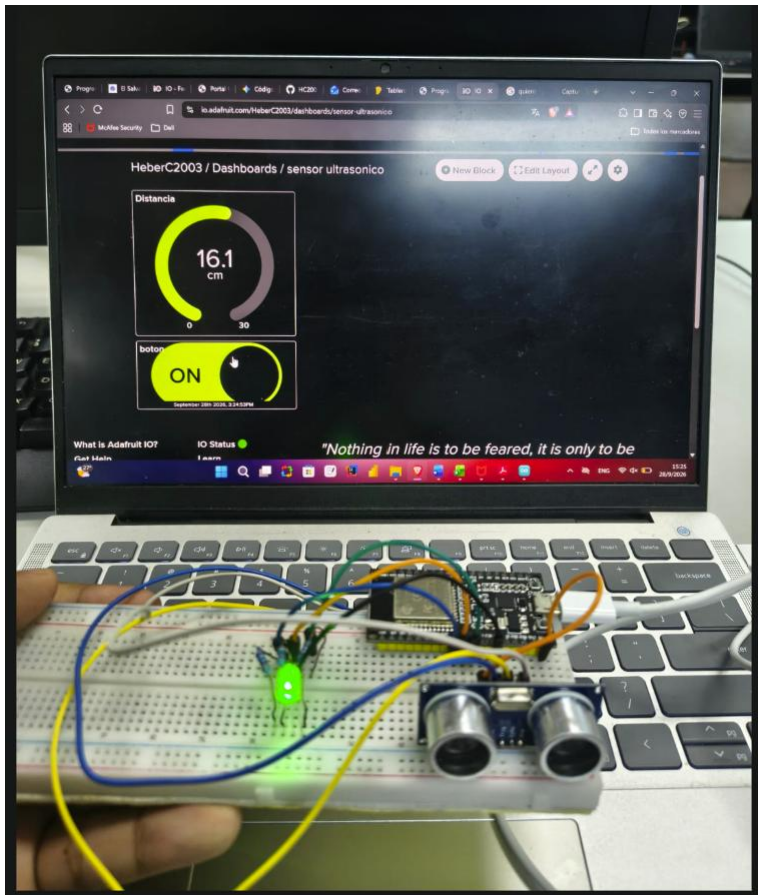

https://github.com/HC2003/laboratorio05_Artefactos.git