

GyroWash

Colour Fastness to Laundering Tester

Available as 8 and 20 pot instruments, the GyroWash is a colour fastness to laundering tester for textiles and leather, according to AATCC and ISO standards.



Featuring the most simple to use touchscreen user interface on the market.



GyroWash

COLOUR FASTNESS TO LAUNDERING TESTER

GyroWash colour fastness to laundering tester, available in 8 and 20 pots models, features our new intuitive touchscreen user interface for a simple and efficient test set-up, push and rotate pot change for quick and easy loading and an energy efficient insulated bath.

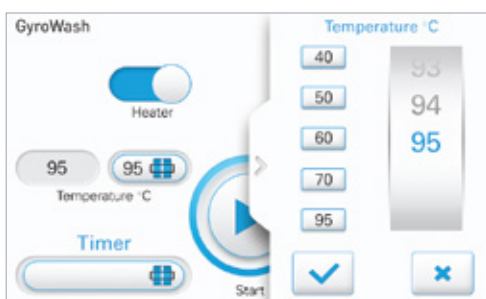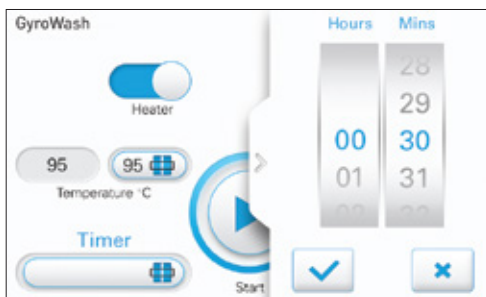

KEY BENEFITS

TOUCHSCREEN USER INTERFACE

An intuitive touchscreen user interface, designed alongside textile technicians in a working laboratory, offers testing which is simple to set up.

Temperature settings, rotational speed and an autostart function can all be controlled from the touchscreen.

CHOICE OF CAPACITY

The GyroWash comes in both 8 and 20 pot models, with a choice of 1200ml and 500ml pots.

INTERCHANGEABLE VESSELS

A push and rotate twist motion makes changing between 1200ml and 500ml pots quick and easy.

COOL TOUCH LID

Safe access to samples after the instrument has operated at extremely high temperatures is made possible through a cool touch lid.

INSULATED BATH

A sealed and insulated bath results in lower energy usage, making the instrument more efficient.

HIGH WASHING TEMPERATURE LIDS

For textile testing laboratories performing colour fastness to washing and cleansing procedures above 60°C, James Heal have developed optional high washing temperature lids which contain the wash liquor without leakage.

These guarantee complete confidence in results, and accessories allow for easy access after the test.

A RANGE OF STANDARDS

Both ISO and AATCC standards, and several retailer methods, can be tested on GyroWash.

QUICK DRAIN AND FILL

Easy to reach fittings on the front of the instrument make draining and filling the instrument with water easy to do.

DEDICATED PREPARATION AREA

An integrated drip tray collects any surplus water which drains away without the need for emptying.

FULL RANGE OF TEST MATERIALS

A comprehensive selection of high quality test materials, including greyscales, detergents and multifibres, are available for the GyroWash.

Dimensions (mm) Weight (kgs)

	Height	Width	Depth	
GyroWash - 8 pot	1040	876	731	135.0
GyroWash - 20 pot	1040	1266	731	238.0

CONTACT US

For more information

tel: +44 (0) 1422 366 355

email: sales@james-heal.co.uk

web: www.james-heal.co.uk/en/gyrowash

James Heal Richmond Works Halifax UK HX3 6EP