



1	2		3	4		5	
	<del>'</del>	•	•		•		
]							ı
				Sheet: /Signal Processing	'STM32 /		
				Janeer / Signal Flocessing/	311132/		
				Sheet: /Signal Processing/ File: microcontroller.sch			
				Title:			
				me:			
				Size: A4 Date: KiCad E.D.A. kicad (5.0.0)			Day:
				SIZE. AT Date:			Rev: ld: 3/7
1				KiCad E.D.A. kicad (5.0.0)			Id: 3/7
1							



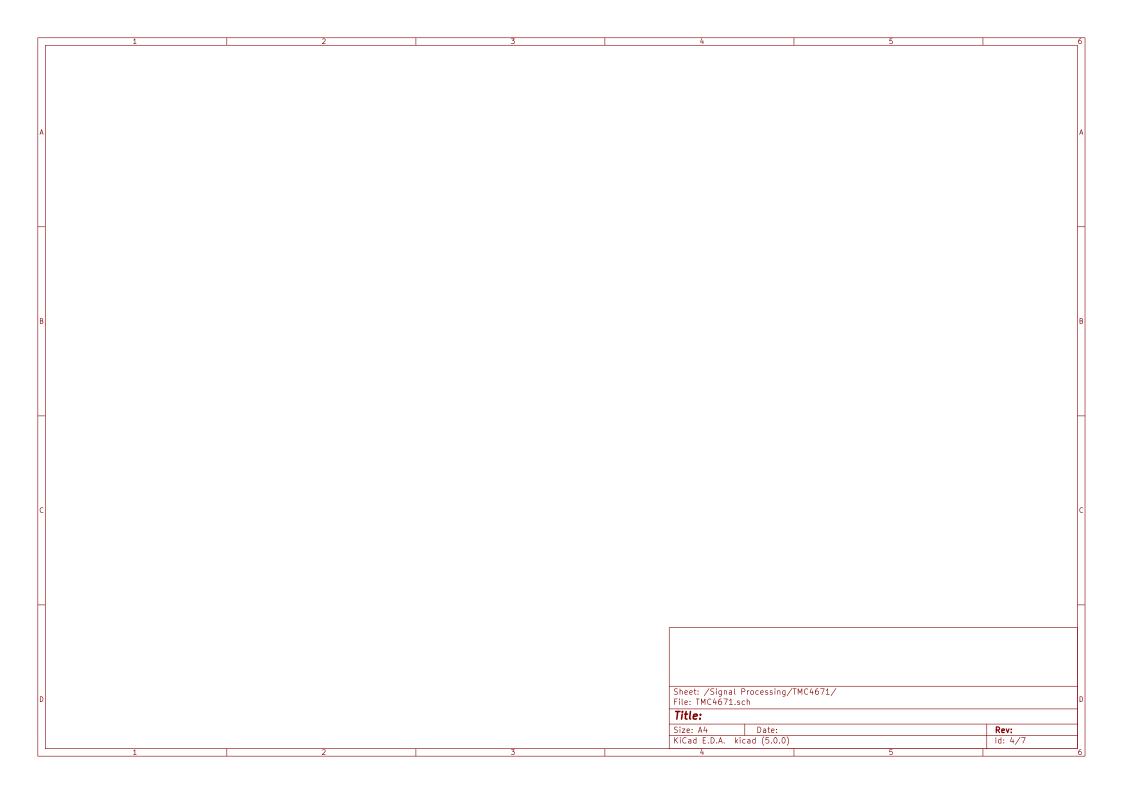

		7			
1			4	5	°
A					Α
					i i
				<b>₫</b> 5.0v	
				<b>₫</b> 3.6v	
				♦USB_D+	
				♦USB_D-	
				♦ CAN_H	
				♦ CAN_L	
$\vdash$				▶Throttle	<u> </u>
				▶MotorTemp	
				<b>D</b> Transistor	[emp
				DA_In1 DA_In2	
				DD_In1	
				<b>D</b> D_In2	
				DD_in3	
В				DD_in3	B
				□A_0ut1	
				<b>□</b> A_0ut2	
				□D_Out1 □D_Out2	
				<b>□</b> D_0ut2	
				□D_GND	
$\vdash$					H
c					lcl
					[1]
H					Н
					71
			Sheet: /Inputs/Outputs/ File: IO.sch		
D			File: IO sch		D
			T141_		
			Title:		
			Size: A4 Date: KiCad E.D.A. kicad (5.0.0)		Rev:
			KiCad F D A kicad (5 0 0)		Rev: Id: 6/7
	3	7	4 (3.0.0)	E	
1 1			1 4	1 3	1 0

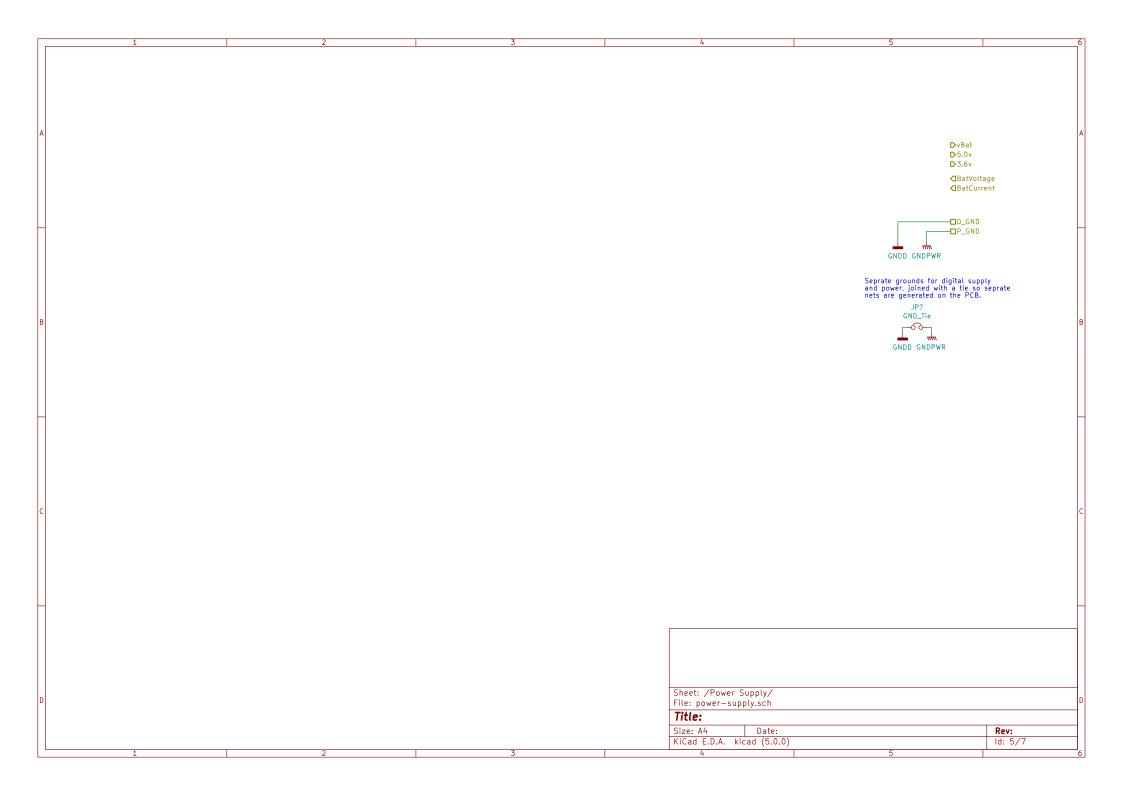