




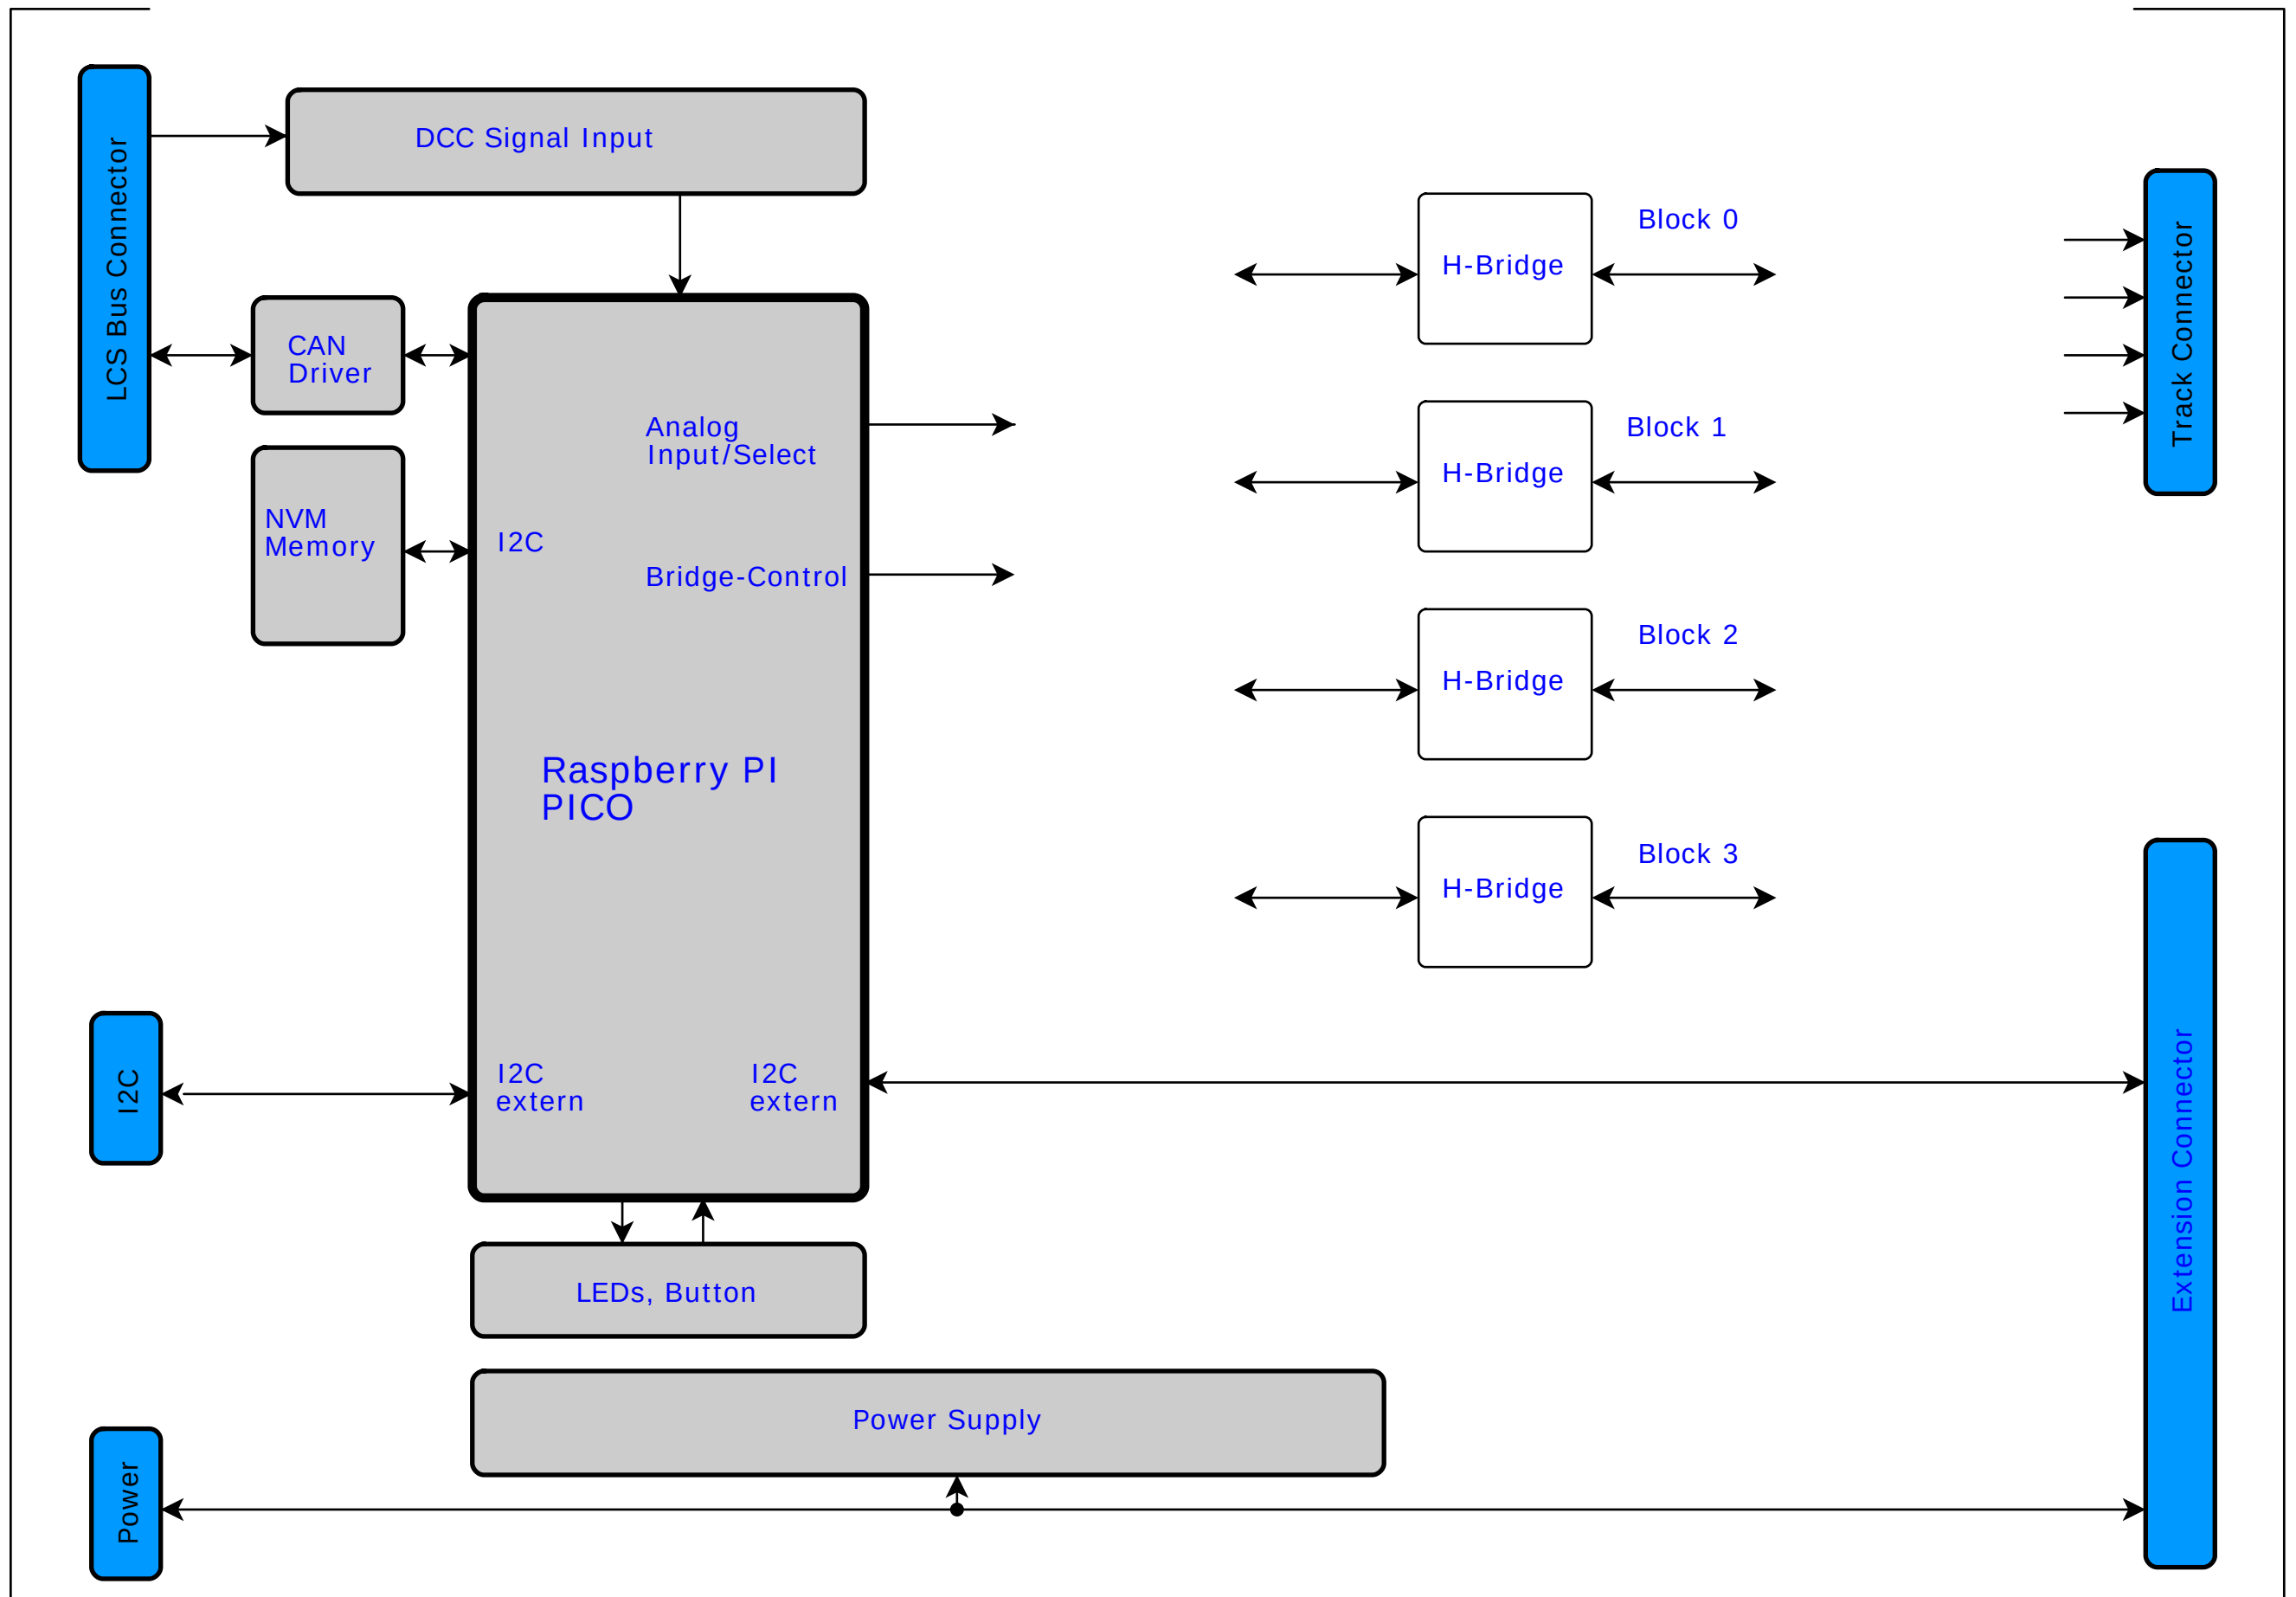


Main Controller - RASPBERRY Pi Pico

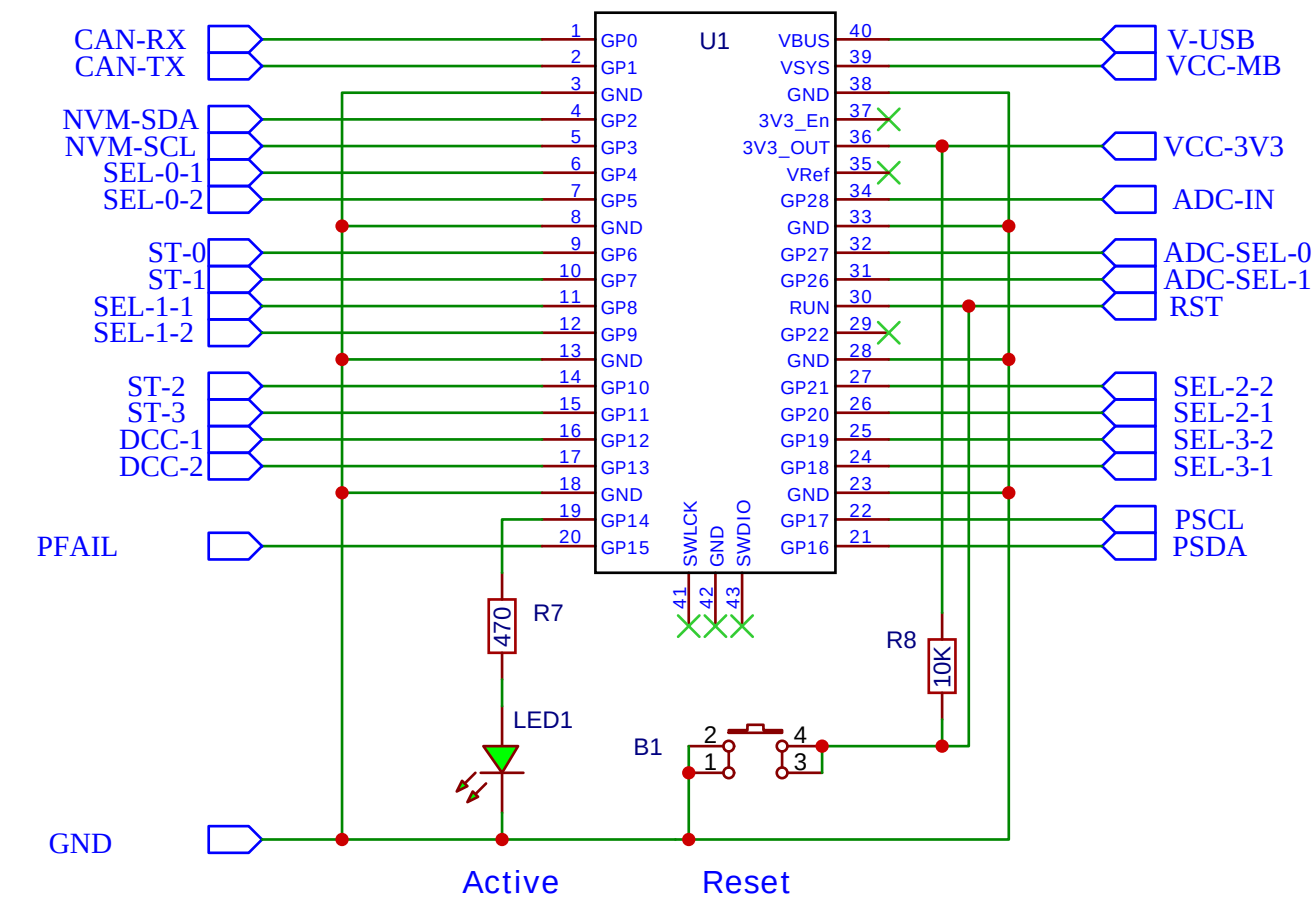


External I2C Driver

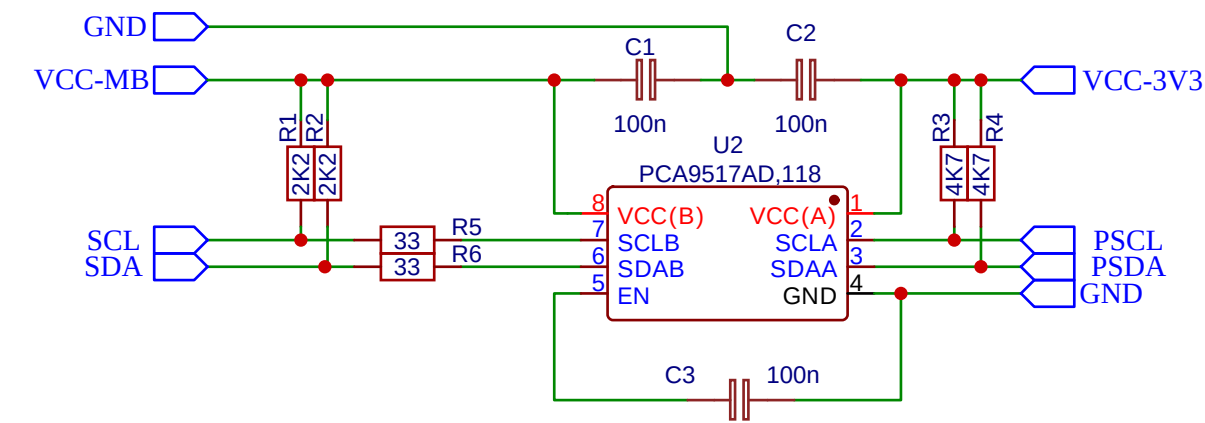


Non-Volatile Memory

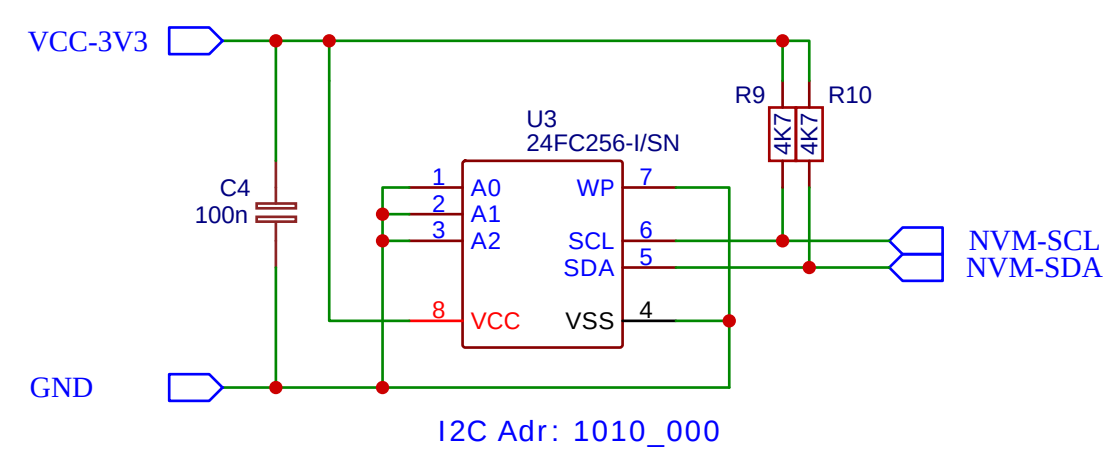

LCS Bus - DCC Signal Input

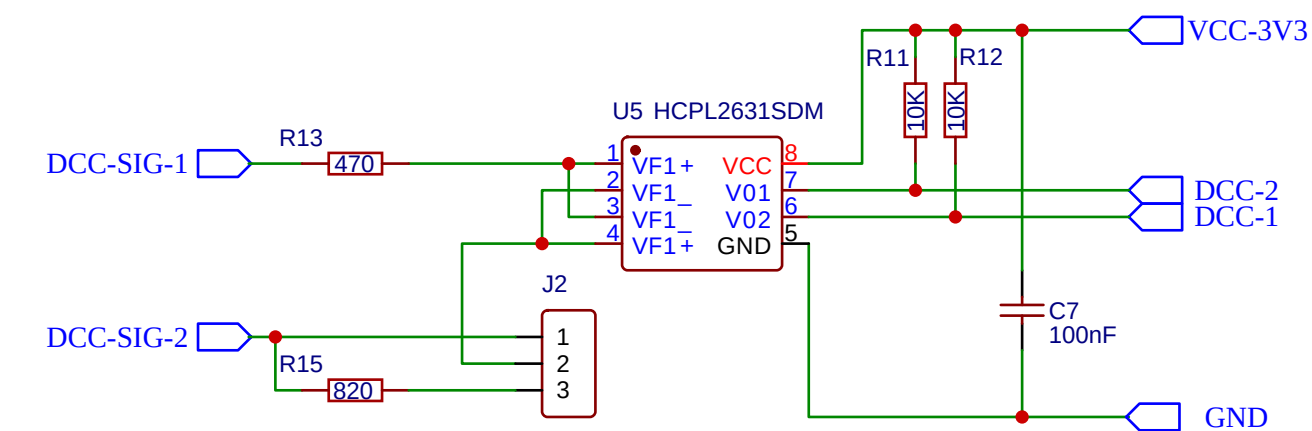

CAN Bus Line Driver

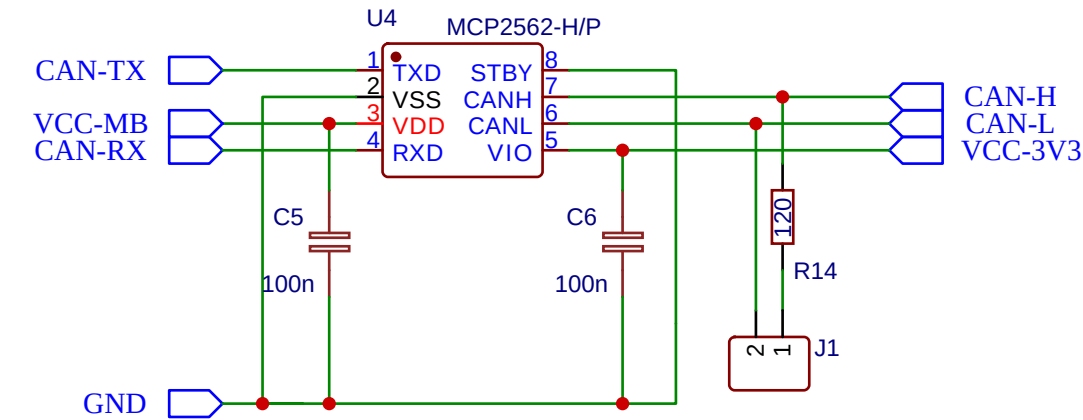


Control Logic Signals:


Sel-2	Sel-1	->	B-x-1	B-x-2	ENB-x	STATE
0	0	->	GND	GND	H	"CUT"
0	1	->	VS	GND	H	DCC/PWM-FWD
1	0	->	GND	VS	H	DCC/PWM-REV
1	1	->	VS	VS	L	"Z"

ENB == LOW -> Z

Enable control

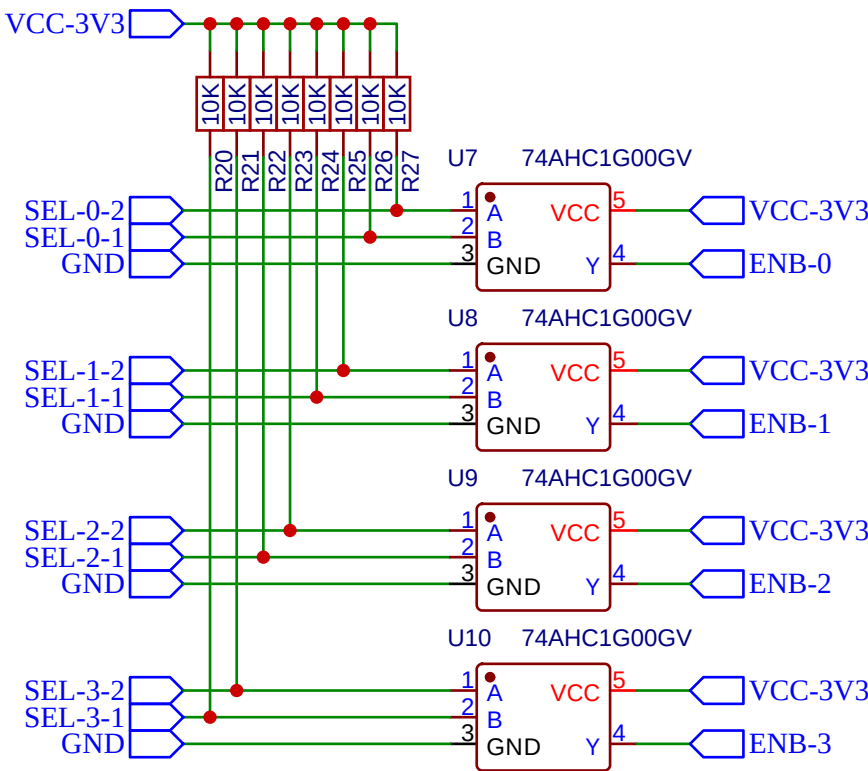


ADC-Multiplexer

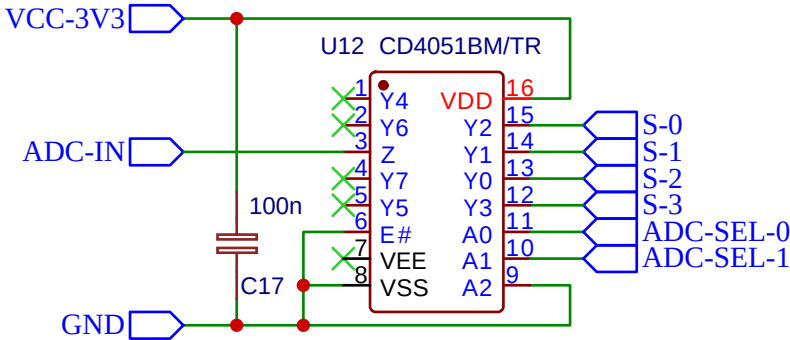


Control Logic Signals:

ADC-SEL-0	SEL-1	->
0	0	-> S2
0	1	-> S1
1	0	-> S0
1	1	-> S3


H-Bridges

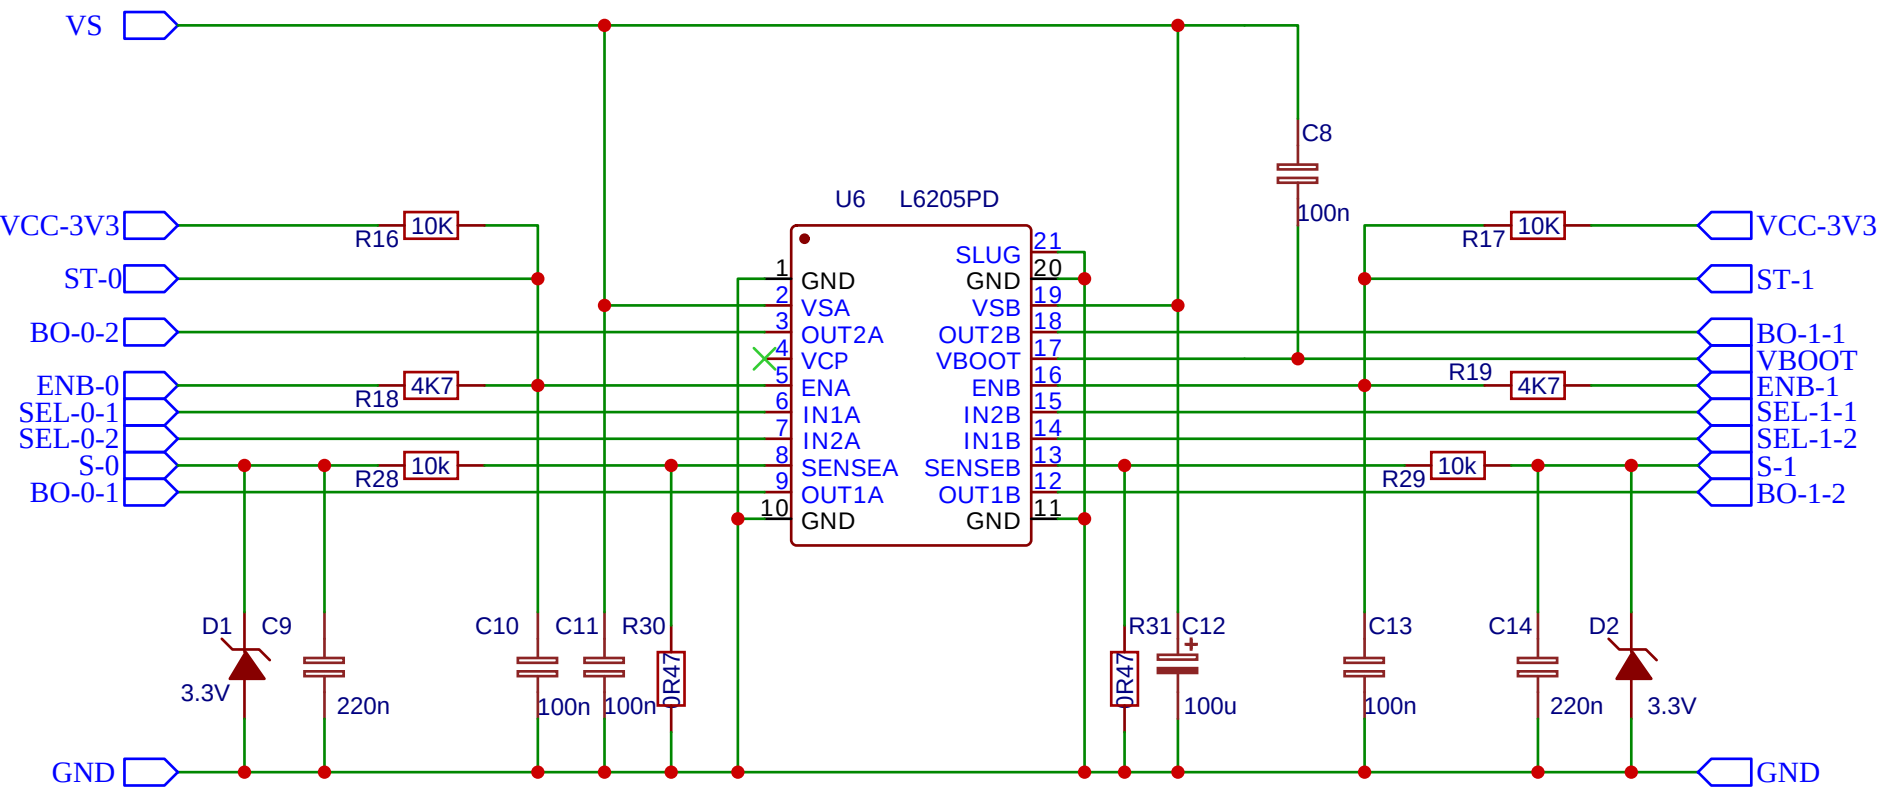

H-Bridges

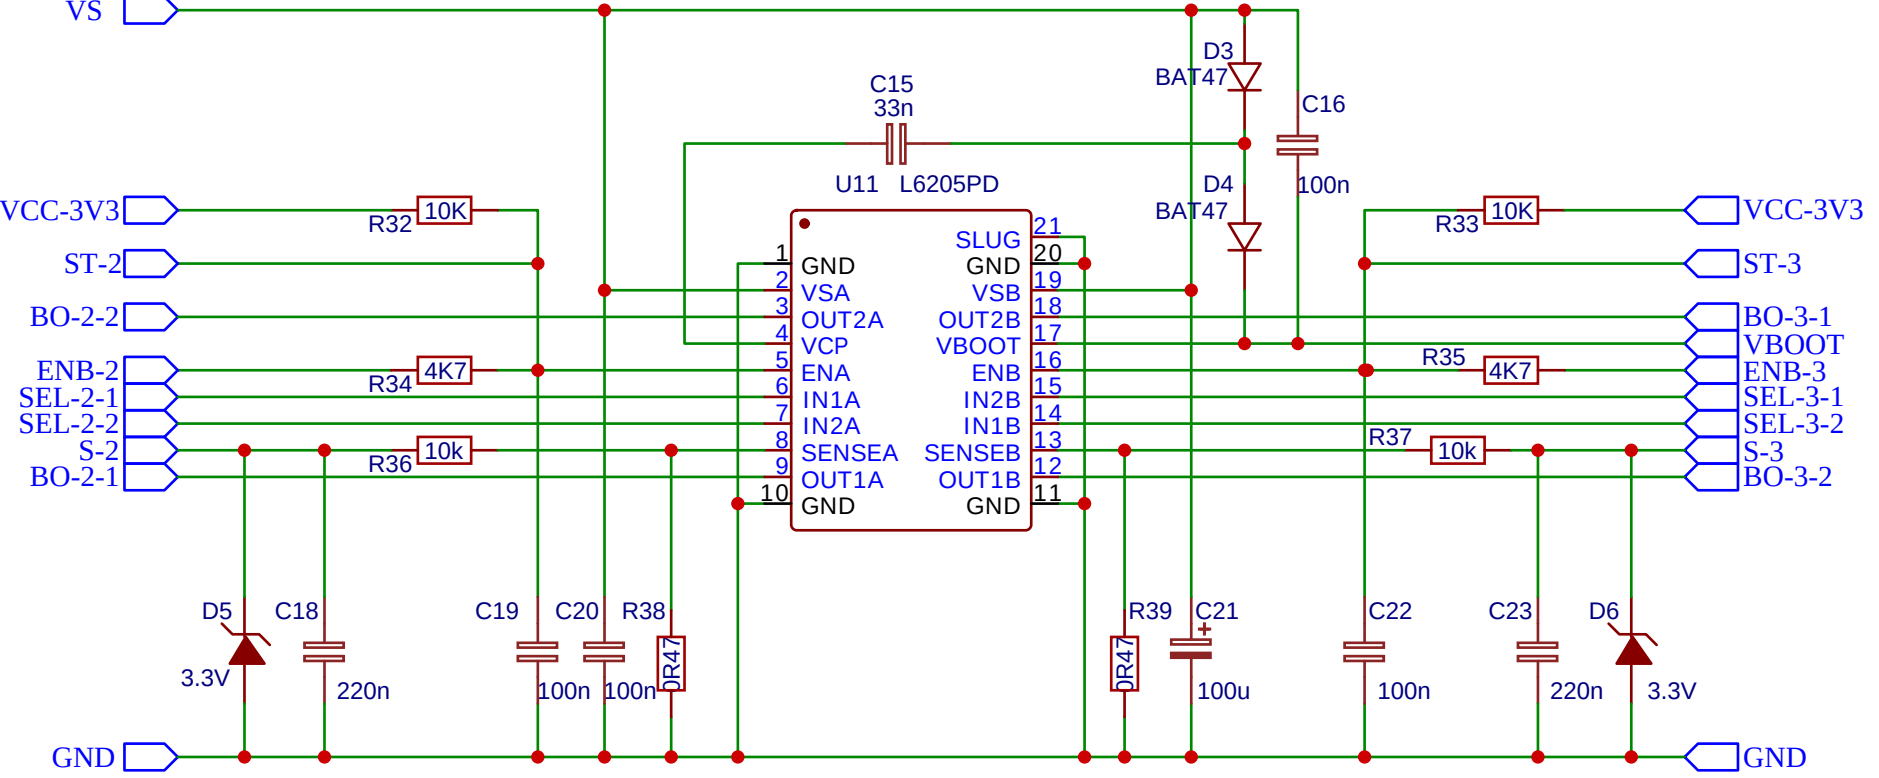

Block Controller PCB connectors

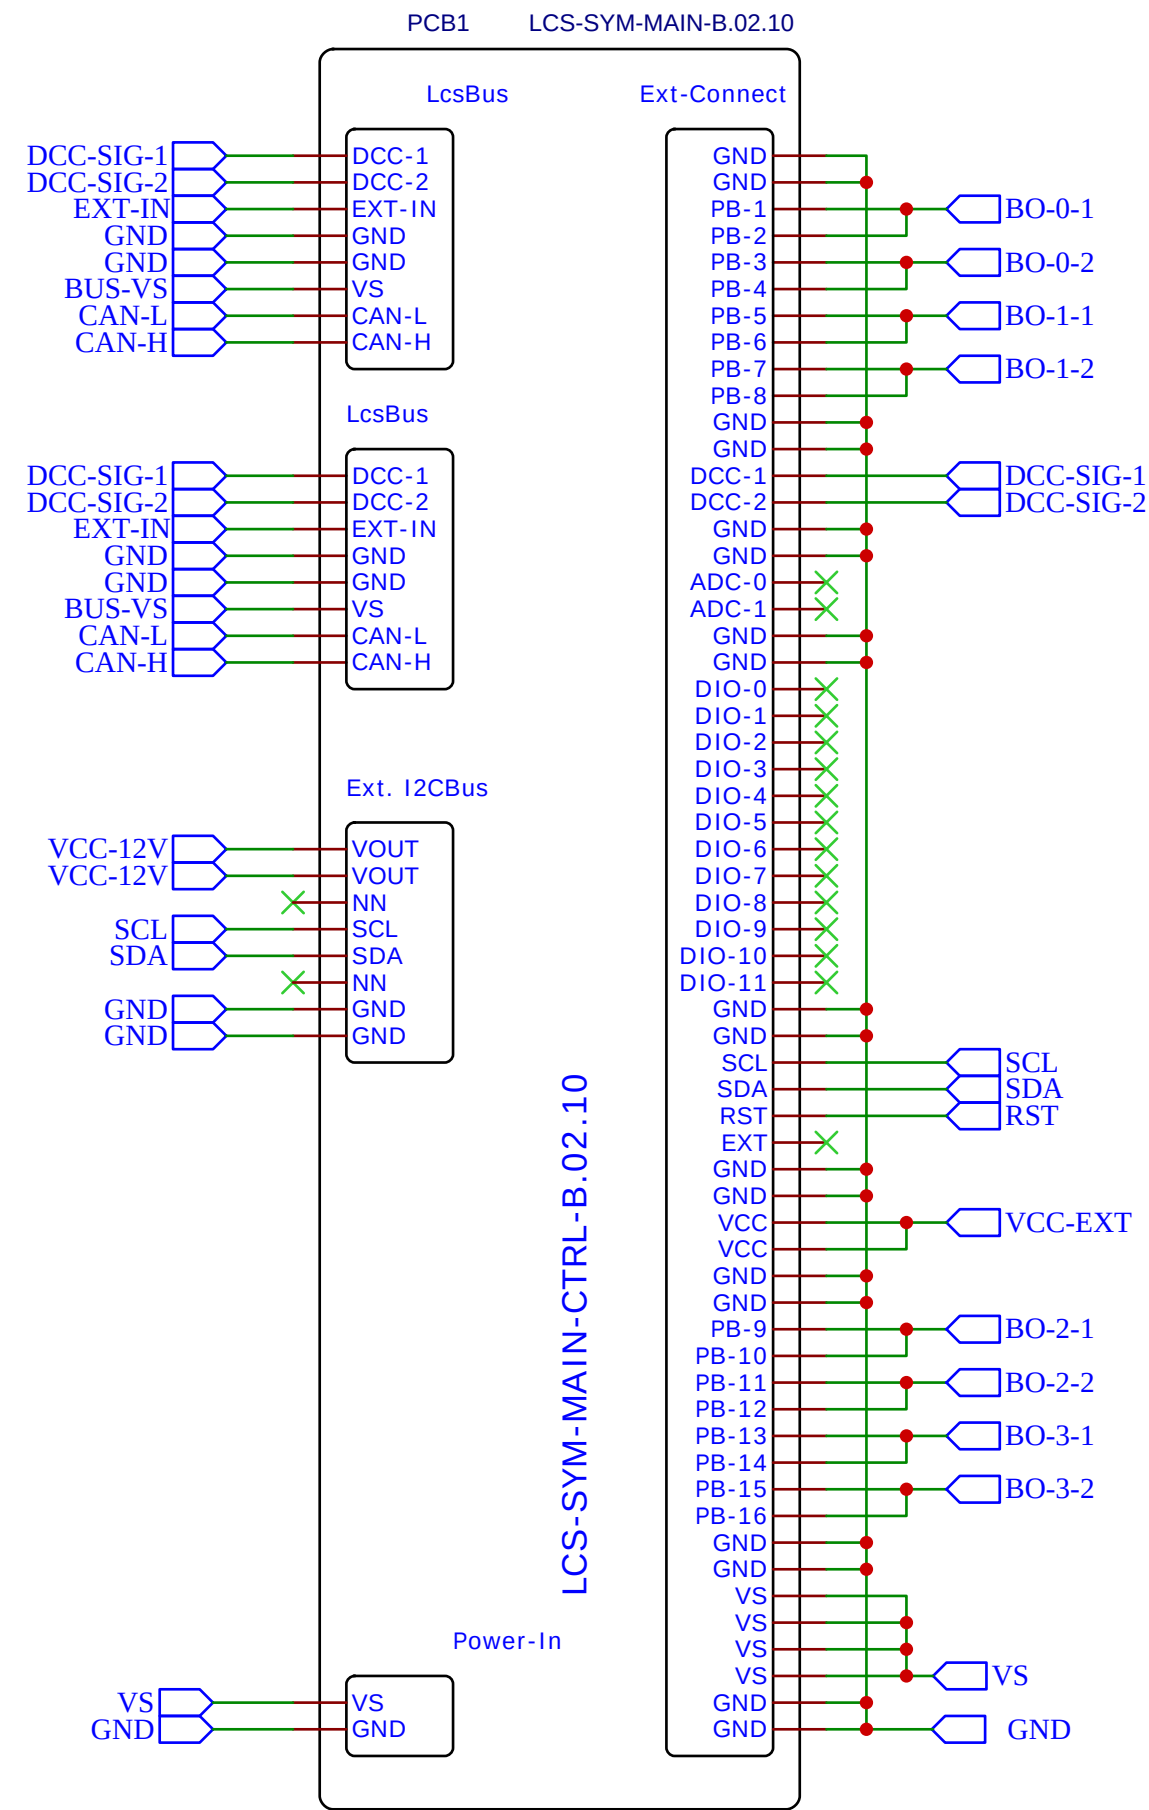

Power Supply with Powerfail Option

