

HIPPSC  
SHRINK FIT 希普思



五轴及深腔加工刀具  
Five-Axis And Deep Cavity Machining Tools




[www.hippsc.com](http://www.hippsc.com)

专注热装夹持系统  
We specialize in shrink fit holding tools system

# 热装机

## Shrink Fit Heating Machine

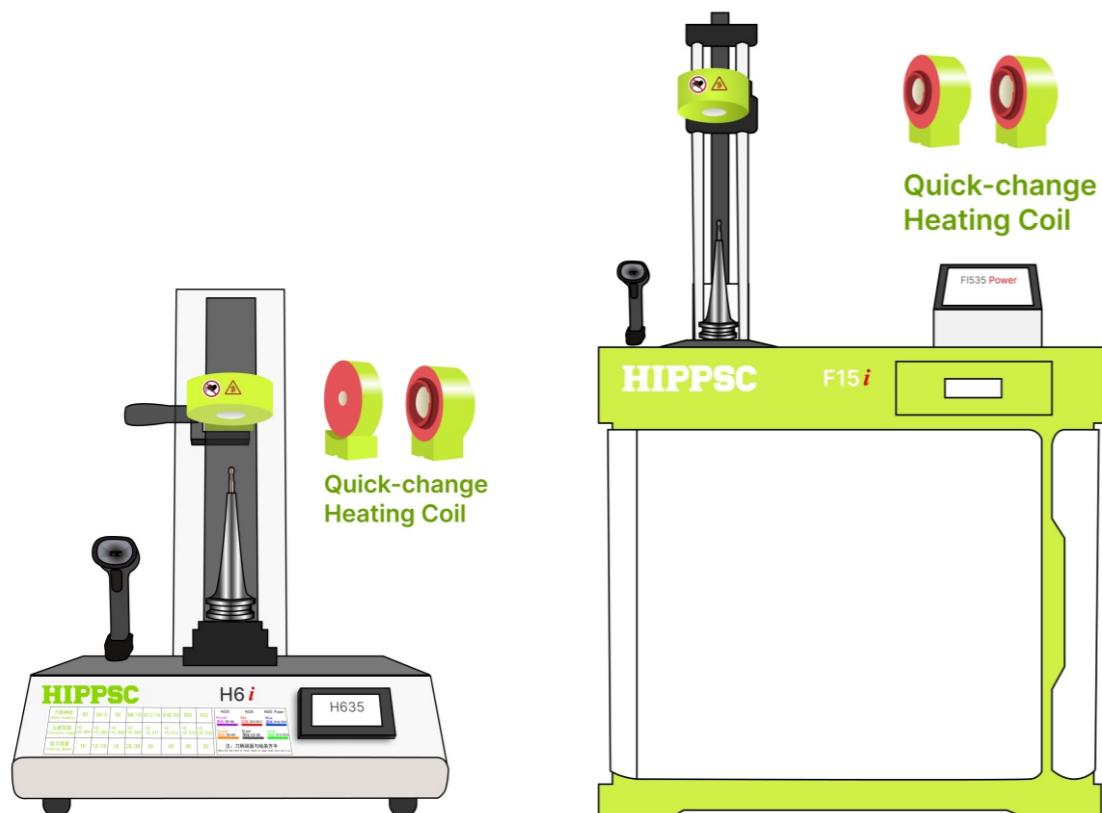

### • 主要特点 • Main features

- 扫码识别 Scan the code identification
- 快换线圈 Quick change coil
- 精准控温 Precise temperature control

# 目录 / CATALOGUE

热装机	P01-P06
Shrink Fit Machine	
●	
梦幻系列介绍	P07-P10
EXGRIP System Introduce	
●	
梦幻基础柄	P11-P20
Threaded Tool Holder	
●	
热装刀杆	P21-P22
Shrink Fit Extension	
●	
螺纹刀杆	P23
Threaded Tool Rod	
●	
变径杆	P24
Tool Bar With Adjustable Dia	
●	
梦幻锥度铣刀	P25-P26
EXGRIP Taper Milling Cutter	
●	
梦幻铣刀	P27-P32
EXGRIP Milling Cutter	
●	
钨钢可换头	P33-P38
Carbide End Milling Cutter	
●	
钨合金抗震系列介绍	P39-P42
Tungsten Alloy Anti-seismic System Introduce	
●	
钨合金抗震螺纹杆	P43-P48
Tungsten Alloy Anti-seismic Threaded Extension Holder	
●	
螺纹热装转换套(标准铣刀)	P49
Threaded Shrink Fit Standard Conversion Sleeve	
●	
螺纹热装转换套(梦幻铣刀)	P50
Threaded Shrink Fit "EXGRIP" Conversion Sleeve	
●	
钨合金抗震热装杆	P51-P53
Tungsten Alloy Anti-seismic Shrink Fit Extension Holder	
●	
抗震热装转换套(标准铣刀)	P54
Anti-seismic Shrink Fit basic Extension Holder	
●	
抗震热装转换套(梦幻铣刀)	P55
Anti-seismic Shrink Fit Conversion Sleeve	

## Shrink Fit Heating Machine

### 智能风冷热装机【扫码识别】

- 扫码识别,一键加热,避免人为过烧
- 快换线圈,智能感应切换系统
- 精准温控,线圈过温预警
- 加热范围:D3-D32 线圈内置加热精准定位线
- Scan the code identification, one-click heating, avoid artificial heating
- Quick change coil, intelligent induction switching system
- Precise temperature control, coil over-temperature warning
- Heating range: D3-D32, coil built-in heating precision positioning line



### 配件 Options

TYPE 类型	MODEL 型号	D 内径尺寸	HEATING RANGE 加热范围	PHOTO 产品图片
快换线圈 Quick change coil	K620 选配 Optional K655 Power 选配 Optional	20 55	D3-6 D12-32	
扫码枪 Barcode scanner	LK-81DPM-L 选配 Optional			
定位卡簧 Clamp spring	HP-K 选配 Optional	3/4/5/6/8/10/12/ 14/16/20/25/32		
拆刀钳 Plier	HP-LH7-N 选配 Optional			
隔热手套 Oven glove	HP-GT-N 选配 Optional			
隔热环 Insulation ring	HG55SR1216 选配 Optional HG55SR1825 选配 Optional HG55SR2532 选配 Optional		适用于厚壁型、强力型 Suitable for thick-wall type, power type	
转换套 Conversion sleeve	SH-BT30 SH-BT40 选配 Optional SH-HSK25 SH-HSK32 选配 Optional SH-HSK40 SH-HSK50 选配 Optional SH-HSK63 SH-CAT40/SK40 选配 Optional SH-ISO20 SH-ISO25 选配 Optional SH-ST32/25/20/26/12 选配 Optional SH-SK50/CAT50 选配 Optional SH-BT50/HSK100 标配 Standard			

### 技术数据 Technical data

Cat.No 机器型号	HEATING RANGE 加热范围	SIZE 尺寸	MAX D 刀柄最大外径	SUPPLY 电源	CURRENT 电流	WEIGHT 重量	INVENTORY 备货情况
H635	3-12mm	540x400x780mm	30mm	AC 220V	16A	25KG	● ▲ ☆

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

# Shrink Fit Heating Machine

## 全自动水冷热装机【扫码识别】

- 扫码识别，一键加热，避免人为过烧
- 快换线圈，智能感应切换系统
- 合金钢材、不锈钢材一机通烧
- 精准加热千次不发黑，有效减少积碳，保证夹持精度
- 有效延长刀柄使用寿命
- 可拆装高速钢刀具
- 2秒加热，15秒冷却
- Scan the code identification, one-click heating, avoid artificial heating
- Quick change coil, intelligent induction switching system
- Alloy steel and stainless steel are all heat in one machine
- Accurate heating for thousands of times without blackening, effectively reduce carbon deposition and ensure clamping accuracy
- Effectively prolong the service life of the chuck
- High speed steel tools can be applied
- Heating for 2 seconds and cooling for 15 seconds



### 配件 Options >>


TYPE 类型	MODEL 型号	D 内径尺寸	HEATING RANGE 加热范围	PHOTO 产品图片
快换线圈 Quick change coil	K1555 Power 选配 Optional K1568 Power 选配 Optional	55 68	D12-32 D25-32 强力型	
扫码枪 Barcode scanner	LK-81DPM-L 选配 Optional			
定位卡簧 Clamp spring	HP-K 选配 Optional	3/4/5/6/8/10/12/ 14/16/20/25/32		
拆刀钳 Plier	HP-LH7-N 选配 Optional			
隔热手套 Oven glove	HP-GT-N 选配 Optional			
转换套 Conversion sleeve	F15-BT50 标配 Standard F15-BT40/BT30 选配 Optional F15-HSK100/HSK63/HSK50/HSK40/HSK32 选配 Optional			
隔热环 Insulation ring	G35SR0306 标配 Standard G35SR0812 标配 Standard G55SR1216 选配 Optional G55SR1825 选配 Optional G55SR2532 选配 Optional G68SRC2532 选配 Optional		适用于厚壁型、强力型 Suitable for thick-wall type, power type	
线圈限位器 Coil stopper	F15-R060 选配 Optional		适用于薄壁型、不锈钢材质 Suitable for thin-walled, stainless steel material	
冷却液 Cooling liquid	F15-LQY-1L 标配 Standard			

### 技术数据 Technical data >>

Cat.No 机器型号	HEATING RANGE 加热范围	SIZE 尺寸	MAX D 刀柄最大外径	SUPPLY 电源	CURRENT 电流	WEIGHT 重量	INVENTORY 备货情况
F1535	3-12mm	950x710x1600mm	30mm	AC 380V	32A	155KG	● ▲ ☆

注：●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

# 梦幻系列 EXGRIP System

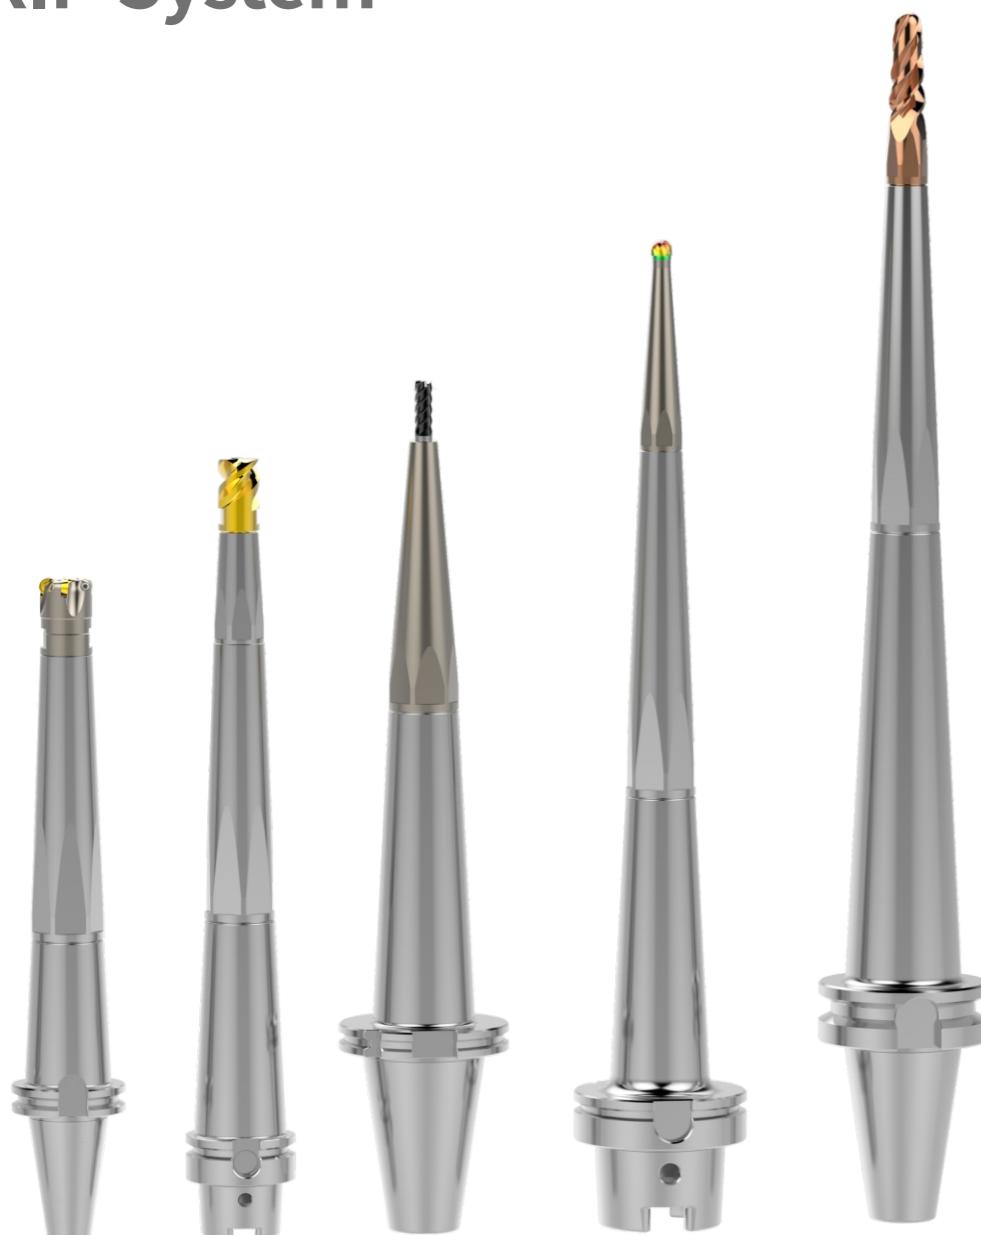

## • 主要特点 • Main features


- >> ● 稳定性 Stability
- 灵活性 Flexibility
- 模块化 Modularity
- 低成本 Low cost

## 目录 / CATALOGUE

热装机 Shrink Fit Machine	P01-P06
梦幻系列介绍 EXGRIP System Introduce	P07-P10
梦幻基础柄 Threaded Tool Holder	P11-P20
热装刀杆 Shrink Fit Extension	P21-P22
螺纹刀杆 Threaded Tool Rod	P23
变径杆 Tool Bar With Adjustable Dia	P24
梦幻锥度铣刀 EXGRIP Taper Milling Cutter	P25-P26
梦幻铣刀 EXGRIP Milling Cutter	P27-P32
钨钢可换头 Carbide End Milling Cutter	P33-P38
钨合金抗震系列介绍 Tungsten Alloy Anti-seismic System Introduce	P39-P42
钨合金抗震螺纹杆 Tungsten Alloy Anti-seismic Threaded Extension Holder	P43-P48
螺纹热装转换套(标准铣刀) Threaded Shrink Fit Standard Conversion Sleeve	P49
螺纹热装转换套(梦幻铣刀) Threaded Shrink Fit "EXGRIP" Conversion Sleeve	P50
钨合金抗震热装杆 Tungsten Alloy Anti-seismic Shrink Fit Extension Holder	P51-P53
抗震热装转换套(标准铣刀) Anti-seismic Shrink Fit basic Extension Holder	P54
抗震热装转换套(梦幻铣刀) Anti-seismic Shrink Fit Conversion Sleeve	P55

## 梦幻系列示意图

Illustration For EXGRIP Series

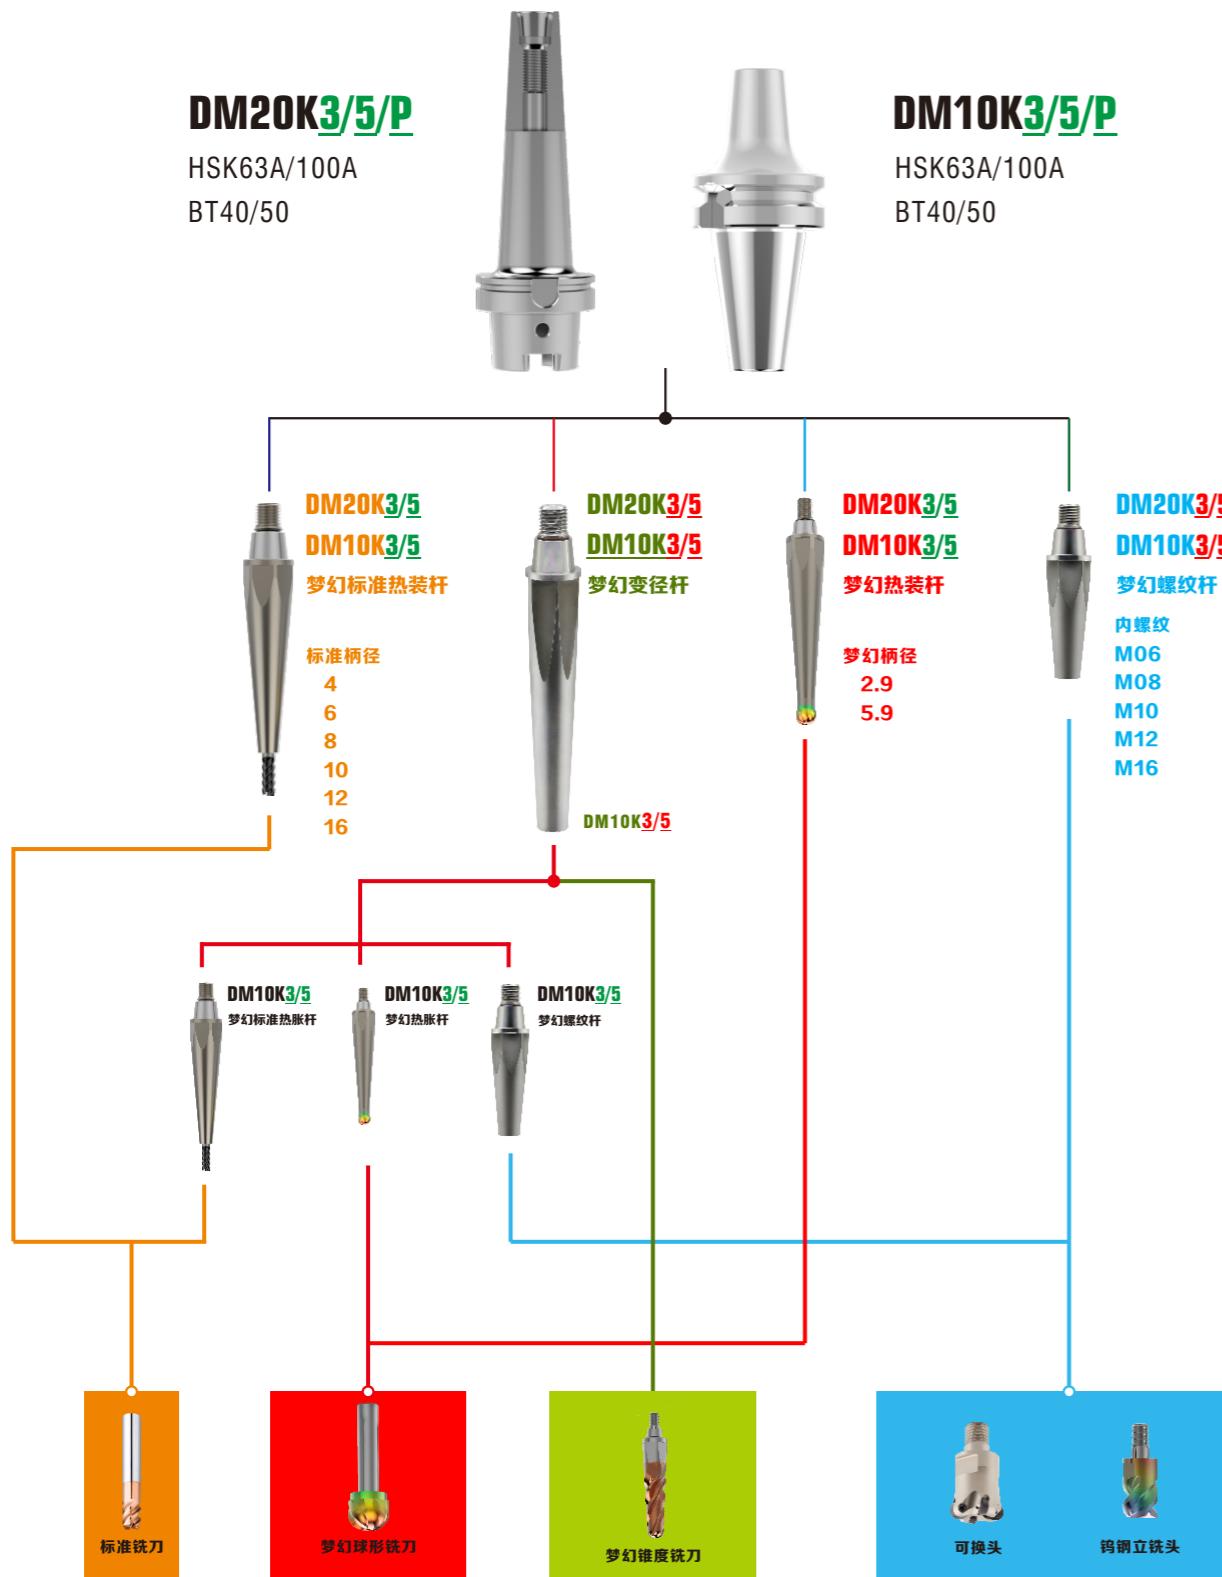


## 梦幻系列产品优势

EXGRIP Die Benefits Are Obvious

## 稳定性 Stability

如同笔芯装笔套一样，提供稳定的夹紧力，能够获得更好的切削参数，同时减少加工时间和提高加工品质。

Just like a pen cartridge put in a pen cover, it provides stable clamping force, which can obtain better cutting parameters, while reducing processing time and improving processing quality

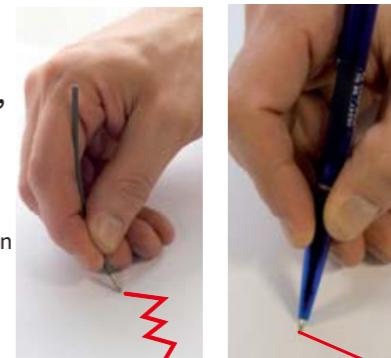

## 灵活性 Flexibility


丰富的快换式夹紧装置，能够快速地帮助你完成不同的切削任务。通过梦幻连接部件，能够满足不同工件的加工需求。

Rich quick-change clamping devices, which can quickly help you to complete different cutting tasks. By EXGRIP connecting parts, it can meet the processing needs of different work pieces

## 模块化 Modularity

梦幻系列刀具采用模块化结构，整个系列刀具可以应用到各种形式的主轴，并通过多种组合方式完成你的切削任务。

EXGRIP series of tools use modular structure, the whole series of tools can be applied to various forms of spindle, and through a variety of combinations way to complete your cutting task

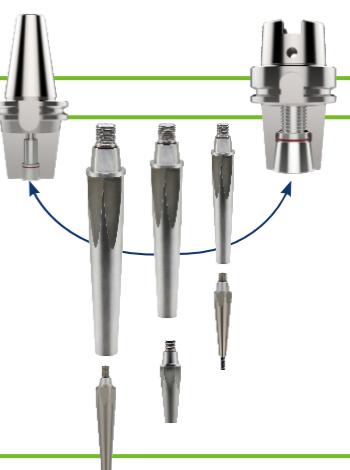

## 低成本 Low cost

我们带来的资源节约效果明显，拥有梦幻系列刀具后，我们无需再根据不同的加工工件而单独购买不同的刀具，节省不同类型的刀具成本，从而降低刀具成本。

The resource saving effect we bring is obvious. After owning the EXGRIP series of tools, we don't need to buy different tool according to different processing workpieces, saving the cost of different types of tools, so as to reduce the tools cost

## 命名规则 Naming Rule

**BBT** 40 - **DM** 20 **K3** - **90**

主轴形式  
Spindle form

主轴大小  
Spindle size

连接方式  
Interface mode

接口大小  
Interface size

倾斜角度  
Lean angle

基准面长度  
Length

- K3**  
倾斜3°
- K5**  
倾斜5°
- KP**  
增强型  
Curved model

**DM** 10 **K3** - **SRD** 03 - **160**

连接方式  
Interface mode

接口大小  
Interface size

倾斜角度  
Lean angle

刀柄壁厚  
Wall thick

夹持直径  
Clamping diameter

基准面长度  
Length

- SRD**  
梦幻热装  
EXGRIP
- SRS**  
薄壁热装  
Thin-walled
- SR**  
厚壁热装  
Thick-walled

**DM** 10 **K3** - **M08** - **160**

连接方式  
Interface mode

接口大小  
Interface size

倾斜角度  
Lean angle

螺纹大小  
Thread size

基准面长度  
Length

**DM** 20 **K3** - **DM** 20 **K3** - **160**

连接方式  
Interface mode

接口大小  
Interface size

倾斜角度  
Lean angle

连接方式  
Interface mode

接口大小  
Interface size

倾斜角度  
Lean angle

基准面长度  
Length

## 命名规则 Naming Rule

**EX** **B** **N** 2 - **06** **030** - **04**

连接方式  
Interface mode

刃具形式  
Edge type

加工材质  
Workpiece material

刃数  
Edges No.

刃径  
Edge Dia.

R角  
R angle

有效刃长  
Edge length

<b>B</b> 球形铣刀 Spherical milling cutter	<b>N</b> 铝 Aluminum
<b>R</b> 圆鼻铣刀 Round nose milling cutter	<b>K</b> 模具钢 Steel
	<b>M</b> 钛合金 Titanium Alloy
	<b>H</b> 淬火钢 Hardened Steel

**SC** **R** **N** - **3** **12** **05** - **M06**

可换头系列  
Exchangeable  
Milling Heads

刃具形式  
Edge type

加工材质  
Workpiece  
material

刃数  
Edges No.

刃径  
Edge Dia.


R角  
R angle

螺纹大小  
Thread size

<b>T</b> 平底铣刀 Flat Bottom milling cutter	<b>N</b> 铝 Aluminum
<b>B</b> 球形铣刀 Spherical milling cutter	<b>K</b> 模具钢 Steel
<b>R</b> 圆鼻铣刀 Round nose milling cutter	<b>M</b> 钛合金 Titanium Alloy
	<b>H</b> 淬火钢 Hardened Steel

**BT40-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

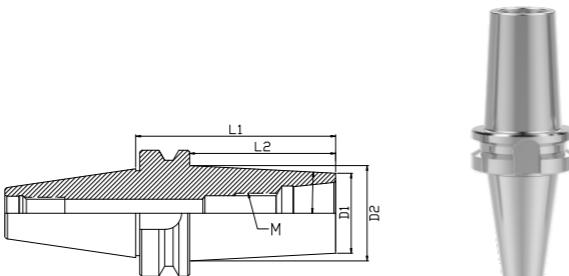
▶ 技术数据 Technical data ➤ **K3**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
BT40-DM10K3-40	40	13	24	25.36	M10	3°	● ▲ ★
BT40-DM10K3-77	77	50	24	29.24	M10	3°	● ▲ ★
BT40-DM10K3-100	100	73	24	31.65	M10	3°	● ▲ ★
BT40-DM20K3-40	40	13	40	41.36	M20	3°	● ▲ ★
BT40-DM20K3-77	77	50	40	45.24	M20	3°	● ▲ ★
BT40-DM20K3-100	100	73	40	47.65	M20	3°	● ▲ ★
BT40-DM20K3-150	150	123	40	52.89	M20	3°	● ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days


**BT40-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

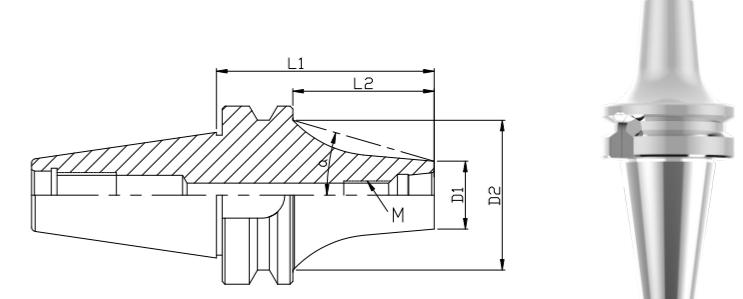▶ 技术数据 Technical data ➤ **KP**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
BT40-DM10KP-77	77	50	24	53	M10	16.17 °	● ▲ ★
BT40-DM10KP-100	100	73	24	53	M10	11.23 °	● ▲ ★
BT40-DM20KP-77	77	50	40	53	M20	7.41 °	● ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

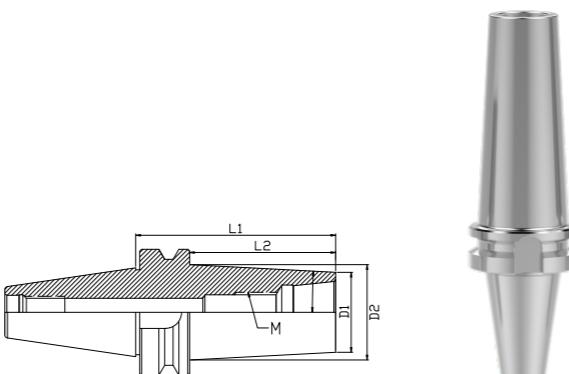
▶ 技术数据 Technical data ➤ **K5**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
BT40-DM10K5-40	40	13	24	26.27	M10	5°	● ▲ ★
BT40-DM10K5-77	77	50	24	32.75	M10	5°	● ▲ ★
BT40-DM10K5-100	100	73	24	36.77	M10	5°	● ▲ ★
BT40-DM20K5-40	40	13	40	42.27	M20	5°	● ▲ ★
BT40-DM20K5-77	77	50	40	48.75	M20	5°	● ▲ ★
BT40-DM20K5-100	100	73	40	48.75	M20	5°	● ▲ ★
BT40-DM20K5-150	150	123	40	52.77	M20	5°	● ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**HSK63A-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

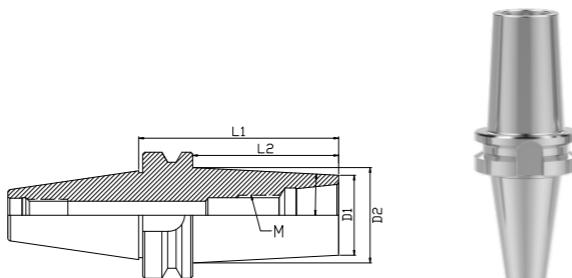
▶ 技术数据 Technical data ➤ **K3**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
HSK63A-DM10K3-76	76	50	24	29.24	M10	3°	● ▲ ★
HSK63A-DM10K3-100	100	74	24	31.76	M10	3°	● ▲ ★
HSK63A-DM20K3-76	76	50	40	45.24	M20	3°	● ▲ ★
HSK63A-DM20K3-100	100	74	40	47.76	M20	3°	● ▲ ★
HSK63A-DM20K3-150	150	124	40	53	M20	3°	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days


**HSK63A-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

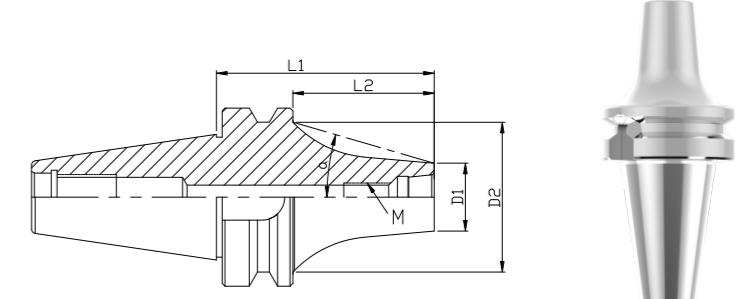▶ 技术数据 Technical data ➤ **KP**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
HSK63A-DM10KP-76	76	50	24	53	M10	16.17 °	● ▲ ★
HSK63A-DM10KP-100	100	74	24	53	M10	11.09 °	● ▲ ★
HSK63A-DM20KP-76	76	50	40	53	M20	7.41 °	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

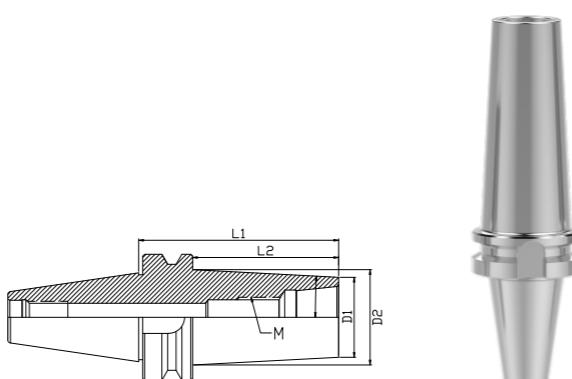
▶ 技术数据 Technical data ➤ **K5**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
HSK63A-DM10K5-76	76	50	24	32.75	M10	5°	● ▲ ★
HSK63A-DM10K5-100	100	74	24	36.95	M10	5°	● ▲ ★
HSK63A-DM20K5-76	76	50	40	48.75	M20	5°	● ▲ ★
HSK63A-DM20K5-100	100	74	40	52.95	M20	5°	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**BT50-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

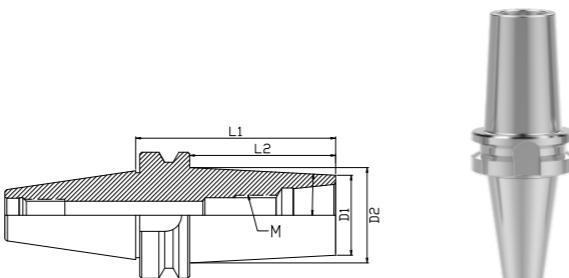
▶ 技术数据 Technical data ➤ **K3**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
BT50-DM10K3-88	88	50	24	29.24	M10	3°	● ▲ ★
BT50-DM10K3-150	150	112	24	35.74	M10	3°	● ▲ ★
BT50-DM20K3-88	88	50	40	45.24	M20	3°	● ▲ ★
BT50-DM20K3-150	150	112	40	51.74	M20	3°	● ▲ ★
BT50-DM20K3-200	200	162	40	56.98	M20	3°	● ▲ ★
BT50-DM20K3-250	250	212	40	62.22	M20	3°	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days


**BT50-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

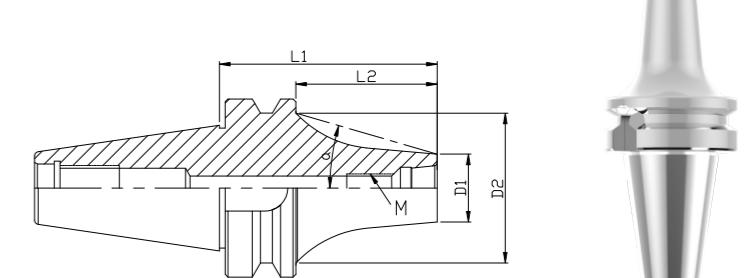▶ 技术数据 Technical data ➤ **KP**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
BT50-DM10KP-88	88	50	24	85	M10	31.38 °	● ▲ ★
BT50-DM10KP-150	150	112	24	85	M10	15.23 °	● ▲ ★
BT50-DM20KP-88	88	50	40	85	M20	24.23 °	● ▲ ★
BT50-DM20KP-150	150	112	40	85	M20	11.36 °	● ▲ ★
BT50-DM20KP-200	200	162	40	85	M20	7.91 °	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

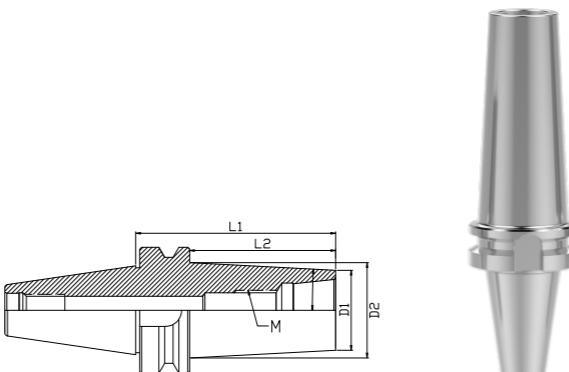
▶ 技术数据 Technical data ➤ **K5**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
BT50-DM10K5-88	88	50	24	32.75	M10	5°	● ▲ ★
BT50-DM10K5-150	150	112	24	43.6	M10	5°	● ▲ ★
BT50-DM20K5-88	88	50	40	48.75	M20	5°	● ▲ ★
BT50-DM20K5-150	150	112	40	59.6	M20	5°	● ▲ ★
BT50-DM20K5-200	200	162	40	68.35	M20	5°	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**HSK100A-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

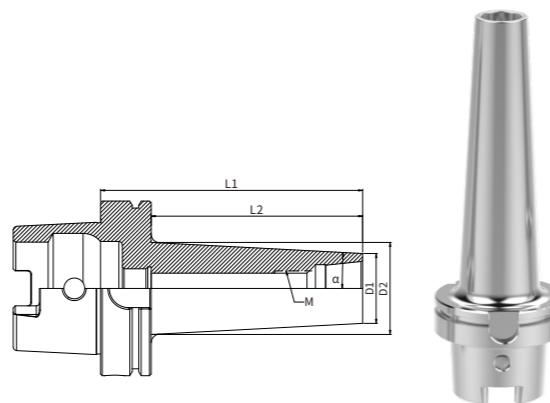
▶ 技术数据 Technical data ➤ **K3**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
HSK100A-DM10K3-79	79	50	24	29.24	M10	3°	● ○ ▲ ★
HSK100A-DM10K3-150	150	121	24	36.68	M10	3°	○ ○ ▲ ★
HSK100A-DM20K3-79	79	50	40	45.24	M20	3°	● ○ ▲ ★
HSK100A-DM20K3-150	150	121	40	52.68	M20	3°	● ○ ▲ ★
HSK100A-DM20K3-200	200	171	40	57.92	M20	3°	● ○ ▲ ★
HSK100A-DM20K3-250	250	221	40	63.16	M20	3°	● ○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days


**HSK100A-DM**

梦幻基础柄 EXGRIP Basic Threaded Tool Holder

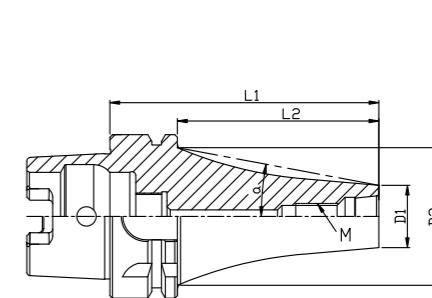▶ 技术数据 Technical data ➤ **KP**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
HSK100A-DM10KP-79	79	50	24	85	M10	31.38 °	○ △ ★
HSK100A-DM10KP-150	150	121	24	85	M10	14.15 °	○ △ ★
HSK100A-DM20KP-79	79	50	40	85	M20	24.23 °	○ △ ★
HSK100A-DM20KP-150	150	121	40	85	M20	10.53 °	○ △ ★
HSK100A-DM20KP-200	200	171	40	85	M20	7.5 °	○ △ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

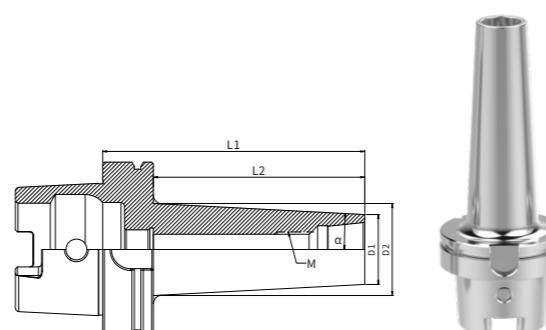
▶ 技术数据 Technical data ➤ **K5**

Cat.No 产品型号	L1	L2	D1	D2	M	α	INVENTORY 备货情况
HSK100A-DM10K5-79	79	50	24	32.75	M10	5°	○ ○ ▲ ★
HSK100A-DM10K5-150	150	121	24	45.17	M10	5°	○ ○ ▲ ★
HSK100A-DM20K5-79	79	50	40	48.75	M20	5°	○ ○ ▲ ★
HSK100A-DM20K5-150	150	121	40	61.17	M20	5°	○ ○ ▲ ★
HSK100A-DM20K5-200	200	171	40	69.93	M20	5°	○ ○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

## DM-SR/SRS

梦幻标准热装延长杆 EXGRIP Shrink Fit Extension

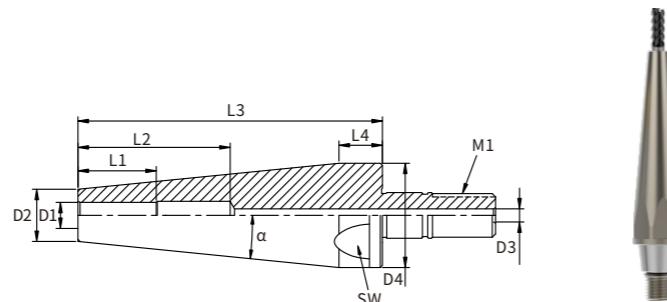

## 技术数据 Technical data ➤ K3

Cat.No 产品型号	SW	D1	D2	D3	D4	L1	L2	L3	L4	M	$\alpha$	INVENTORY 备货情况
DM10K3-SRS04-140	22	4	10	3	24	12	20	140	10	M10	3.08°	● ▲ ★
DM10K3-SRS06-125	22	6	12	3	24	18	36	125	10	M10	2.99°	● ▲ ★
DM10K3-SRS08-105	22	8	14	3	24	24	36	105	10	M10	3.01°	● ▲ ★
DM10K3-SRS10-90	22	10	16	5	24	30	42	90	10	M10	2.86°	● ▲ ★
DM20K3-SRS10-245	36	10	16	5	40	30	42	245	15	M20	2.99°	● ▲ ★
DM20K3-SR12-205	36	12	20	5	40	30	47	205	15	M20	3.01°	● ▲ ★
DM20K3-SR16-150	36	16	26	5	40	32	50	150	15	M20	2.97°	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days


## 技术数据 Technical data ➤ K5

Cat.No 产品型号	SW	D1	D2	D3	D4	L1	L2	L3	L4	M	$\alpha$	INVENTORY 备货情况
DM10K5-SRS04-90	22	4	10	3	24	12	20	90	10	M10	5.00°	● ▲ ★
DM10K5-SRS06-90	22	6	12	3	24	18	36	90	10	M10	4.29°	● ▲ ★
DM10K5-SRS08-90	22	8	14	3	24	24	36	90	10	M10	3.58°	● ▲ ★
DM20K5-SRS04-185	36	4	10	5	40	12	20	185	15	M20	5.04°	● ▲ ★
DM20K5-SRS06-175	36	6	12	5	40	18	36	175	15	M20	5.00°	● ▲ ★
DM20K5-SRS08-165	36	8	14	5	40	24	36	165	15	M20	4.95°	● ▲ ★
DM20K5-SRS10-155	36	10	16	5	40	30	42	155	15	M20	4.90°	● ▲ ★
DM20K5-SR12-130	36	12	20	5	40	30	47	130	15	M20	4.97°	● ▲ ★
DM20K5-SR16-95	36	16	26	5	40	32	50	95	15	M20	5.00°	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

## DM-SRD

梦幻热装延长杆 EXGRIP Shrink Fit Extension

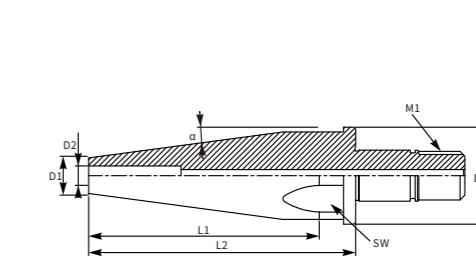

## 技术数据 Technical data ➤ K3

Cat.No 产品型号	SW	D1	D2	D3	L1	L2	M	$\alpha$	INVENTORY 备货情况
DM10K3-SRD06-190	22	5.5	12.9	24	180	190	M10	3°	○ ▲ ★
DM10K3-SRD08-170	22	7.7	5.9	24	160	170	M10	3°	○ ▲ ★
DM10K3-SRD10-160	22	9.5	5.9	24	150	160	M10	3°	○ ▲ ★
DM10K3-SRD12-160	22	11.5	5.9	24	150	160	M10	3°	○ ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days


## 技术数据 Technical data ➤ K5

Cat.No 产品型号	SW	D1	D2	D3	L1	L2	M	$\alpha$	INVENTORY 备货情况
DM10K5-SRD04-160	22	3.7	2.9	24	150	160	M10	4°	○ ▲ ★
DM10K5-SRD05-160	22	4.7	2.9	24	150	160	M10	4°	○ ▲ ★
DM10K5-SRD06-160	22	5.5	2.9	24	150	160	M10	4°	○ ▲ ★
DM10K5-SRD08-110	22	7.7	5.9	24	100	110	M10	5°	○ ▲ ★
DM10K5-SRD08-160	22	7.7	5.9	24	150	160	M10	4°	○ ▲ ★
DM10K5-SRD10-110	22	9.5	5.9	24	100	110	M10	5°	○ ▲ ★
DM10K5-SRD12-110	22	11.5	5.9	24	100	110	M10	4°	○ ▲ ★
DM20K5-SRD08-210	36	7.7	5.9	40	200	210	M20	5°	○ ▲ ★
DM20K5-SRD08-260	36	7.7	5.9	40	250	260	M20	4°	○ ▲ ★
DM20K5-SRD10-210	36	9.5	5.9	40	200	210	M20	5°	○ ▲ ★
DM20K5-SRD10-260	36	9.5	5.9	40	250	260	M20	4°	○ ▲ ★
DM20K5-SRD12-210	36	11.5	5.9	40	200	210	M20	5°	○ ▲ ★
DM20K5-SRD12-260	36	11.5	5.9	40	250	260	M20	4°	○ ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**DM-M**

梦幻螺纹连接杆 EXGRIP Threaded Tool Rod

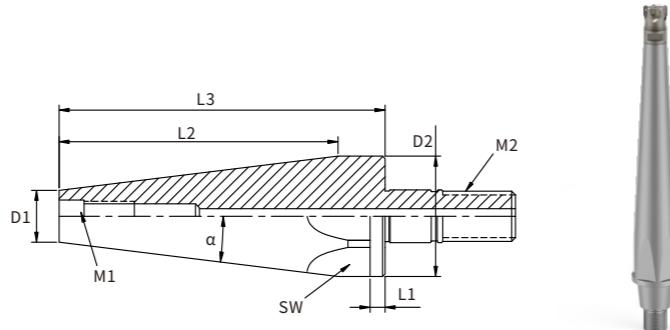

▶ 技术数据 Technical data ➤ K3

Cat.No 产品型号	SW	D1	D2	L1	L2	L3	M1	M2	α	INVENTORY 备货情况
DM10K3-M06-125	22	11.6	24	3	115	125	M06	M10	3°	● ▲ ★
DM10K3-M08-90	22	15.4	24	3	80	90	M08	M10	3°	● ▲ ★
DM10K3-M10-55	22	19	24	3	45	55	M10	M10	3°	● ▲ ★
DM20K3-M08-250	36	15.4	40	5	235	250	M08	M20	3°	● ▲ ★
DM20K3-M10-215	36	19	40	5	200	215	M10	M20	3°	● ▲ ★
DM20K3-M12-165	36	24	40	5	150	165	M12	M20	3°	● ▲ ★
DM20K3-M16-120	36	29	40	5	105	120	M16	M20	3°	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days


▶ 技术数据 Technical data ➤ K5

Cat.No 产品型号	SW	D1	D2	D3	D4	L1	L2	L3	α	INVENTORY 备货情况
DM10K5-M06-80	22	11.6	24	3	70	80	M06	M10	5°	○ ▲ ★
DM10K5-M08-60	22	15.4	24	3	50	60	M08	M10	5°	○ ▲ ★
DM10K5-M10-40	22	19	24	3	30	40	M10	M10	5°	○ ▲ ★
DM20K5-M08-155	36	15.4	40	5	140	155	M08	M20	5°	○ ▲ ★
DM20K5-M10-135	36	19	40	5	120	135	M10	M20	5°	○ ▲ ★
DM20K5-M12-105	36	24	40	5	90	105	M12	M20	5°	○ ▲ ★
DM20K5-M16-80	36	29	40	5	65	80	M16	M20	5°	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**DM-DM**

梦幻变径杆 EXGRIP Tool Bar With Adjustable Dia

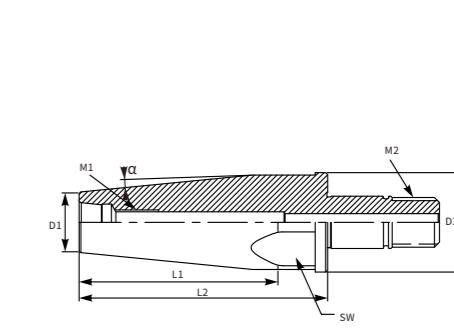

▶ 技术数据 Technical data ➤ K3


Cat.No 产品型号	SW	D1	D2	D3	L1	L2	M	α	INVENTORY 备货情况
DM20K3-DM10K3-160	36	24	40	145	160	M10	M20	3.2°	● ▲ ★
DM20K3-DM10K3-200	36	24	40	185	200	M10	M20	2.5°	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

▶ 技术数据 Technical data ➤ K5

Cat.No 产品型号	SW	D1	D2	D3	L1	L2	M	α	INVENTORY 备货情况
DM20K5-DM10K5-100	36	24	40	85	100	M10	M20	5.4°	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

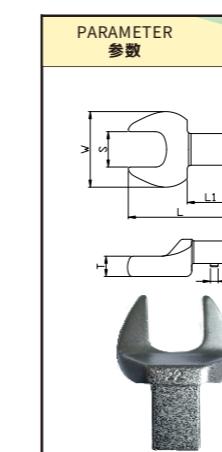

PARAMETER 参数	Cat.No 型号	HS-DM10K	HS-DM20K
S	22	36	
B1	18	18	
B2	14	14	
L	62	74	
L1	25	25	
W	47.5	66.5	
T	11.5	13.7	
d1	5	5	


PARAMETER 参数	Cat.No 型号	GK-100	
Nm 扭力范围		10-100Nm	
SIZE 接口尺寸		14*18mm	
L 总长		370mm	

## DM-R

梦幻锥度铣刀 EXGRIP Taper Milling Cutter

不锈钢、钛合金

Stainless Steel/Titanium Alloy

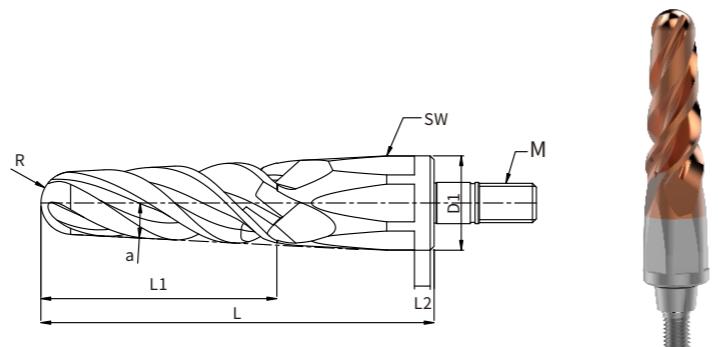

## 技术数据 Technical data ➤ K3


Cat.No 产品型号	R	a	L	L1	L2	Z	D1	SW	M	INVENTORY 备货情况
DM10K3-R4BM-165	4	3°	165	60	5	4	24	22	M10	● ▲ ★
DM10K3-R5BM-145	5	3°	145	60	5	4	24	22	M10	● ▲ ★
DM10K3-R6BM-130	6	3°	130	60	5	4	24	22	M10	● ▲ ★
DM10K3-R8BM-100	8	3°	100	60	5	4	24	22	M10	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

## DM-K

梦幻锥度铣刀 EXGRIP Taper Milling Cutter

铝用 Aluminum

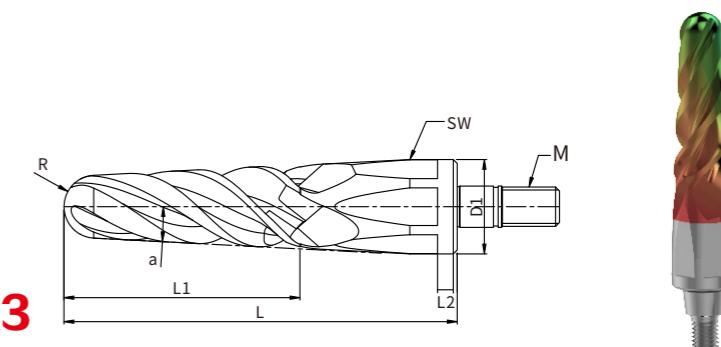

## 技术数据 Technical data ➤ K3

Cat.No 产品型号	R	a	L	L1	L2	Z	D1	SW	M	INVENTORY 备货情况
DM10K3-R4BN-165	4	3°	165	60	5	4	24	22	M10	● ▲ ★
DM10K3-R5BN-145	5	3°	145	60	5	4	24	22	M10	● ▲ ★
DM10K3-R6BN-130	6	3°	130	60	5	4	24	22	M10	● ▲ ★
DM10K3-R8BN-100	8	3°	100	60	5	4	24	22	M10	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

## 技术数据 Technical data ➤ K5

Cat.No 产品型号	R	a	L	L1	L2	Z	D1	SW	M	INVENTORY 备货情况
DM10K5-R2BM-125	2	5°	125	60	5	4	24	22	M10	● ▲ ★
DM10K5-R3BM-115	3	5°	115	60	5	4	24	22	M10	● ▲ ★
DM10K5-R4BM-105	4	5°	105	60	5	4	24	22	M10	● ▲ ★
DM10K5-R5BM-95	5	5°	95	60	5	4	24	22	M10	● ▲ ★
DM10K5-R6BM-90	6	5°	90	60	5	4	24	22	M10	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days


## 技术数据 Technical data ➤ K5

Cat.No 产品型号	R	a	L	L1	L2	Z	D1	SW	M	INVENTORY 备货情况
DM10K5-R2BN-125	2	5°	125	60	5	4	24	22	M10	● ▲ ★
DM10K5-R3BN-115	3	5°	115	60	5	4	24	22	M10	● ▲ ★
DM10K5-R4BN-105	4	5°	105	60	5	4	24	22	M10	● ▲ ★
DM10K5-R5BN-95	5	5°	95	60	5	4	24	22	M10	● ▲ ★
DM10K5-R6BN-90	6	5°	90	60	5	4	24	22	M10	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**EXBK**

梦幻球形铣刀 EXGRIP Spherical Milling Cutter

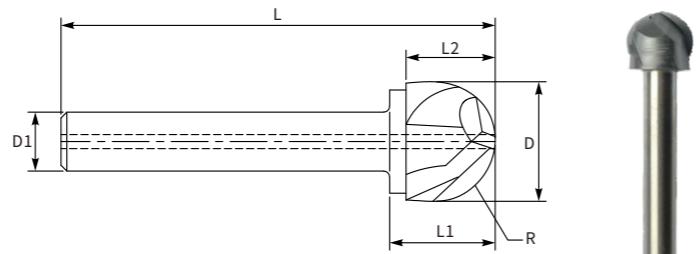**模具钢 Steel**


技术数据 Technical data &gt;&gt;

Cat.No 产品型号	D	R	D1	L	L1	L2	Z	INVENTORY 备货情况
EXBK2-04020-04	4	2	2.9	22.5	6.5	4	2	○ ▲ ★
EXBK2-05025-04	5	2.5	2.9	22.5	6.5	4	2	○ ▲ ★
EXBK2-06030-04	6	3	2.9	22.5	6.5	4	2	○ ▲ ★
EXBK3-06030-04	6	3	2.9	22.5	6.5	4	3	○ ▲ ★
EXBK2-08040-05	8	4	5.9	32.5	7.5	5	2	○ ▲ ★
EXBK3-08040-05	8	4	5.9	32.5	7.5	5	3	○ ▲ ★
EXBK5-08040-05	8	4	5.9	32.5	7.5	5	5	○ ▲ ★
EXBK2-10050-06	10	5	5.9	33.5	8.5	6	2	○ ▲ ★
EXBK3-10050-06	10	5	5.9	33.5	8.5	6	3	○ ▲ ★
EXBK5-10050-06	10	5	5.9	33.5	8.5	6	5	○ ▲ ★
EXBK2-12060-07	12	6	5.9	34.5	9.5	7	2	○ ▲ ★
EXBK3-12060-07	12	6	5.9	34.5	9.5	7	3	○ ▲ ★
EXBK5-12060-07	12	6	5.9	34.5	9.5	7	5	○ ▲ ★
EXBK2-16080-12	16	8	8	50	15	12	2	○ ▲ ★
EXBK5-16080-12	16	8	8	50	15	12	5	○ ▲ ★
EXBK7-16080-12	16	8	8	50	15	12	7	○ ▲ ★
EXBK3-200100-16	20	10	12	54	19	16	3	○ ▲ ★
EXBK3-250125-16	25	12.5	16	58	23	20	3	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**EXRK**

梦幻圆鼻铣刀 EXGRIP Round Nose Milling Cutter

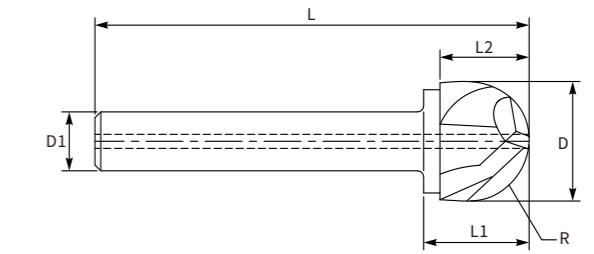**模具钢 Steel**



技术数据 Technical data &gt;&gt;

Cat.No 产品型号	D	R	D1	L	L1	L2	Z	INVENTORY 备货情况
EXRK2-04010-04	4	1	2.9	22.5	6.5	4	2	○ ▲ ★
EXRK2-05010-04	5	1	2.9	22.5	6.5	4	2	○ ▲ ★
EXRK2-06005-04	6	0.5	2.9	22.5	6.5	4	2	○ ▲ ★
EXRK2-06010-04	6	1	2.9	22.5	6.5	4	2	○ ▲ ★
EXRK3-06020-04	6	2	2.9	22.5	6.5	4	3	○ ▲ ★
EXRK3-08005-05	8	0.5	5.9	32.5	7.5	5	3	○ ▲ ★
EXRK2-08010-05	8	1	5.9	32.5	7.5	5	2	○ ▲ ★
EXRK5-08020-05	8	2	5.9	32.5	7.5	5	5	○ ▲ ★
EXRK2-08030-05	8	3	5.9	32.5	7.5	5	3	○ ▲ ★
EXRK3-10005-06	10	0.5	5.9	33.5	8.5	6	3	○ ▲ ★
EXRK5-10010-06	10	1	5.9	33.5	8.5	6	5	○ ▲ ★
EXRK2-10020-06	10	2	5.9	33.5	8.5	6	2	○ ▲ ★
EXRK5-10030-06	10	3	5.9	33.5	8.5	6	5	○ ▲ ★
EXRK3-10040-06	10	4	5.9	33.5	8.5	6	3	○ ▲ ★
EXRK5-12005-07	12	0.5	5.9	34.5	9.5	7	5	○ ▲ ★
EXRK2-12010-07	12	1	5.9	34.5	9.5	7	2	○ ▲ ★
EXRK3-12030-07	12	3	5.9	34.5	9.5	7	3	○ ▲ ★
EXRK5-12050-07	12	5	5.9	34.5	9.5	7	5	○ ▲ ★
EXRK3-16040-12	16	4	8	50	15	12	3	○ ▲ ★
EXRK5-16050-12	16	5	8	50	15	12	5	○ ▲ ★
EXRK5-20050-16	20	5	12	54	19	16	5	○ ▲ ★
EXRK9-20050-16	20	5	12	54	19	16	9	○ ▲ ★
EXRK5-25050-20	25	5	16	58	23	20	5	○ ▲ ★
EXRK9-25050-20	25	5	16	58	23	20	9	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**EXBN** 梦幻球形铣刀 EXGRIP Spherical Milling Cutter

铝用 Aluminum

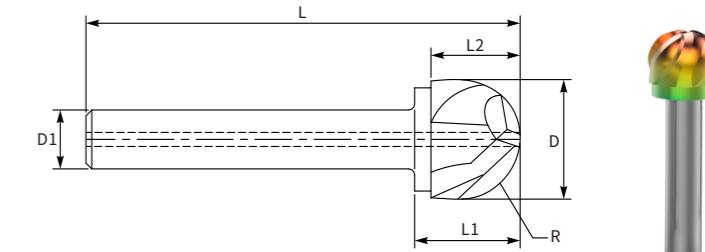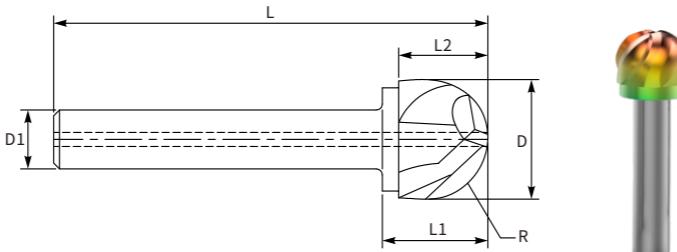**EXBM** 梦幻球形铣刀 EXGRIP Spherical Milling Cutter不锈钢、钛合金  
Stainless Steel/Titanium Alloy


## 技术数据 Technical data &gt;&gt;

Cat.No 产品型号	D	R	D1	L	L1	L2	Z	INVENTORY 备货情况
EXBN2-04020-04	4	2	2.9	22.5	6.5	4	2	○ ▲ ★
EXBN2-05025-04	5	2.5	2.9	22.5	6.5	4	2	○ ▲ ★
EXBN2-06030-04	6	3	2.9	22.5	6.5	4	2	○ ▲ ★
EXBN2-08040-05	8	4	5.9	32.5	7.5	5	2	○ ▲ ★
EXBN2-10050-06	10	5	5.9	33.5	8.5	6	2	○ ▲ ★
EXBN2-12060-07	12	6	5.9	34.5	9.5	7	2	○ ▲ ★
EXBN2-16080-12	16	8	8	50	15	12	2	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**EXRN** 梦幻圆鼻铣刀 EXGRIP Milling Cutter

铝用 Aluminum

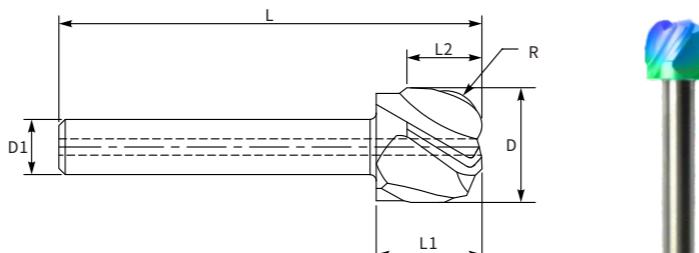

## 技术数据 Technical data &gt;&gt;


Cat.No 产品型号	D	R	D1	L	L1	L2	Z	INVENTORY 备货情况
EXRN2-06002-04	6	0.2	2.9	22.5	6.5	4	2	○ ▲ ★
EXRN2-06005-04	6	0.5	2.9	22.5	6.5	4	2	○ ▲ ★
EXRN2-06010-04	6	1	2.9	22.5	6.5	4	2	○ ▲ ★
EXRN2-08010-05	8	1	5.9	32.5	7.5	5	2	○ ▲ ★
EXRN3-08020-05	8	2	5.9	32.5	7.5	5	3	○ ▲ ★
EXRN2-10010-06	10	1	5.9	33.5	8.5	6	2	○ ▲ ★
EXRN3-10020-06	10	2	5.9	33.5	8.5	6	3	○ ▲ ★
EXRN2-12010-07	12	1	5.9	34.5	9.5	7	2	○ ▲ ★
EXRN5-12030-07	12	3	5.9	34.5	9.5	7	5	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**EXRM** 梦幻圆鼻铣刀 EXGRIP Round Nose Milling Cutter

**不锈钢、钛合金**  
Stainless Steel/Titanium Alloy

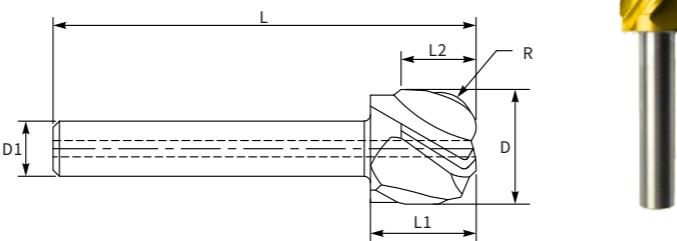


## 技术数据 Technical data &gt;&gt;

Cat.No 产品型号	D	R	D1	L	L1	L2	Z	INVENTORY 备货情况
EXRM2-06010-04	6	1	2.9	22.5	6.5	4	2	○ ▲ ★
EXRM2-08010-05	8	1	5.9	32.5	7.5	5	2	○ ▲ ★
EXRM4-08020-05	8	2	5.9	32.5	7.5	5	4	○ ▲ ★
EXRM2-10020-06	10	2	5.9	33.5	8.5	6	2	○ ▲ ★
EXRM4-10030-06	10	3	5.9	33.5	8.5	6	4	○ ▲ ★
EXRM2-12010-07	12	1	5.9	34.5	9.5	7	2	○ ▲ ★
EXRM4-12030-07	12	3	5.9	34.5	9.5	7	4	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**EXBH** 梦幻球形铣刀 EXGRIP Spherical Milling Cutter

**淬火钢** Hardened Steel

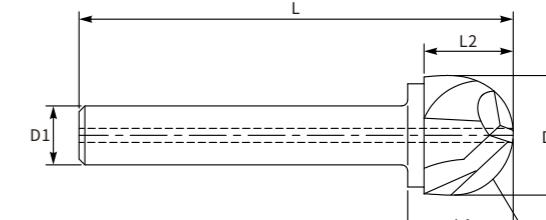


## 技术数据 Technical data &gt;&gt;

Cat.No 产品型号	D	R	D1	L	L1	L2	Z	INVENTORY 备货情况
EXBH2-06030-04	6	3	2.9	22.5	6.5	4	2	○ ▲ ★
EXBH2-08040-05	8	4	5.9	32.5	7.5	5	2	○ ▲ ★
EXBH2-10050-06	10	5	5.9	33.5	8.5	6	2	○ ▲ ★
EXBH2-12060-07	12	6	5.9	34.5	9.5	7	2	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**EXRH** 梦幻圆鼻铣刀 EXGRIP Milling Cutter

**淬火钢** Hardened Steel

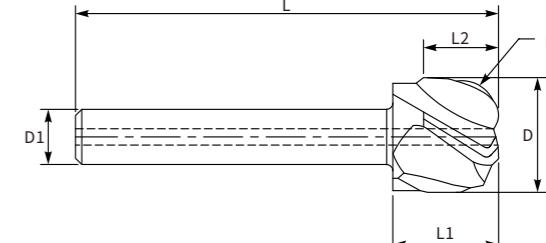

## 技术数据 Technical data &gt;&gt;


Cat.No 产品型号	D	R	D1	L	L1	L2	Z	INVENTORY 备货情况
EXRH3-06020-04	6	2	2.9	22.5	6.5	4	3	○ ▲ ★
EXRH5-08020-05	8	2	5.9	32.5	7.5	5	5	○ ▲ ★
EXRH5-10030-06	10	3	5.9	33.5	8.5	6	5	○ ▲ ★
EXRH5-12040-07	12	4	5.9	34.5	9.5	7	5	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

## SCRN

钨钢圆鼻可换头 Carbide Round Nose End Milling Cutter Head

铝用 Aluminum

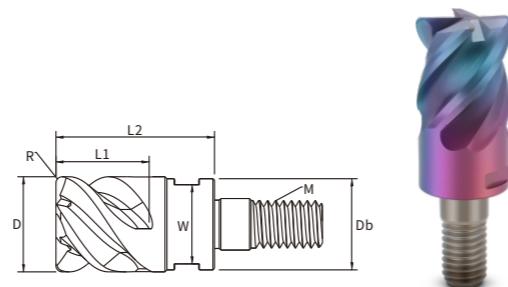

## 技术数据 Technical data


Cat.No 产品型号	D	R	Z	L	L1	Db	W	M	INVENTORY 备货情况
SCRN-31005-M06	10	0.5	3	10	24.5	9.5	8	M06	○ ▲ ★
SCRN-31010-M06	10	1	3	10	24.5	9.5	8	M06	○ ▲ ★
SCRN-31205-M06	12	0.5	3	12	26.5	11.5	10	M06	○ ▲ ★
SCRN-31210-M06	12	1	3	12	26.5	11.5	10	M06	○ ▲ ★
SCRN-31605-M08	16	0.5	3	16	31.8	15.4	13	M08	○ ▲ ★
SCRN-31610-M08	16	1	3	16	31.8	15.4	13	M08	○ ▲ ★
SCRN-32005-M10	20	0.5	3	20	38.8	19.4	17	M10	○ ▲ ★
SCRN-32010-M10	20	1	3	20	38.8	19.4	17	M10	○ ▲ ★
SCRN-32505-M12	25	0.5	3	25	44.8	24.4	22	M12	○ ▲ ★
SCRN-32510-M12	25	1	3	25	44.8	24.4	22	M12	○ ▲ ★
SCRN-33005-M16	30	0.5	3	30	58	29.4	27	M16	○ ▲ ★
SCRN-33010-M16	30	1	3	30	58	29.4	27	M16	○ ▲ ★
SCRN-33205-M16	32	0.5	3	32	58	29.4	27	M16	○ ▲ ★
SCRN-33210-M16	32	1	3	32	58	29.4	27	M16	○ ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

## SCBN

钨钢球形可换头 Carbide Spherical End Milling Cutter Head

铝用 Aluminum

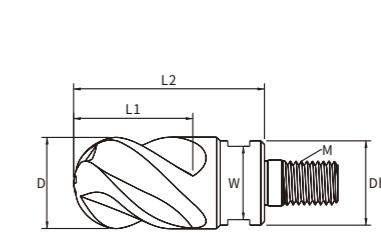

## 技术数据 Technical data


Cat.No 产品型号	D	Z	L	L1	Db	W	M	INVENTORY 备货情况
SCBN-210-M06	10	2	10	24.5	9.5	8	M06	○ ▲ ★
SCBN-212-M06	12	2	12	26.5	11.5	10	M06	○ ▲ ★
SCBN-216-M08	16	2	16	31.8	15.4	13	M08	○ ▲ ★
SCBN-220-M10	20	2	20	38.8	19.4	17	M10	○ ▲ ★
SCBN-225-M12	25	2	25	44.8	24.4	22	M12	○ ▲ ★
SCBN-230-M16	30	2	30	58	29.4	27	M16	○ ▲ ★
SCBN-232-M16	32	2	32	58	29.4	27	M16	○ ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

## SCTN

钨钢平底可换头 Carbide Flat Bottom End Milling Cutter Head

铝用 Aluminum

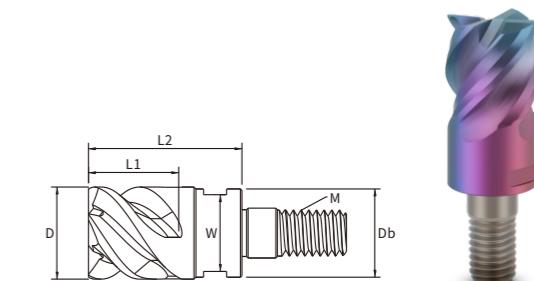

## 技术数据 Technical data

Cat.No 产品型号	D	Z	L	L1	Db	W	M	INVENTORY 备货情况
SCTN-310-M06	10	3	10	24.5	9.5	8	M06	○ ▲ ★
SCTN-312-M06	12	3	12	26.5	11.5	10	M06	○ ▲ ★
SCTN-316-M08	16	3	16	31.8	15.4	13	M08	○ ▲ ★
SCTN-320-M10	20	3	20	38.8	19.4	17	M10	○ ▲ ★
SCTN-325-M12	25	3	25	44.8	24.4	22	M12	○ ▲ ★
SCTN-330-M16	30	3	30	58	29.4	27	M16	○ ▲ ★
SCTN-332-M16	32	3	32	58	29.4	27	M16	○ ▲ ★


注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**SCRM**

钨钢圆鼻可换头 Carbide Round Nose End Milling Cutter Head

不锈钢、钛合金、高温合金、镍基合金

Stainless Steel/Titanium Alloy/High-Temperature Alloy/Nickel Base Alloy

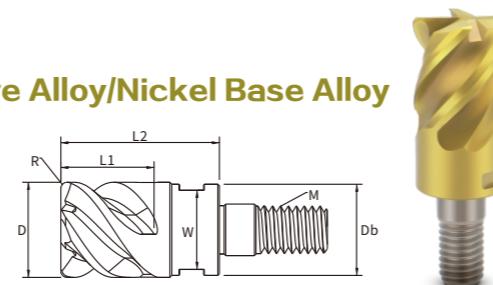

## 技术数据 Technical data

Cat.No 产品型号	D	R	M	D1	L	L1	L2	M	INVENTORY 备货情况
SCRM-61005-M06	10	0.5	6	10	24.5	9.5	8	M06	● ▲ ★
SCRM-61010-M06	10	1	6	10	24.5	9.5	8	M06	● ▲ ★
SCRM-61205-M06	12	0.5	6	12	26.5	11.5	10	M06	● ▲ ★
SCRM-61210-M06	12	1	6	12	26.5	11.5	10	M06	● ▲ ★
SCRM-81605-M08	16	0.5	8	16	31.8	15.4	13	M08	● ▲ ★
SCRM-81610-M08	16	1	8	16	31.8	15.4	13	M08	● ▲ ★
SCRM-82005-M10	20	0.5	8	20	38.8	19.4	17	M10	● ▲ ★
SCRM-82010-M10	20	1	8	20	38.8	19.4	17	M10	● ▲ ★
SCRM-82505-M12	25	0.5	8	25	44.8	24.4	22	M12	● ▲ ★
SCRM-82510-M12	25	1	8	25	44.8	24.4	22	M12	● ▲ ★
SCRM-83005-M16	30	0.5	8	30	58	29.4	27	M16	● ▲ ★
SCRM-83010-M16	30	1	8	30	58	29.4	27	M16	● ▲ ★
SCRM-83205-M16	32	0.5	8	32	58	29.4	27	M16	● ▲ ★
SCRM-83210-M16	32	1	8	32	58	29.4	27	M16	● ▲ ★


注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**SCBM**

钨钢球形可换头 Carbide Spherical End Milling Cutter Head

不锈钢、钛合金、高温合金、镍基合金

Stainless Steel/Titanium Alloy/High-Temperature Alloy/Nickel Base Alloy

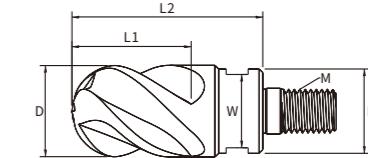

## 技术数据 Technical data

Cat.No 产品型号	D	Z	L	L1	Db	W	M	INVENTORY 备货情况
SCBM-410-M06	10	4	10	24.5	9.5	8	M06	● ▲ ★
SCBM-412-M06	12	4	12	26.5	11.5	10	M06	● ▲ ★
SCBM-416-M08	16	4	16	31.8	15.4	13	M08	● ▲ ★
SCBM-420-M10	20	4	20	38.8	19.4	17	M10	● ▲ ★
SCBM-425-M12	25	4	25	44.8	24.4	22	M12	● ▲ ★
SCBM-430-M16	30	4	30	58	29.4	27	M16	● ▲ ★
SCBM-432-M16	32	4	32	58	29.4	27	M16	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days


**SCTM**

钨钢平底可换头 Carbide Flat Bottom End Milling Cutter Head



不锈钢、钛合金、高温合金、镍基合金

Stainless Steel/Titanium Alloy/High-Temperature Alloy/Nickel Base Alloy

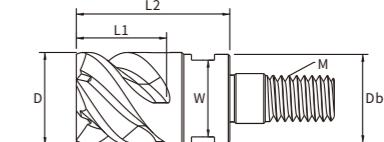

## 技术数据 Technical data


Cat.No 产品型号	D	M	D1	L	L1	L2	M	INVENTORY 备货情况
SCTM-610-M06	10	6	10	24.5	9.5	8	M06	● ▲ ★
SCTM-612-M06	12	6	12	26.5	11.5	10	M06	● ▲ ★
SCTM-816-M08	16	8	16	31.8	15.4	17	M08	● ▲ ★
SCTM-820-M10	20	8	20	38.8	19.4	17	M10	● ▲ ★
SCTM-825-M12	25	8	25	44.8	24.4	22	M12	● ▲ ★
SCTM-830-M16	30	8	30	58	29.4	27	M16	● ▲ ★
SCTM-832-M16	32	8	32	58	29.4	27	M16	● ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**SCRH**

钨钢圆鼻可换头 Carbide Round Nose End Milling Cutter Head

模具钢 Steel

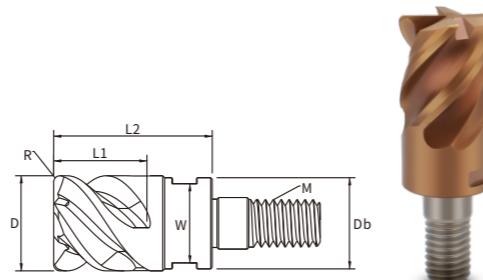

## 技术数据 Technical data ➤


Cat.No 产品型号	D	R	Z	L	L1	Db	W	M	INVENTORY 备货情况
SCRH-61005-M06	10	0.5	6	10	24.5	9.5	8	M06	● ▲ ★
SCRH-61010-M06	10	1	6	10	24.5	9.5	8	M06	● ▲ ★
SCRH-61205-M06	12	0.5	6	12	26.5	11.5	10	M06	● ▲ ★
SCRH-61210-M06	12	1	6	12	26.5	11.5	10	M06	● ▲ ★
SCRH-81605-M08	16	0.5	8	16	31.8	15.4	13	M08	● ▲ ★
SCRH-81610-M08	16	1	8	16	31.8	15.4	13	M08	● ▲ ★
SCRH-82005-M10	20	0.5	8	20	38.8	19.4	17	M10	● ▲ ★
SCRH-82010-M10	20	1	8	20	38.8	19.4	17	M10	● ▲ ★
SCRH-82505-M12	25	0.5	8	25	44.8	24.4	22	M12	● ▲ ★
SCRH-82510-M12	25	1	8	25	44.8	24.4	22	M12	● ▲ ★
SCRH-83005-M16	30	0.5	8	30	58	29.4	27	M16	● ▲ ★
SCRH-83010-M16	30	1	8	30	58	29.4	27	M16	● ▲ ★
SCRH-83205-M16	32	0.5	8	32	58	29.4	27	M16	● ▲ ★
SCRH-83210-M16	32	1	8	32	58	29.4	27	M16	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**SCBH**

钨钢球形可换头 Carbide Spherical End Milling Cutter Head

模具钢 Steel

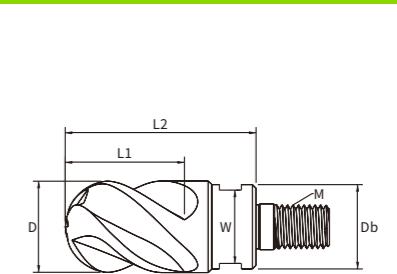

## 技术数据 Technical data ➤


Cat.No 产品型号	D	M	D1	L	L1	L2	M	INVENTORY 备货情况
SCBH-410-M06	10	4	10	24.5	9.5	8	M06	● ▲ ★
SCBH-412-M06	12	4	12	26.5	11.5	10	M06	● ▲ ★
SCBH-416-M08	16	4	16	31.8	15.4	13	M08	● ▲ ★
SCBH-420-M10	20	4	20	38.8	19.4	17	M10	● ▲ ★
SCBH-425-M12	25	4	25	44.8	24.4	22	M12	● ▲ ★
SCBH-430-M16	30	4	30	58	29.4	27	M16	● ▲ ★
SCBH-432-M16	32	4	32	58	29.4	27	M16	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**SCTH**

钨钢平底可换头 Carbide Flat Bottom End Milling Cutter Head

模具钢 Steel

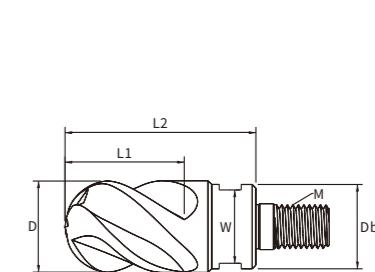

## 技术数据 Technical data ➤

Cat.No 产品型号	D	Z	L	L1	Db	W	M	INVENTORY 备货情况
SCTH-610-M06	10	6	10	24.5	9.5	8	M06	● ▲ ★
SCTH-612-M06	12	6	12	26.5	11.5	10	M06	● ▲ ★
SCTH-816-M08	16	8	16	31.8	15.4	13	M08	● ▲ ★
SCTH-820-M10	20	8	20	38.8	19.4	17	M10	● ▲ ★
SCTH-825-M12	25	8	25	44.8	24.4	22	M12	● ▲ ★
SCTH-830-M16	30	8	30	58	29.4	27	M16	● ▲ ★
SCTH-832-M16	32	8	32	58	29.4	27	M16	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

# 钨合金抗震刀杆系列

Tungsten Alloy Anti-seismic Extension Holder



## • 主要特点 • Main features


- ● 稳定性 Stability
- 灵活性 Flexibility
- 模块化 Modularity

## 目录 / CATALOGUE

热装机	P01-P06
Shrink Fit Machine	
梦幻系列介绍	P07-P10
EXGRIP System Introduce	
梦幻基础柄	P11-P20
Threaded Tool Holder	
热装刀杆	P21-P22
Shrink Fit Extension	
螺纹刀杆	P23
Threaded Tool Rod	
变径杆	P24
Tool Bar With Adjustable Dia	
梦幻锥度铣刀	P25-P26
EXGRIP Taper Milling Cutter	
梦幻铣刀	P27-P32
EXGRIP Milling Cutter	
钨钢可换头	P33-P38
Carbide End Milling Cutter	
钨合金抗震系列介绍	P39-P42
Tungsten Alloy Anti-seismic System Introduce	
钨合金抗震螺纹杆	P43-P48
Tungsten Alloy Anti-seismic Threaded Extension Holder	
螺纹热装转换套(标准铣刀)	P49
Threaded Shrink Fit Standard Conversion Sleeve	
螺纹热装转换套(梦幻铣刀)	P50
Threaded Shrink Fit "EXGRIP" Conversion Sleeve	
钨合金抗震热装杆	P51-P53
Tungsten Alloy Anti-seismic Shrink Fit Extension Holder	
抗震热装转换套(标准铣刀)	P54
Anti-seismic Shrink Fit basic Extension Holder	
抗震热装转换套(梦幻铣刀)	P55
Anti-seismic Shrink Fit Conversion Sleeve	

## 抗震系列组装示意图-螺纹

Assembly Diagram For Anti-seismic-Threaded

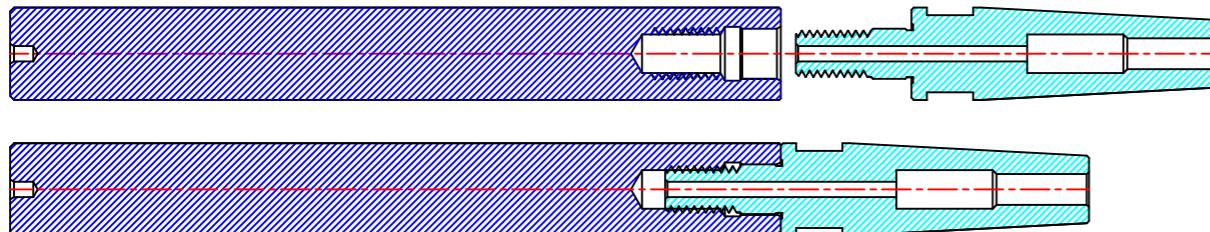

## 命名规则 Naming Rule

**SW 10 - M 08 - 100**


抗震刀杆	柄径大小	螺纹连接	螺纹大小	长度
Anti-seismic	Handle diameter size	Threaded Type	Thread size	Length

**C 12 - M 08 - M RA 04 - 40**

连接方式	接口大小	螺纹连接	接口大小	材质	壁厚	夹持直径	长度
Interface mode	Interface size	Threaded Type	Interface size	Material	Wall thick	Clamping diameter	Length
				M	不锈钢	Standard	
				MRA	标准型	Standard	
				SRD	梦幻型	EXGRIP	

## 抗震系列组装示意图-热装

Assembly Diagram For Anti-seismic-Shrink Fit

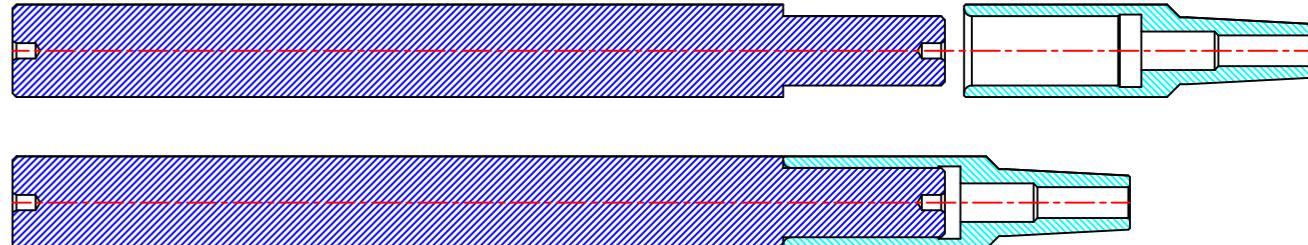

## 命名规则 Naming Rule

**SW 12 - F 09 - M RA 03 - 100**


抗震刀杆	柄径大小	热装连接	接口大小	材质	壁厚	夹持直径	长度
Interface mode	Handle diameter size	Shrink fit type	Interface size	Material	Wall thick	Clamping diameter	Length

**C 12 - F 09 - M RA 03 - 100**

连接方式	接口大小	热装连接	接口大小	材质	壁厚	夹持直径	长度
Interface mode	Interface size	Shrink fit type	Interface size	Material	Wall thick	Clamping diameter	Length
				M	不锈钢	Standard	
				MRA	标准型	Standard	
				SRD	梦幻型	EXGRIP	

**SW**

钨合金抗震螺纹杆 Tungsten Alloy Anti-seismic Threaded Extension Holder




## 技术数据 Technical data

Cat.No 产品型号	L	D1	D2	M	INVENTORY 备货情况
SW10-M06-100	100	10	6.5	M06	○ ▲ ★
SW10-M06-150	150	10	6.5	M06	○ ▲ ★
SW12-M06-100	100	12	6.5	M06	○ ▲ ★
SW12-M06-150	150	12	6.5	M06	○ ▲ ★
SW16-M08-150	150	16	8.5	M08	○ ▲ ★
SW16-M08-200	200	16	8.5	M08	○ ▲ ★
SW20-M10-150	150	20	10.5	M10	○ ▲ ★
SW20-M10-200	200	20	10.5	M10	○ ▲ ★
SW20-M10-250	250	20	10.5	M10	○ ▲ ★
SW25-M12-150	150	25	12.5	M10	○ ▲ ★
SW25-M12-200	200	25	12.5	M12	○ ▲ ★
SW25-M12-250	250	25	12.5	M12	○ ▲ ★
SW25-M12-300	300	25	12.5	M12	○ ▲ ★
SW32-M16-200	200	32	17	M16	○ ▲ ★
SW32-M16-250	250	32	17	M16	○ ▲ ★
SW32-M16-300	300	32	17	M16	○ ▲ ★
SW32-M16-350	350	32	17	M16	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**SW-A**

钨合金抗震螺纹杆 Tungsten Alloy Anti-seismic Threaded Extension Holder




## 技术数据 Technical data

Cat.No 产品型号	L	L1	D1	D2	D3	M	INVENTORY 备货情况
SW10-M06-100-A50	100	50	9.8	6.5	10	M06	○ ▲ ★
SW10-M06-150-A50	150	50	9.8	6.5	10	M06	○ ▲ ★
SW12-M06-100-A50	100	50	11.6	6.5	12	M06	○ ▲ ★
SW12-M06-150-A50	150	50	11.6	6.5	12	M06	○ ▲ ★
SW16-M08-150-A55	150	55	15.4	8.5	16	M08	○ ▲ ★
SW16-M08-200-A55	200	55	15.4	8.5	16	M08	○ ▲ ★
SW20-M10-150-A60	150	60	19	10.5	20	M10	○ ▲ ★
SW20-M10-200-A60	200	60	19	10.5	20	M10	○ ▲ ★
SW20-M10-250-A60	250	60	19	10.5	20	M10	○ ▲ ★
SW25-M12-150-A60	150	60	24	12.5	25	M10	○ ▲ ★
SW25-M12-200-A60	200	60	24	12.5	25	M12	○ ▲ ★
SW25-M12-250-A60	250	60	24	12.5	25	M12	○ ▲ ★
SW25-M12-300-A60	300	60	24	12.5	25	M12	○ ▲ ★
SW32-M16-200-A65	200	65	31	17	32	M16	○ ▲ ★
SW32-M16-250-A65	250	65	31	17	32	M16	○ ▲ ★
SW32-M16-300-A65	300	65	31	17	32	M16	○ ▲ ★
SW32-M16-350-A65	350	65	31	17	32	M16	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**SW**

钨合金抗震螺纹杆 Tungsten Alloy Anti-seismic Threaded Extension Holder

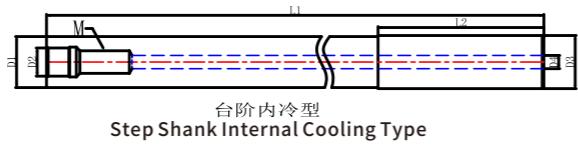


## 技术数据 Technical data

Cat.No 产品型号	L1	L2	D1	D2	D3	D4	M	INVENTORY 备货情况
SW10-M06-100W-A50	100	50	9.8	6.5	10	3	M06	● ▲ ★
SW10-M06-150W-A50	150	50	9.8	6.5	10	3	M06	● ▲ ★
SW12-M06-100W-A50	100	50	11.6	6.5	12	3	M06	● ▲ ★
SW12-M06-150W-A50	150	50	11.6	6.5	12	3	M06	● ▲ ★
SW16-M08-150W-A55	150	55	15.4	8.5	16	4	M08	● ▲ ★
SW16-M08-200W-A55	200	55	15.4	8.5	16	4	M08	● ▲ ★
SW20-M10-150W-A60	150	60	19	10.5	20	4	M10	● ▲ ★
SW20-M10-200W-A60	200	60	19	10.5	20	4	M10	● ▲ ★
SW20-M10-250W-A60	250	60	19	10.5	20	4	M10	● ▲ ★
SW25-M12-150W-A60	150	60	24	12.5	25	6	M10	● ▲ ★
SW25-M12-200W-A60	200	60	24	12.5	25	6	M12	● ▲ ★
SW25-M12-250W-A60	250	60	24	12.5	25	6	M12	● ▲ ★
SW25-M12-300W-A60	300	60	24	12.5	25	6	M12	● ▲ ★
SW32-M16-200W-A65	200	65	31	17	32	6	M16	● ▲ ★
SW32-M16-250W-A65	250	65	31	17	32	6	M16	● ▲ ★
SW32-M16-300W-A65	300	65	31	17	32	6	M16	● ▲ ★
SW32-M16-350W-A65	350	65	31	17	32	6	M16	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**SW-A**

钨合金抗震螺纹杆 Tungsten Alloy Anti-seismic Threaded Extension Holder

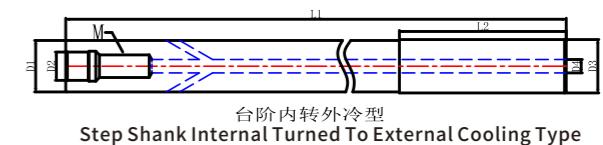


## 技术数据 Technical data

Cat.No 产品型号	L1	L2	D1	D2	D3	D4	M	INVENTORY 备货情况
SW10-M06-100WE-A50	100	50	9.8	6.5	10	3	M06	● ▲ ★
SW10-M06-150WE-A50	150	50	9.8	6.5	10	3	M06	● ▲ ★
SW12-M06-100WE-A50	100	50	11.6	6.5	12	3	M06	● ▲ ★
SW12-M06-150WE-A50	150	50	11.6	6.5	12	3	M06	● ▲ ★
SW16-M08-150WE-A55	150	55	15.4	8.5	16	4	M08	● ▲ ★
SW16-M08-200WE-A55	200	55	15.4	8.5	16	4	M08	● ▲ ★
SW20-M10-150WE-A60	150	60	19	10.5	20	4	M10	● ▲ ★
SW20-M10-200WE-A60	200	60	19	10.5	20	4	M10	● ▲ ★
SW20-M10-250WE-A60	250	60	19	10.5	20	4	M10	● ▲ ★
SW25-M12-150WE-A60	150	60	24	12.5	25	6	M10	● ▲ ★
SW25-M12-200WE-A60	200	60	24	12.5	25	6	M12	● ▲ ★
SW25-M12-250WE-A60	250	60	24	12.5	25	6	M12	● ▲ ★
SW25-M12-300WE-A60	300	60	24	12.5	25	6	M12	● ▲ ★
SW32-M16-200WE-A65	200	65	31	17	32	6	M16	● ▲ ★
SW32-M16-250WE-A65	250	65	31	17	32	6	M16	● ▲ ★
SW32-M16-300WE-A65	300	65	31	17	32	6	M16	● ▲ ★
SW32-M16-350WE-A65	350	65	31	17	32	6	M16	● ▲ ★

注: ● 现货 ▲15个工作日 ★20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**SW**

钨合金抗震螺纹杆 Tungsten Alloy Anti-seismic Threaded Extension Holder

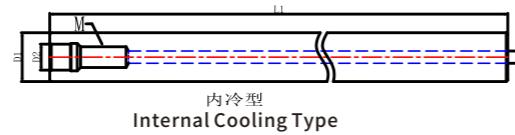

技术数据 Technical data

Cat.No 产品型号	L	D1	D2	D2	M	INVENTORY 备货情况
SW10-M06-100W	100	10	6.5	3	M06	○ ▲ ★
SW10-M06-150W	150	10	6.5	3	M06	○ ▲ ★
SW12-M06-100W	100	12	6.5	3	M06	○ ▲ ★
SW12-M06-150W	150	12	6.5	3	M06	○ ▲ ★
SW16-M08-150W	150	16	8.5	4	M08	○ ▲ ★
SW16-M08-200W	200	16	8.5	4	M08	○ ▲ ★
SW20-M10-150W	150	20	10.5	4	M10	○ ▲ ★
SW20-M10-200W	200	20	10.5	4	M10	○ ▲ ★
SW20-M10-250W	250	20	10.5	4	M10	○ ▲ ★
SW25-M12-150W	150	25	12.5	6	M10	○ ▲ ★
SW25-M12-200W	200	25	12.5	6	M12	○ ▲ ★
SW25-M12-250W	250	25	12.5	6	M12	○ ▲ ★
SW25-M12-300W	300	25	12.5	6	M12	○ ▲ ★
SW32-M16-200W	200	32	17	6	M16	○ ▲ ★
SW32-M16-250W	250	32	17	6	M16	○ ▲ ★
SW32-M16-300W	300	32	17	6	M16	○ ▲ ★
SW32-M16-350W	350	32	17	6	M16	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**SW**

钨合金抗震螺纹杆 Tungsten Alloy Anti-seismic Threaded Extension Holder



技术数据 Technical data

Cat.No 产品型号	L	D1	D2	D3	M	INVENTORY 备货情况
SW10-M06-100WE	100	10	6.5	3	M06	○ ▲ ★
SW10-M06-150WE	150	10	6.5	3	M06	○ ▲ ★
SW12-M06-100WE	100	12	6.5	3	M06	○ ▲ ★
SW12-M06-150WE	150	12	6.5	3	M06	○ ▲ ★
SW16-M08-150WE	150	16	8.5	4	M08	○ ▲ ★
SW16-M08-200WE	200	16	8.5	4	M08	○ ▲ ★
SW20-M10-150WE	150	20	10.5	4	M10	○ ▲ ★
SW20-M10-200WE	200	20	10.5	4	M10	○ ▲ ★
SW20-M10-250WE	250	20	10.5	4	M10	○ ▲ ★
SW25-M12-150WE	150	25	12.5	6	M10	○ ▲ ★
SW25-M12-200WE	200	25	12.5	6	M12	○ ▲ ★
SW25-M12-250WE	250	25	12.5	6	M12	○ ▲ ★
SW25-M12-300WE	300	25	12.5	6	M12	○ ▲ ★
SW32-M16-200WE	200	32	17	6	M16	○ ▲ ★
SW32-M16-250WE	250	32	17	6	M16	○ ▲ ★
SW32-M16-300WE	300	32	17	6	M16	○ ▲ ★
SW32-M16-350WE	350	32	17	6	M16	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**C-F-MRA**

螺纹热装转换套(标准铣刀) Threaded Shrink Fit Standard Conversion Sleeve

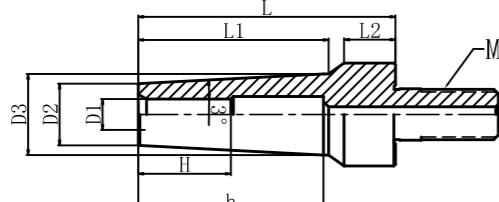


图1

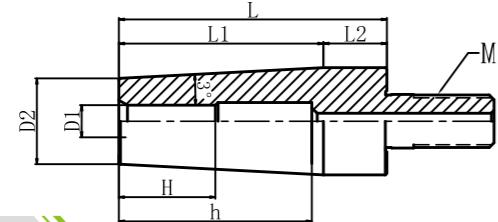


图2

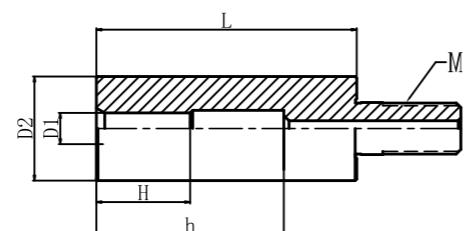


图3

## 技术数据 Technical data


Cat.No 产品型号	D1	D2	D3	L	L1	L2	H	h	M	FIG	INVENTORY 备货情况
C10-M06-MRA03-40	3	7.5	-	40	23.85	26.15	10	25	M06	2	● ▲ ★
C10-M06-MRA04-40	4	10	-	40	-	-	12	25	M06	3	● ▲ ★
C12-M06-MRA03-40	3	7.5	10.17	40	27	10	10	25	M06	1	● ▲ ★
C12-M06-MRA04-40	4	10	-	40	19.08	30.92	12	25	M06	2	● ▲ ★
C12-M06-MRA06-50	6	12	-	50	-	-	18	36	M06	3	● ▲ ★
C16-M08-MRA04-40	4	10	12.67	40	27	10	12	25	M08	1	● ▲ ★
C16-M08-MRA06-50	6	12	-	50	38.16	11.84	18	36	M08	2	● ▲ ★
C16-M08-MRA08-50	8	14	-	50	19.08	10	25	45	M08	2	● ▲ ★
C16-M08-MRA10-60	10	16	-	50	-	-	30	52	M08	3	● ▲ ★
C20-M10-MRA06-50	4	12	15.72	50	37	10	18	36	M10	1	● ▲ ★
C20-M10-MRA08-50	6	14	17.72	50	37	10	25	45	M10	1	● ▲ ★
C20-M10-MRA10-60	8	16	-	60	38.16	11.84	30	52	M10	2	● ▲ ★
C20-M10-MRA12-60	10	20	-	60	-	-	36	60	M10	3	● ▲ ★
C25-M12-MRA06-50	6	12	15.72	50	37	10	18	36	M12	1	● ▲ ★
C25-M12-MRA08-50	8	14	17.72	50	37	10	25	45	M12	1	● ▲ ★
C25-M12-MRA10-60	10	16	20.77	60	47	10	30	52	M12	1	● ▲ ★
C25-M12-MRA12-60	12	20	24.77	60	47	10	36	60	M12	1	● ▲ ★
C32-M16-MRA10-60	10	16	20.77	60	47	10	30	52	M16	1	● ▲ ★
C32-M16-MRA12-60	12	20	24.77	60	47	10	36	60	M16	1	● ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**SM-M-SRD**

螺纹热装梦幻转换套 Threaded Shrink Fit "EXGRIP" Conversion Sleeve

## 技术数据 Technical data

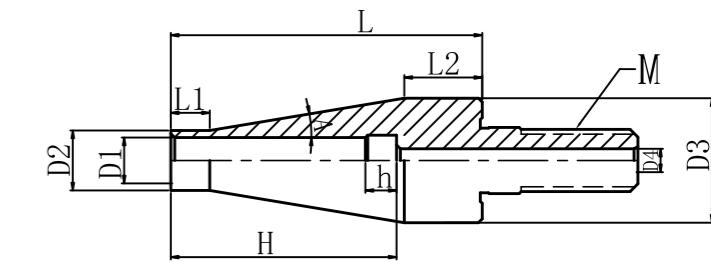


Cat.No 产品型号	D	D1	D2	D3	D4	L	L1	L2	L3	H	h	INVENTORY 备货情况
C10-M06-SRD04-40	2.9	3.7	10	2	40	5	10	16	2	M10	7.18°	● ▲ ★
C10-M06-SRD05-40	2.9	4.7	10	2	40	5	10	16	2	M10	6.05°	● ▲ ★
C10-M06-SRD06-40	2.9	5.5	10	2	40	5	10	16	2	M10	5.14°	● ▲ ★
C12-M06-SRD04-40	2.9	3.7	12	2	40	5	10	16	2	M12	9.43°	● ▲ ★
C12-M06-SRD05-40	2.9	4.7	12	2	40	5	10	16	2	M12	8.31°	● ▲ ★
C12-M06-SRD06-40	2.9	5.5	12	2	40	5	10	16	2	M12	7.41°	● ▲ ★
C16-M08-SRD04-40	2.9	3.7	16	3.5	40	5	10	16	/	M16	13.82°	● ▲ ★
C16-M08-SRD05-40	2.9	4.7	16	3.5	40	5	10	16	/	M16	12.73°	● ▲ ★
C16-M08-SRD06-40	2.9	5.5	16	3.5	40	5	10	16	/	M16	11.86°	● ▲ ★
C16-M08-SRD08-40	5.9	7.7	16	3	40	5	10	30	5	M16	9.43°	● ▲ ★
C16-M08-SRD10-40	5.9	9.5	16	3	40	5	10	30	5	M16	7.41°	● ▲ ★
C16-M08-SRD12-40	5.9	11.5	16	3	40	5	10	30	5	M16	5.14°	● ▲ ★
C20-M10-SRD04-40	2.9	3.7	20	4	40	5	10	16	/	M20	18.06°	● ▲ ★
C20-M10-SRD05-40	2.9	4.7	20	4	40	5	10	16	/	M20	17.01°	● ▲ ★
C20-M10-SRD06-40	2.9	5.5	20	4	40	5	10	16	/	M20	16.17°	● ▲ ★
C20-M10-SRD08-40	5.9	7.7	20	4	40	5	10	30	5	M20	13.82°	● ▲ ★
C20-M10-SRD10-40	5.9	9.5	20	4	40	5	10	30	5	M20	11.86°	● ▲ ★
C20-M10-SRD12-40	5.9	11.5	20	4	40	5	10	30	5	M20	9.65°	● ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**C-F-MRA/MSB**

钨合金抗震热装杆 Tungsten Alloy Anti-seismic Shrink Fit Extension Holder




## 技术数据 Technical data

Cat.No 产品型号	D	D1	D2	D3	L	L1	L2	L3	H	h	INVENTORY 备货情况
C10-F07-MRA03-115	10	3	6	7	115	70	45	21	9	22	● ▲ ★
C10-F07-MRA03-145	10	3	6	7	145	100	45	21	9	22	● ▲ ★
C10-F07-MRA04-115	10	4	7	7	115	70	45	21	12	22	● ▲ ★
C10-F07-MRA04-145	10	4	7	7	145	100	45	21	12	22	● ▲ ★
C10-F07-MSB06-115	10	6	10	7	155	70	45	21	18	27	● ▲ ★
C10-F07-MSB06-145	10	6	10	7	145	100	45	21	18	27	● ▲ ★
C12-F09-MRA03-115	12	3	6	9	115	70	45	21	9	22	● ▲ ★
C12-F09-MRA03-145	12	3	6	9	145	100	45	21	9	22	● ▲ ★
C12-F09-MRA04-115	12	4	7	9	115	70	45	21	12	22	● ▲ ★
C12-F09-MRA04-145	12	4	7	9	145	100	45	21	12	22	● ▲ ★
C12-F09-MSB06-115	12	6	10	9	115	70	45	21	18	27	● ▲ ★
C12-F09-MSB06-145	12	6	10	9	145	100	45	21	18	27	● ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**C-F-MRA/MSB**

钨合金抗震热装杆 Tungsten Alloy Anti-seismic Shrink Fit Extension Holder




## 技术数据 Technical data

Cat.No 产品型号	D	D1	D2	D3	D4	L	L1	L2	L3	H	h	FIG	INVENTORY 备货情况
C16-F09-MRA03-140	16	3	6	9	9	140	95	45	21	9	22	2	● ▲ ★
C16-F09-MRA03-200	16	3	6	9	9	200	155	45	21	9	22	2	● ▲ ★
C16-F09-MRA03-225	16	3	6	9	9	225	180	45	21	9	22	2	● ▲ ★
C16-F09-MRA04-140	16	4	7	9	9	140	95	45	21	12	22	2	● ▲ ★
C16-F09-MRA04-200	16	4	7	9	9	200	155	45	21	12	22	2	● ▲ ★
C16-F09-MRA04-225	16	4	7	9	9	225	180	45	21	12	22	2	● ▲ ★
C16-F09-MSB06-140	16	6	10	9	9	140	95	45	21	18	27	2	● ▲ ★
C16-F09-MSB06-200	16	6	10	9	9	200	155	45	21	18	27	2	● ▲ ★
C16-F09-MSB06-225	16	6	10	9	9	225	180	45	21	18	27	2	● ▲ ★
C16-F12-MSB06-140	16	6	10	12	/	140	80	60	26	18	32	1	● ▲ ★
C16-F12-MSB06-200	16	6	10	12	/	200	140	60	26	18	32	1	● ▲ ★
C16-F12-MSB06-225	16	6	10	12	/	225	165	60	26	18	32	1	● ▲ ★
C20-F12-MSB06-200	20	6	10	12	12	200	140	60	25	18	32	2	● ▲ ★
C20-F12-MSB06-250	20	6	10	12	12	250	190	60	25	18	32	2	● ▲ ★
C20-F12-MSB06-300	20	6	10	12	12	300	240	60	25	18	32	2	● ▲ ★
C20-F12-MSB08-200	20	8	13	12	12	200	140	60	25	24	32	2	● ▲ ★
C20-F12-MSB08-250	20	8	13	12	12	250	190	60	25	24	32	2	● ▲ ★
C20-F12-MSB08-300	20	8	13	12	12	300	240	60	25	24	32	2	● ▲ ★
C20-F16-MSB08-200	20	8	13	16	/	200	130	70	30	24	38	1	● ▲ ★
C20-F16-MSB08-250	20	8	13	16	/	250	180	70	30	24	38	1	● ▲ ★
C20-F16-MSB08-300	20	8	13	16	/	300	230	70	30	24	38	1	● ▲ ★
C20-F16-MSB10-200	20	10	16	16	/	200	130	70	30	30	38	1	● ▲ ★
C20-F16-MSB10-250	20	10	16	16	/	250	180	70	30	30	38	1	● ▲ ★
C20-F16-MSB10-300	20	10	16	16	/	300	230	70	30	30	38	1	● ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days

**C-F-MSB**

钨合金抗震热装杆Tungsten Alloy Anti-seismic Shrink Fit Extension Holder

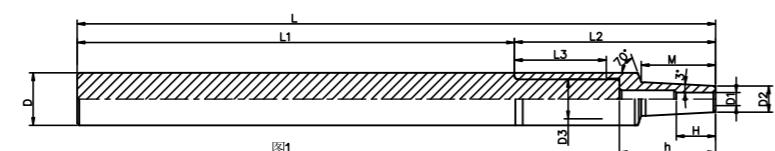


## 技术数据 Technical data

Cat.No 产品型号	D	D1	D2	D3	L	L1	L2	L3	H	h	INVENTORY 备货情况
C25-F16-MSB06-205	25	6	10	16	205	135	70	30	18	32	○ ▲ ★
C25-F16-MSB06-250	25	6	10	16	250	180	70	30	18	32	○ ▲ ★
C25-F16-MSB06-300	25	6	10	16	300	230	70	30	18	32	○ ▲ ★
C25-F16-MSB06-350	25	6	10	16	350	280	70	30	18	32	○ ▲ ★
C25-F16-MSB08-205	25	8	13	16	205	135	70	30	24	38	○ ▲ ★
C25-F16-MSB08-250	25	8	13	16	250	180	70	30	24	38	○ ▲ ★
C25-F16-MSB08-300	25	8	13	16	300	230	70	30	24	38	○ ▲ ★
C25-F16-MSB08-350	25	8	13	16	350	280	70	30	24	38	○ ▲ ★
C25-F16-MSB10-205	25	10	16	16	205	135	70	30	30	38	○ ▲ ★
C25-F16-MSB10-250	25	10	16	16	250	180	70	30	30	38	○ ▲ ★
C25-F16-MSB10-300	25	10	16	16	300	230	70	30	30	38	○ ▲ ★
C25-F16-MSB10-350	25	10	16	16	350	280	70	30	30	38	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

**C-F-MRA/MSB**

抗震热装转换套Anti-seismic Shrink Fit Conversion Sleeve

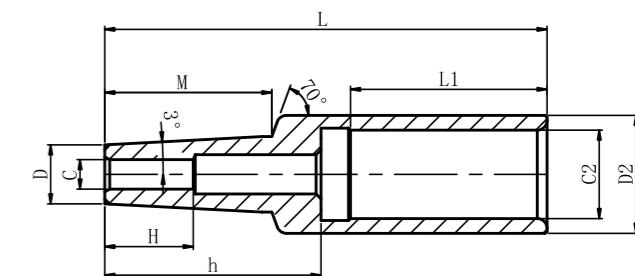


## 技术数据 Technical data

Cat.No 产品型号	C2	D2	D	C	M	L	L1	H	h	INVENTORY 备货情况
C10-F07-MRA03-45	7	10	6	3	17	45	20	9	22	○ ▲ ★
C10-F07-MRA04-45	7	10	7	4	17	45	20	12	22	○ ▲ ★
C10-F07-MSB06-45	7	10	10	6	19	45	20	18	22	○ ▲ ★
C12-F09-MRA03-45	9	12	6	3	17	45	20	9	22	○ ▲ ★
C12-F09-MRA04-45	9	12	7	4	17	45	20	12	22	○ ▲ ★
C12-F09-MSB06-45	9	12	10	6	19	45	20	18	22	○ ▲ ★
C16-F12-MSB06-60	12	16	10	6	22	60	25	18	32	○ ▲ ★
C16-F12-MSB08-60	12	16	13	8	22	60	25	24	32	○ ▲ ★
C16-F12-MSB10-60	12	16	16	10	22	60	25	30	32	○ ▲ ★
C20-F16-MSB06-70	16	20	10	6	22	70	29	18	38	○ ▲ ★
C20-F16-MSB08-70	16	20	13	8	22	70	29	24	38	○ ▲ ★
C20-F16-MSB10-70	16	20	16	10	22	70	29	30	38	○ ▲ ★
C25-F16-MSB06-70	16	25	10	6	22	70	29	18	38	○ ▲ ★
C25-F16-MSB08-70	16	25	13	8	22	70	29	24	38	○ ▲ ★
C25-F16-MSB10-70	16	25	16	10	22	70	29	30	38	○ ▲ ★

注: ●现货 ▲15个工作日 ★20个工作日  
Notes: ●In stock ▲15 days ★20 days

## C-F-SRD

抗震热装梦幻转换套 Anti-seismic Shrink Fit Conversion Sleeve

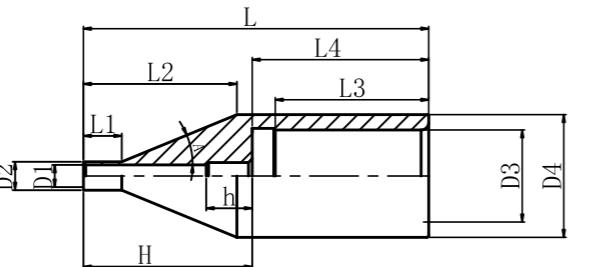

## ▶ 技术数据 Technical data

Cat.No 产品型号	D1	D2	D3	D4	L	L1	L2	L3	L4	H	h	A	INVENTORY 备货情况
C10-F07-SRD04-45	2.9	3.7	7	10	45	5	20	20	23	22	6	15.46°	○ ▲ ★
C10-F07-SRD05-45	2.9	4.7	7	10	45	5	20	20	23	22	6	13.68°	○ ▲ ★
C10-F07-SRD06-45	2.9	5.5	7	10	45	5	20	20	23	22	6	11.86°	○ ▲ ★
C12-F09-SRD04-45	2.9	3.7	9	12	45	5	20	20	23	22	6	15.46°	○ ▲ ★
C12-F09-SRD05-45	2.9	4.7	9	12	45	5	20	20	23	22	6	13.68°	○ ▲ ★
C12-F09-SRD06-45	2.9	5.5	9	12	45	5	20	20	23	22	6	11.86°	○ ▲ ★
C16-F09-SRD04-45	2.9	3.7	9	16	45	5	20	20	23	22	6	15.46°	○ ▲ ★
C16-F09-SRD05-45	2.9	4.7	9	16	45	5	20	20	23	22	6	13.68°	○ ▲ ★
C16-F09-SRD06-45	2.9	5.5	9	16	45	5	20	20	23	22	6	11.86°	○ ▲ ★
C16-F12-SRD08-60	5.9	7.7	12	16	60	5	30	25	28	32	7	9.43°	○ ▲ ★
C16-F12-SRD10-60	5.9	9.5	12	16	60	5	30	25	28	32	7	7.41°	○ ▲ ★
C16-F12-SRD12-60	5.9	11.5	12	16	60	5	30	25	28	32	7	5.14°	○ ▲ ★
C20-F12-SRD08-60	5.9	7.7	12	20	60	5	30	25	28	32	7	9.43°	○ ▲ ★
C20-F12-SRD10-60	5.9	9.5	12	20	60	5	30	25	28	32	7	7.41°	○ ▲ ★
C20-F12-SRD12-60	5.9	11.5	12	20	60	5	30	25	28	32	7	5.14°	○ ▲ ★
C20-F16-SRD08-65	5.9	7.7	16	20	65	5	35	30	33	32	7	9.43°	○ ▲ ★
C20-F16-SRD10-65	5.9	9.5	16	20	65	5	35	30	33	32	7	7.41°	○ ▲ ★
C20-F16-SRD12-65	5.9	11.5	16	20	65	5	35	30	33	32	7	5.14°	○ ▲ ★

注: ● 现货 ▲ 15个工作日 ★ 20个工作日  
Notes: ● In stock ▲ 15 days ★ 20 days