



TM

NEURAL
INDUSTRIAL AUTOMATION



**Control.
Automation.
Reliability.**

Redefining Innovation And Excellence

About us

Company Profile:

Neural Industrial Automation Pvt Ltd. is a leading provider of automation systems for Pharmaceutical and Food industries. We develop customized solutions to meet the unique requirements of each client. Our expertise lies in Process Measurement and Control, Interlocking and Lighting Control solutions for Clean Room areas as well Access Control and Security.

Key Data



Mission:

Leveraging technological expertise, fast paced R&D, a wide range of quality products and exceptional customer service, we strive to build long lasting relationships with clients across the Pharmaceutical Manufacturing sector

Vision:

To serve as an integrated solution provider, working with our partners to meet all electronics, instrumentation, monitoring, access and security needs of our clients.



Door Interlocking System

1. Door Interlocking System – up to 16 Doors

Features:

- 01 Customisable for all budgets and user requirements via Keypad Selection – Configurable Timers, Status and indications
- 02 Connectivity to BMS via MODBUS or Potential Free Contacts available
- 03 Seamless integration with Access Control and Security
- 04 Logic capacity – up to 16 doors, Normally Closed or Normally Open.
- 05 Flame proof Interlocking




Go Wait Keypad



No touch Keypad
(Flush type)



Go wait with
no touch

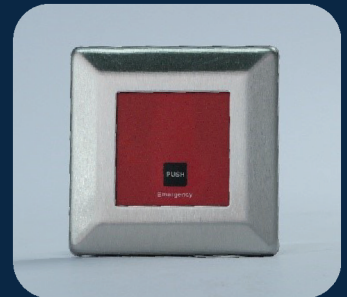

Emergency
Keypad 3X3

2. Passbox Interlocking System – up to 3 Doors

Features:

- 01 Custom operational logic developed at request
- 02 Choice of Static/Dynamic Controllers for every model
- 03 Connectivity to BMS via Potential Free Contacts available
- 04 Flame proof passbox controller



Dynamic Pass
Box Controller




Smart+ Keypad



Dynamic Pass Box
Controller



FLP GO/Wait Keypad

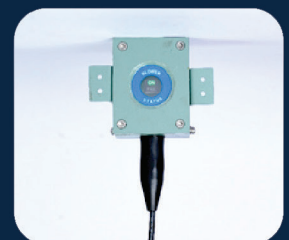

FLP Blower Trip
Status Indicator

3. Air Shower – up to 5 Doors

Features:

- 01 Selectable Shower Cycle Time – 0..250 Secs / Mins
- 02 Customizable Blower Count
- 03 Display module for Indication, Shower Timing and Control
- 04 Trip Indications
- 05 Flameproof model available
- 06 Control options – Display and Control Module with Auto/Manual Mode.



Air Shower Controller



Air Shower DPM

4. Laminar Air Flow / Bio Safety Controller

USPs:

- 01 Upto 4 Output Channels – UV/CFL/Blower / Monochromatic Light.
- 02 Blower Trip Indications
- 03 Backlit Touch Model Available
- 04 Adaptable to garment cubicles

LAF Display Module



Changeroom Automation


Smart Locker

- Biometric Access
- Locker assignment as per Availability
- High Utilisation – High Safety



Automatic Shoe Cover Machine

- Automatic Dispensing and Loading
- Upto 200 Covers per refill

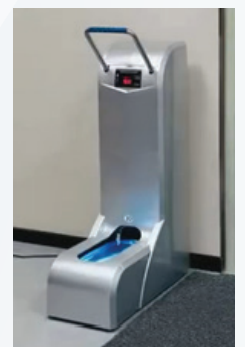


Industrial Control & Automation Solutions

End-to-end industrial automation solutions including design, engineering, programming, panel manufacturing, commissioning, and support services

Siemens System Integrator

SIEMENS

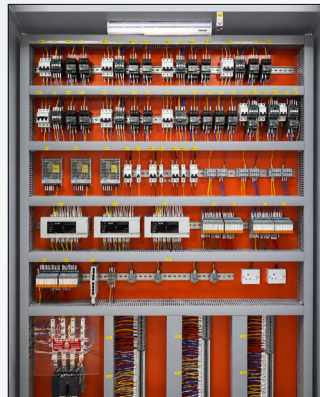

Mitsubishi and Schneider systems on request.

Core Solutions

- PLC-Based Automation Systems
- HMI & SCADA Development
- Building Management Systems (BMS)
- Environmental Monitoring Systems (EMS)
- AHU, HVAC Process & Utility Automation
- Data Acquisition & Reporting Systems

Specialized Applications

- AHU , Dehumidifier Control Systems
- Laminar Air Flow Systems / Biosafety Cabinets
- Mist/Water/Air Shower Systems
- Pass Box Automation

Siemens Automation Solutions

Supply, programming, commissioning, and support of:

PLCs

- SIMATIC S7-1200
- SIMATIC S7-1500
- ET200 Distributed I/O
- LOGO! Controllers

HMI Systems

- SIMATIC Basic Panels
- Comfort Panels
- Unified Comfort Panels
- Industrial PCs

Variable Frequency Drives

- SINAMICS V20
- SINAMICS G120
- SINAMICS G120X
- SINAMICS S120

Monitoring and Sensors


Wireless EMS

Cleanroom Instruments and Displays Connected Wirelessly to central System

In House Software

Features:

- Live Dashboard
- Device Management
- User Management
- Alarm History
- Equipment Status
- Statistical Reports
- Trend Analysis
- Historical Data Storage
- Multi-level User Access
- Remote Monitoring

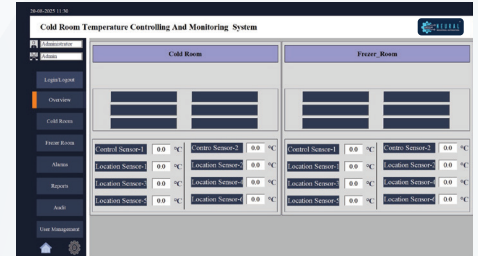


In House Software

Wired Option also Available


Measurands:

- Differential Pressure
- Temperature
- Relative Humidity
- Air Velocity
- Particle Count
- Lux Level
- Noise Level

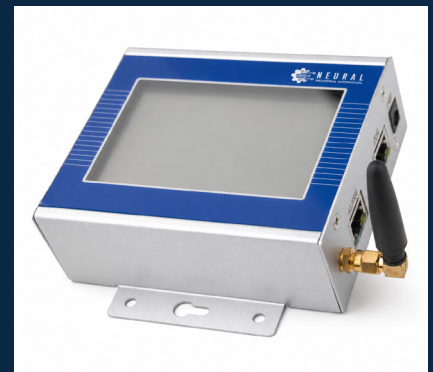

Entrance Automation

- Swing Door Automation
- Automatic swing door opening mechanism
- For both single / double leaf door
- Opening force - 100 to 200 kg
- Both push – and pull mechanism available
- Motor type - 24 V BLDC.
- Speed adjustment - Adjustable.
- Integration with Biometrics.
- Safety features – obstacle detection with sensors, emergency manual release.
- Sliding Door Mechanisms
- High Speed Shutters
- Flap Barriers with ESD Detection

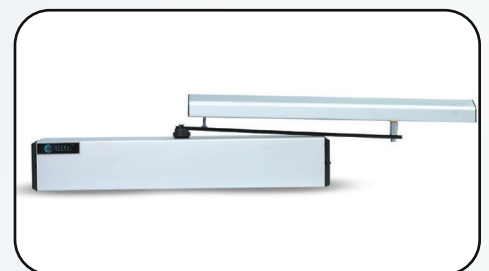

Swing Door Mechanism



**Integration with Biometric access
/ Door Interlock / Shower Systems**

Digital Clocks

- Wired/ Wireless with GPS
- Master Slave Configuration
- Connection to SCADA server via MODBUS
- Power supply (230 VAC).
- Display type (7-seg LED).
- Accuracy (± 1 sec/day).
- Communication (Wireless, MODBUS RTU).

Flush Mounting for cleanrooms



Cleanroom Monitors

3-4 Channel

Configurable Differential Pressure, Temperature, Relative Humidity and Clock
Connection to SCADA server via MODBUS

Flush Mounting for cleanrooms

Process Instruments



Differential Pressure Indicator
with 733 Frames




Differential Pressure Indicator
with Round Frame 4-20mA



Analog Gauge -60 to 60 Pascal



Analog Gauge 0 to 10 mm of Wc

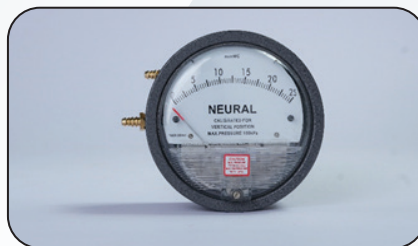

Analog Gauge 0 to 25 mm of Wc



Digital Gauge With LCD Screen

- Analog Differential Pressure Gauge
- Multiple ranges and units available – upto 1000 Pa / 100 mmWC
- Retrofittable for cleanrooms and equipment

Digital Differential Pressure Indicator/ Transmitter


Features:

- 01 4..20 mA / MODBUS output
- 02 Selectable Pa / mmwc units
- 03 Inbuilt High/Low alarms with Indications
- 04 Accuracy: $\pm 1.5\%$, Resolution: 1 Pa, 0.1 mmwc
- 05 Pressure range - 0–50 mmwc, 0–100mmwc.
- 06 Accuracy levels ($\pm 1.5\%$)
- 07 Resolution 1 Pa, 0.1 mmWC
- 08 Output signal - 4–20 mA, Modbus RTU.

Transmitters from E+E Elektronik, Austria



Air Velocity Transmitters

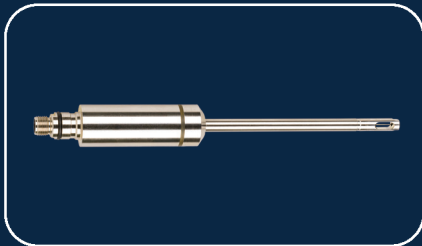

UI Listed and GMP Compliant Solutions

- Dew Point
- Humidity
- Differential Pressure
- CO₂
- Air Velocity
- Flow
- Temperature
- Moisture in Oil

FLP and NFLP 3 Channel Differential Pressure Display with Filter Choke Indicator

Features:

- Real-time monitoring of differential pressure across 3 channels
- Integrated filter choke indicator for early maintenance alerts
- Bright digital display for cleanroom environments
- Available in rugged FLP enclosure for hazardous areas

ESD Solutions

Complete ESD Compliance Solution

Unlike conventional periodic ESD testing, our system continuously monitors personnel, equipment, workstations, and environmental conditions, providing immediate alerts whenever an unsafe condition occurs. The platform integrates ESD monitoring with intelligent access control, allowing only compliant personnel to enter critical production areas.

- Continuous real-time ESD monitoring
- Turnstile / Flap Barrier with ESD Detection and Access Control
- Wrist / Ankle strap monitoring
- Equipment grounding monitoring
- Employee workstation and Table mat grounding monitoring
- Temperature & Humidity monitoring
- Centralized software dashboard
- Instant visual & audible alarms
- Historical data logging
- Wireless / RS485 / Industrial Network communication



Hardware Portfolio


- Wrist Strap Monitor
Continuous dual wrist strap monitoring with table mat supervision.
- Equipment Ground Monitor
Monitor one or multiple equipment grounding points continuously.
- Table Mat Monitor
Monitor up to three independent ESD workbench mats.
- Intelligent Turnstile Integrated:
 - o Face/Card Recognition
 - o ESD Testing
 - o Access Control



Light Control Systems



Light Control System
(LED, Monochromatic)

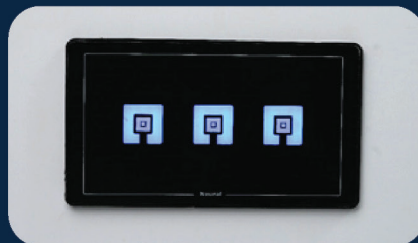

3 Channel Light Controller



Socket with Switch Control

Our signature product, electronic switchboards to control cleanroom lights and AC power sockets.

Features:

- 01 Flush Mountable
- 02 Inbuilt Clean Mode
- 03 Keypads are operated on DC power
- 04 No chances of short circuit
- 05 Easy Plug and Play Installation
- 06 Load capacity per channel - 5A resistive load.
- 07 Backlit status indication. - color to be selected at time of order

Cleanroom Panel Intercom

Features:

- Two-Way Audio Communication into Classified Area
- Installation near View Panel / Pass Box
- Push to Talk
- Flush Mount



Security Systems


Biometric and/or ID Based Access Control Systems from multiple manufactures

- For Biometric/ID access: compatible with RFID, fingerprint, face recognition all available



We provide installation, software setup and integration services as well.

Accessories

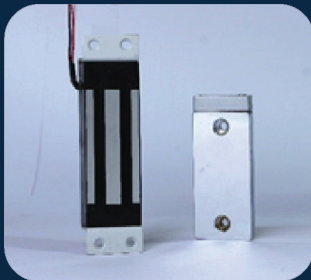


300 LBS Magnet
Clamp Type




600 LBS Magnet FLP




600 LBS Magnet

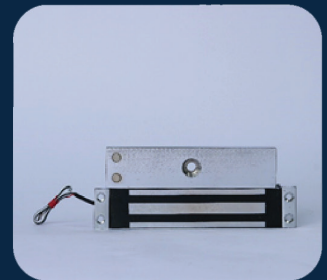

600 LBS Magnet
Clamp Type



300 LBS Magnet



1122 SMPS



SMPS 3A

Major Client





Contact us:



89777 24519



sales@neuralindustrialautomation.in



www.neuralindustrialautomation.com



2-1/126, N NCL Lane, Ruby Block, Satyam Enclave,
Kompally, Hyderabad – 500014