



SYS Mode and Configuration

Mode

Debug Serial Wire

☒ System Wake-Up


Timebase Source SysTick

Configuration

Warning: This peripheral has no parameters to be configured.

Pinout view

System view

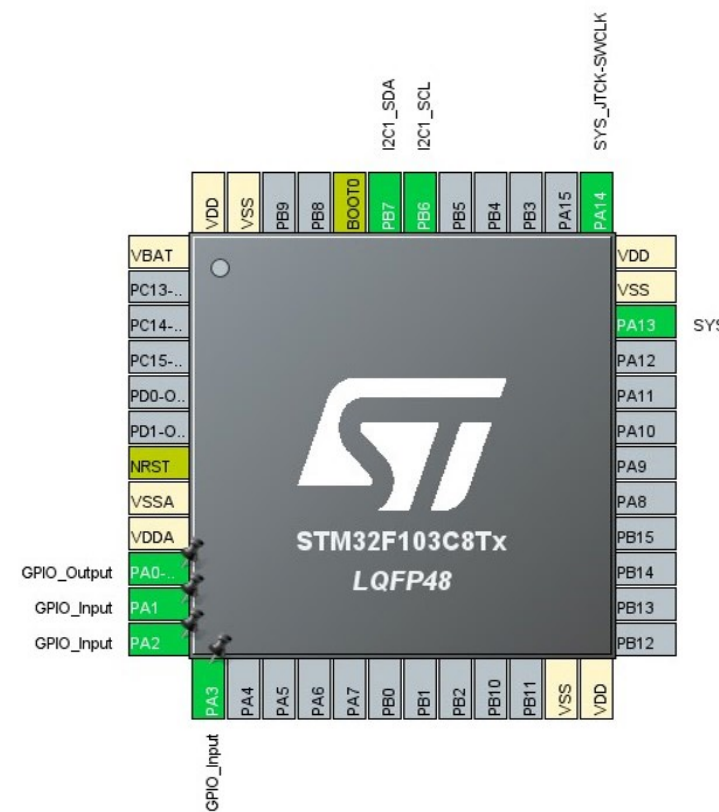



GPIO Mode and Configuration

Configuration

Group By Peripherals

GPIO I2C SYS

Search Signals

Search (Ctrl+F)


☐ Show only Modified Pins

Pin N...	Signal on...	GPIO out...	GPIO mo...	GPIO Pul...	Maximum...	User Label	Modified
PA0-WK...	n/a	Low	Output P...	No pull-u...	Low		☐
PA1	n/a	n/a	Input mode	Pull-up	n/a		☒
PA2	n/a	n/a	Input mode	Pull-up	n/a		☒
PA3	n/a	n/a	Input mode	Pull-up	n/a		☒

? Select Pins from table to configure them. **Multiple selection is Allowed.**

Pinout view

System view

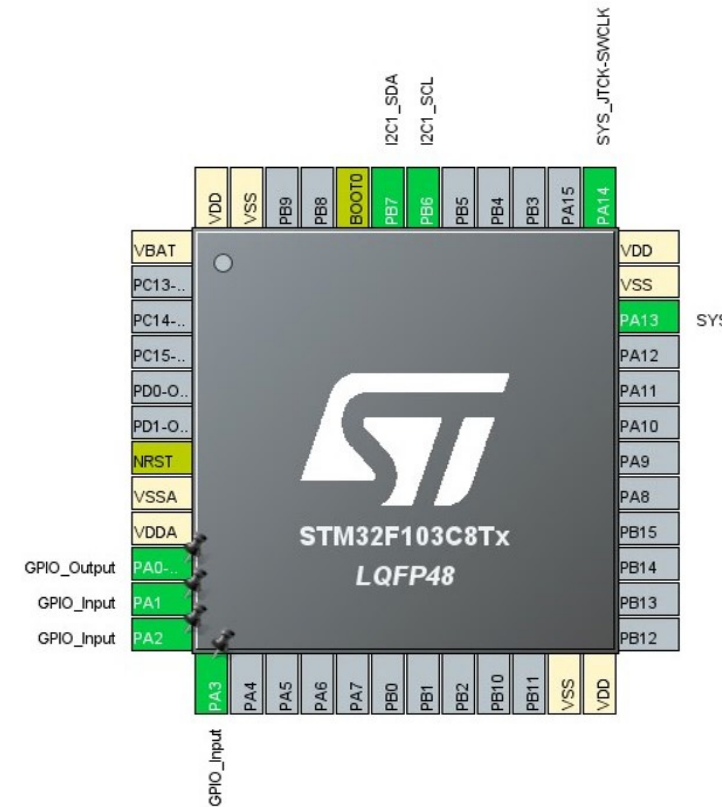



TIM3 Mode and Configuration

Mode

Slave Mode DisableTrigger Source Disable☒ Internal ClockChannel1 DisableChannel2 DisableChannel3 DisableChannel4 DisableCombined Channels Disable

Configuration

Reset Configuration

☒ User Constants☒ NVIC Settings☒ DMA Settings☒ Parameter Settings

Configure the below parameters :

Counter Settings

Prescaler (PSC - 16 bits value) 7199

Counter Mode Up

Counter Period (AutoReload Regist.. 4999

Internal Clock Division (CKD) No Division

auto-reload preload Disable


Trigger Output (TRGO) Parameters

Master/Slave Mode (MSM bit) Disable (Trigger input effect not delayed)

Trigger Event Selection Reset (UG bit from TIMx_EGR)

Pinout view

System view

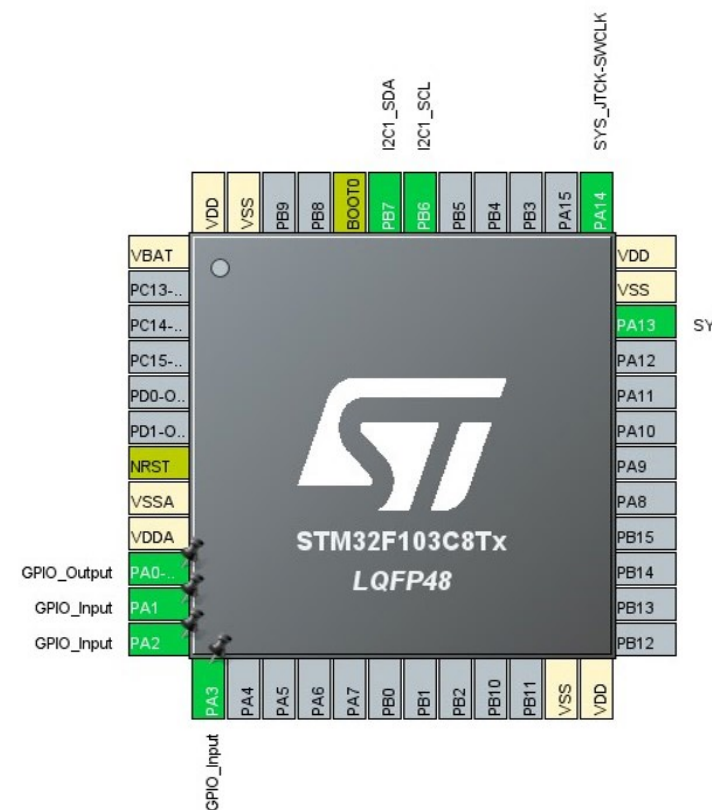



TIM3 Mode and Configuration

Mode

Slave Mode DisableTrigger Source Disable☒ Internal ClockChannel1 DisableChannel2 DisableChannel3 DisableChannel4 DisableCombined Channels Disable

Configuration


Reset Configuration

☒ User Constants☒ NVIC Settings☒ DMA Settings☒ Parameter Settings

NVIC Interrupt Table	Enabled	Preemption Priority	Sub Priority
TIM3 global interrupt	☒	0	0

Pinout view

System view

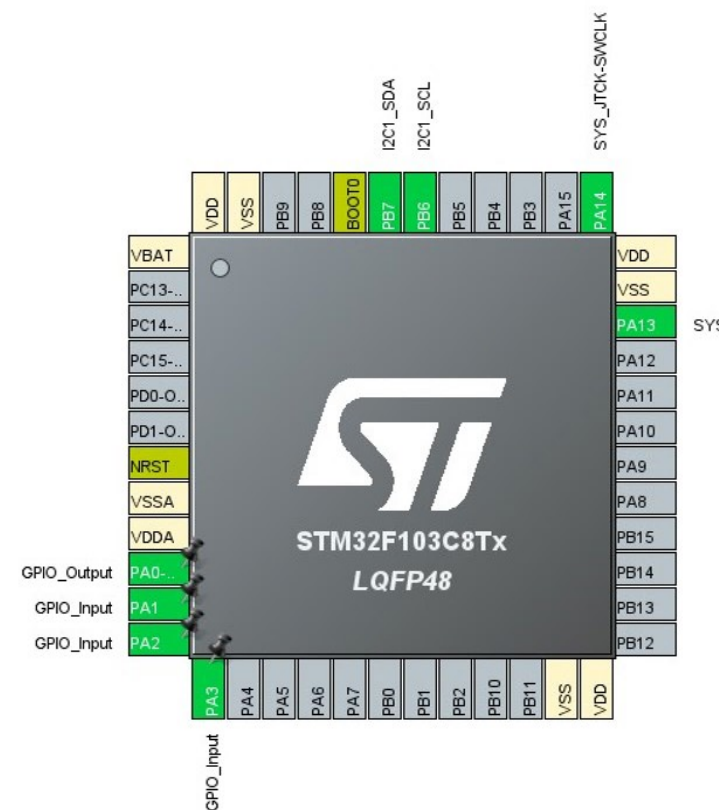

I2C1 Mode and Configuration

Mode

I2C I2C

Configuration

Reset Configuration

NVIC Settings

DMA Settings

GPIO Settings

Parameter Settings

User Constants

Configure the below parameters :

Search (Ctrl+F)

Master Features

I2C Speed Mode Standard Mode

I2C Clock Speed (Hz) 100000

Slave Features

Clock No Stretch Mode Disabled

Primary Address Length selection 7-bit

Dual Address Acknowledged Disabled

Primary slave address 0

General Call address detection Disabled

Pinout view

System view

