01 / SMART SITE SAFETY


# Confined Space
## Sensor Kit

### Know who is inside.

BLE location beacons and a wearable LoRaWAN® tracker connect personnel to a 4G-enabled gateway and tablet. Portable equipment. One connected kit.

**LOCATE. CONNECT. MONITOR.**

CONFINED SPACE / DEPLOYMENT CONCEPT

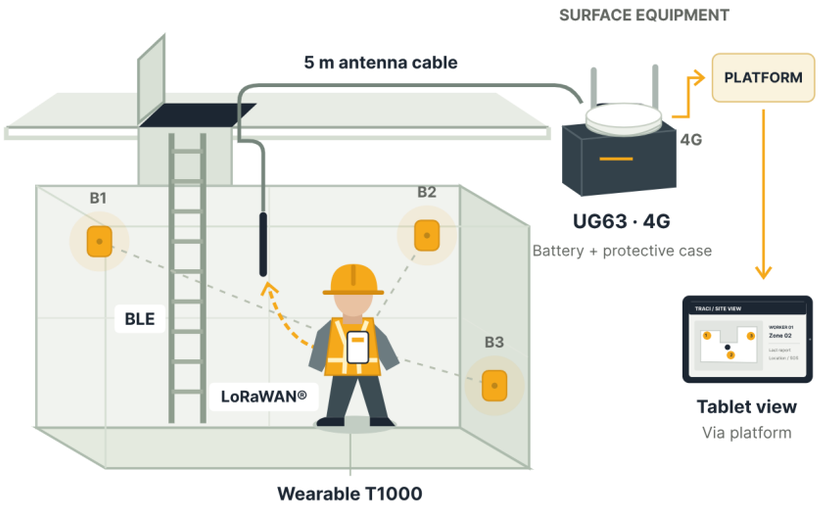


Illustrative deployment. Verify placement and radio coverage on site.

ONE PORTABLE KIT




## BUILT FOR CONFINED SPACE LOCATION WORKFLOWS

**01**
### LOCATE PERSONNEL
Three fixed BLE reference points support zone-based location.

**02**
### CONNECT THE SITE
LoRaWAN® uplinks reach the gateway; 4G carries data to the platform.

**03**
### VIEW ON A TABLET
Access personnel location and SOS events through an integrated platform.

## COMPLETE SYSTEM CONFIGURATION

6 KIT GROUPS

**01**
### UG63 + antenna

1 × 4G LoRaWAN® gateway
External antenna + 5 m cable

**02**
### 3 × BC02 beacons

Fixed BLE location references
IP68 / IK08 beacon housing

**03**
### T1000 tracker

Wearable LoRaWAN® tracker
Quantity matched to crew size

**04**
### Battery supply

Portable gateway power
Capacity / runtime to confirm

**05**
### Protective casing

Housing for central equipment
Final enclosure to confirm

**06**
### Tablet

Site monitoring interface
Model / platform to confirm

Battery / case photos are references; tablet / antenna are illustrated. Final accessory models to confirm.

SEAMLESS SITE INTEGRATION
## Open 4S

Connect location data to TRACI or your preferred platform.
Support on-site visibility through an integrated workflow.
Platform integration and dashboard configuration are required.



Embuilded™
Embedded intelligence for the built world.

CONTACT
**Freddie Leung**
BD Manager
freddie@embuilded.com
+852 9385 5543

# Location. Connectivity. Visibility.

Core hardware for a portable personnel location kit.

## T1000 / WEARABLE TRACKER

SENSECAP · LORAWAN® VERSION



**Card-size. IP65.**

| | |
|---|---|
| **Positioning** | GNSS / Wi-Fi scanning / BLE scanning |
| **Data link** | LoRaWAN® v1.0.4 Class A |
| **Dimensions** | 85 × 55 × 6.5 mm |
| **Power** | 700 mAh rechargeable lithium battery |
| **User interface** | SOS button, LED and buzzer |

Indoor location is resolved by the application using beacon IDs and RSSI.

## BC02 / LOCATION BEACONS

3 FIXED LOCATION REFERENCES



**IP68 / IK08**

| | |
|---|---|
| **Bluetooth** | Bluetooth® LE 5.0 / iBeacon |
| **Dimensions** | 115 × 100 × 29 mm |
| **Battery** | 4,000 mAh replaceable Li/$SOCl_2$ |
| **Protection** | IP68 ingress / IK08 impact resistance |
| **Role in the kit** | Broadcast fixed reference IDs to the tracker |

Beacon positions and zone mapping are verified during site commissioning.

## UG63 / GATEWAY & FIELD EQUIPMENT

4G VERSION + EXTERNAL ANTENNA




**LoRaWAN® + 4G**

| | |
|---|---|
| **LoRaWAN® gateway** | 8 channels; 4G LTE / Ethernet backhaul |
| **Antenna extension** | External antenna with a 5 m cable |
| **Power & enclosure** | Matched battery supply + protective casing |
| **Site display** | Tablet via the connected monitoring platform |

UG63 is IP30; keep it in protected housing. SIM / data service required.

## HOW THE KIT CONNECTS

SYSTEM CONCEPT

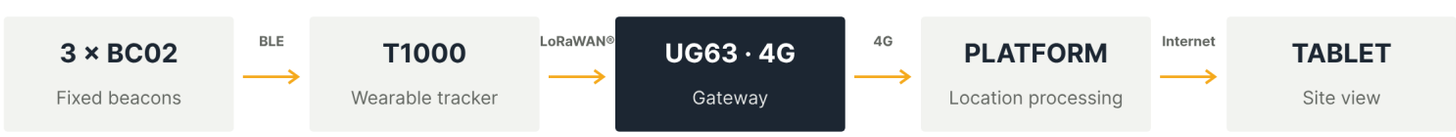


**Validate radio coverage, beacon placement and platform integration on site.**

Scope: personnel location. Gas / oxygen sensing is outside this kit. Accessory models remain subject to confirmation.



Embuilded™
Embedded intelligence for the built world.

CONTACT

**Freddie Leung**
BD Manager

freddie@embuilded.com
+852 9385 5543