01 / SMART SITE SAFETY


Confined Space
Sensor Kit

Know who is inside.

BLE location beacons and a wearable LoRaWAN® tracker connect personnel to a 4G-enabled gateway and tablet. Portable equipment. One connected kit.

LOCATE. CONNECT. MONITOR.

CONFINED SPACE / DEPLOYMENT CONCEPT

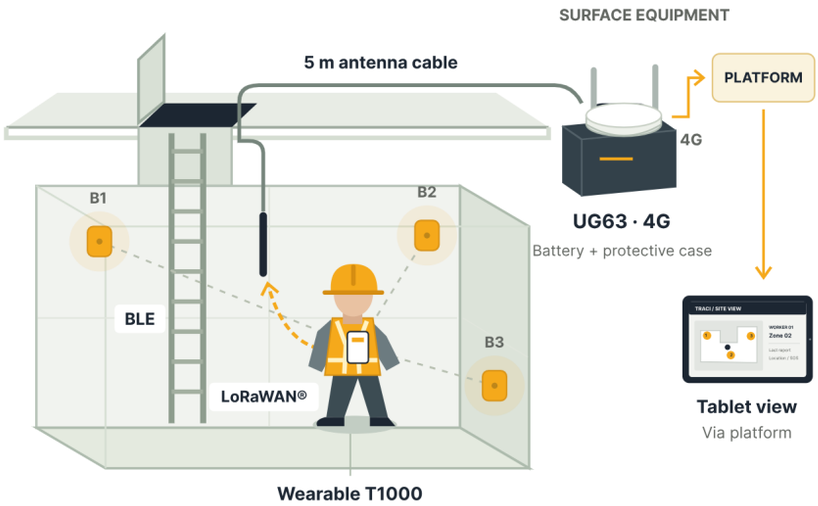

Illustrative deployment. Verify placement and radio coverage on site.

ONE PORTABLE KIT



3 × BC02 · T1000 · UG63 · Battery · Case · Tablet

BUILT FOR CONFINED SPACE LOCATION WORKFLOWS

01
LOCATE PERSONNEL
Three fixed BLE reference points support zone-based location.

02
CONNECT THE SITE
LoRaWAN® uplinks reach the gateway; 4G carries data to the platform.

03
VIEW ON A TABLET
Access personnel location and SOS events through an integrated platform.

COMPLETE SYSTEM CONFIGURATION

6 KIT GROUPS

01
UG63 + antenna

1 × 4G LoRaWAN® gateway
External antenna + 5 m cable

02
3 × BC02 beacons

Fixed BLE location references
IP68 / IK08 beacon housing

03
T1000 tracker

Wearable LoRaWAN® tracker
Quantity matched to crew size

04
Battery supply

Portable gateway power
Capacity / runtime to confirm

05
Protective casing

Housing for central equipment
Final enclosure to confirm

06
Tablet

Site monitoring interface
Model / platform to confirm

Battery / case photos are references; tablet / antenna are illustrated. Final accessory models to confirm.

SEAMLESS SITE INTEGRATION
Open 4S

Connect location data to TRACI or your preferred platform.
Support on-site visibility through an integrated workflow.
Platform integration and dashboard configuration are required.

Embuilded™
Embedded intelligence for the built world.

CONTACT
Freddie Leung
BD Manager
freddie.leung@embuilded.com
+852 9385 5543

Location. Connectivity. Visibility.

Core hardware for a portable personnel location kit.

T1000 / WEARABLE TRACKER

SENSECAP · LORAWAN® VERSION



Card-size. IP65.

Positioning	GNSS / Wi-Fi scanning / BLE scanning
Data link	LoRaWAN® v1.0.4 Class A
Dimensions	85 × 55 × 6.5 mm
Power	700 mAh rechargeable lithium battery
User interface	SOS button, LED and buzzer

Indoor location is resolved by the application using beacon IDs and RSSI.

BC02 / LOCATION BEACONS

3 FIXED LOCATION REFERENCES



IP68 / IK08

Bluetooth	Bluetooth® LE 5.0 / iBeacon
Dimensions	115 × 100 × 29 mm
Battery	4,000 mAh replaceable Li/$SOCl_2$
Protection	IP68 ingress / IK08 impact resistance
Role in the kit	Broadcast fixed reference IDs to the tracker

Beacon positions and zone mapping are verified during site commissioning.

UG63 / GATEWAY & FIELD EQUIPMENT

4G VERSION + EXTERNAL ANTENNA




LoRaWAN® + 4G

LoRaWAN® gateway	8 channels; 4G LTE / Ethernet backhaul
Antenna extension	External antenna with a 5 m cable
Power & enclosure	Matched battery supply + protective casing
Site display	Tablet via the connected monitoring platform

UG63 is IP30; keep it in protected housing. SIM / data service required.

HOW THE KIT CONNECTS

SYSTEM CONCEPT

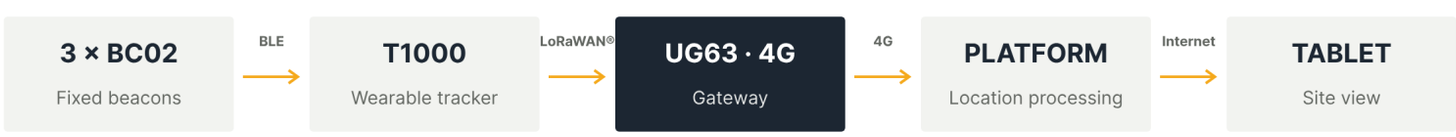

Validate radio coverage, beacon placement and platform integration on site.

Scope: personnel location. Gas / oxygen sensing is outside this kit. Accessory models remain subject to confirmation.

Embuilded™
Embedded intelligence for the built world.

CONTACT

Freddie Leung
BD Manager

freddie.leung@embuilded.com
+852 9385 5543