TRACI™

01 / SMART SITE SAFETY

Outrigger
Monitoring Kit


Four points. One connected kit.

Track each extending outrigger, with magnetic mounts, 4G connectivity and local alerts.

APPLICATION OVERVIEW



Magnetic mounting.
For sensors and target boards.



01 **Sensor**

02 **Target board**

Illustrative mounting concept
Base photo: Cjp24 / Wikimedia Commons — CC BY-SA 4.0 · AI cutout + kit overlay

BUILT FOR OUTRIGGER MONITORING

SENSE
MEASURE FOUR POINTS
Four ToF sensors with matching magnetic target boards.

CONNECT
CONNECT & ALERT
LoRaWAN® sensing with 4G backhaul and local siren / strobe alerts.

DEPLOY
DEPLOY AS ONE KIT
Magnetic mounting and a waterproof case for the central equipment.

IN THE KIT

HARDWARE INCLUDED

01
4 × EM400-TLD
ToF distance sensors with magnetic mounts.



02
4 × Target boards
One matching target per sensor, with magnetic mounts.



03
1 × UG63 · 4G
LoRaWAN® gateway with cellular backhaul.



04
Siren & strobe
Audible and visual local alerting.



05
Waterproof case
Protective housing for the central equipment.



Accessory images are references; final models, mounting geometry and alarm integration remain to be confirmed.

SENSE. CONNECT. ALERT. Four monitoring points. One complete kit.

Embuilded™
Embedded intelligence for the built world.

CONTACT
Freddie Leung
BD Manager
freddie.leung@embuilded.com
+852 9385 5543


02 / COMPONENT DETAILS & SYSTEM FLOW

Measure. Connect. Alert.

Component references 01–05 follow the kit list on page 1.

01 + 02 / SENSOR–TARGET PAIR

EM400-TLD + MAGNETIC TARGET BOARD



4 × matched pairs

2–350 cm

SENSOR DETECTION RANGE

Technology	Time-of-flight (ToF) laser distance sensing
Detection accuracy	±2 cm (−20°C to +70°C)
Resolution / field of view	1 mm / 27°
Target alignment	Upright board facing the inboard sensor
Sensor protection	IP67 rated sensor enclosure
Link / configuration	LoRaWAN® / NFC via Milesight ToolBox

Sensor fixed inboard; target moves with the extending section.
Horizontal relative distance; final mounting and orientation to confirm.

03 / GATEWAY & BACKHAUL

UG63 · 4G VERSION




LoRaWAN® + 4G

Sensor network	8-channel LoRaWAN® gateway
Backhaul	4G LTE / Ethernet
Housing (05)	Installed in the kit's waterproof case
Gateway protection	IP30 · protected installation required
Alarm integration (04)	Siren / strobe via a matched control interface

Power, cellular service and the local alarm interface are matched during integration.

HOW THE FOUR POINTS CONNECT

FOUR PAIRS / ONE AT EACH OUTRIGGER

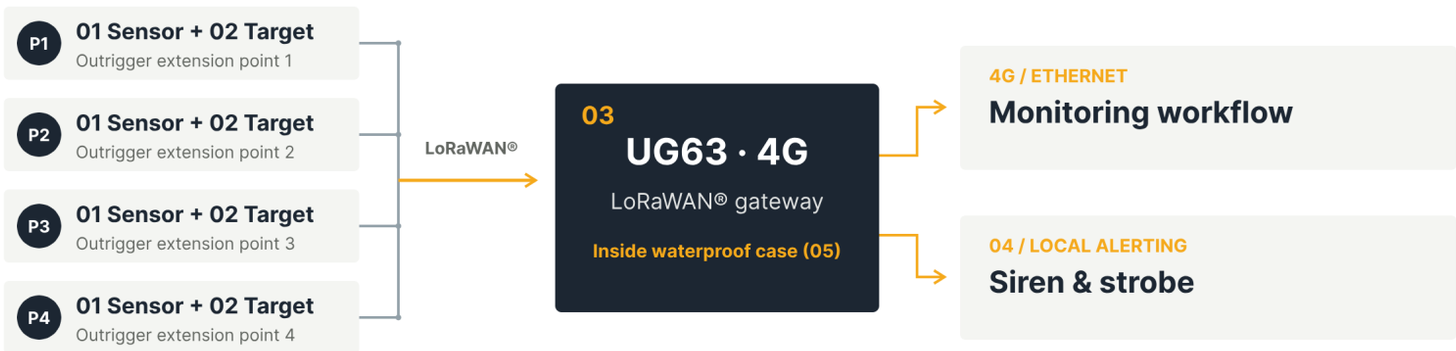

Concept flow. Confirm lateral installation, thresholds, power and alarm interface during integration.

01 Sensor / 02 Target board / 03 Gateway / 04 Siren & strobe / 05 Waterproof case

Embuilded™
Embedded intelligence for the built world.

CONTACT
Freddie Leung
BD Manager
freddie.leung@embuilded.com
+852 9385 5543