
Device Specifications

Package Contents: Gateway ×1, Water Leak Sensor ×4, Valve Controller ×1

This system communicates using the Zigbee 3.0 protocol and requires a compatible Zigbee gateway for operation.

Gateway Specifications

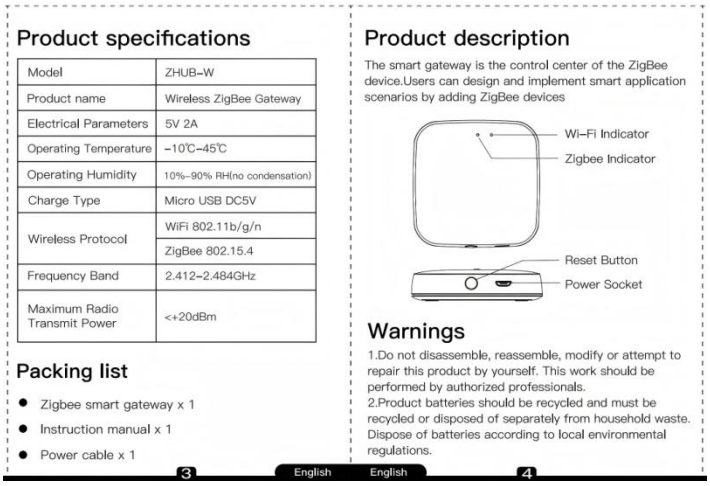

Product specifications

Model	ZHUB-W
Product name	Wireless ZigBee Gateway
Electrical Parameters	5V 2A
Operating Temperature	-10℃-45℃
Operating Humidity	10%-90% RH(no condensation)
Charge Type	Micro USB DC5V
Wireless Protocol	WiFi 802.11b/g/n
	ZigBee 802.15.4
Frequency Band	2.412-2.484GHz
Maximum Radio Transmit Power	<+20dBm

Packing list

- Zigbee smart gateway x 1
- Instruction manual x 1
- Power cable x 1

3 English

Product description

The smart gateway is the control center of the ZigBee device.Users can design and implement smart application scenarios by adding ZigBee devices

Wi-Fi Indicator
Zigbee Indicator
Reset Button
Power Socket


Warnings

1.Do not disassemble, reassemble, modify or attempt to repair this product by yourself. This work should be performed by authorized professionals.
2.Product batteries should be recycled and must be recycled or disposed of separately from household waste. Dispose of batteries according to local environmental regulations.

English 4

Water Leak Sensor Specifications

Power Supply: CR2032 Coin Cell Battery ×1 (Battery Not Included),"+" side facing UP.

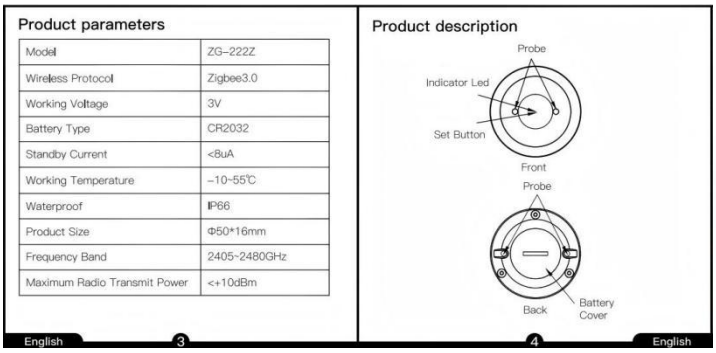

Product parameters

Model	ZG-222Z
Wireless Protocol	Zigbee3.0
Working Voltage	3V
Battery Type	CR2032
Standby Current	<8uA
Working Temperature	-10~55℃
Waterproof	IP66
Product Size	Φ50*16mm
Frequency Band	2405~2480GHz
Maximum Radio Transmit Power	<+10dBm

English 3

Product description

Probe
Indicator Led
Set Button
Front
Probe
Back
Battery Cover


4 English



Inside View (Battery Installed)

Valve Controller Specifications

Power Supply: AA Alkaline Batteries ×4 (Batteries Not Included)

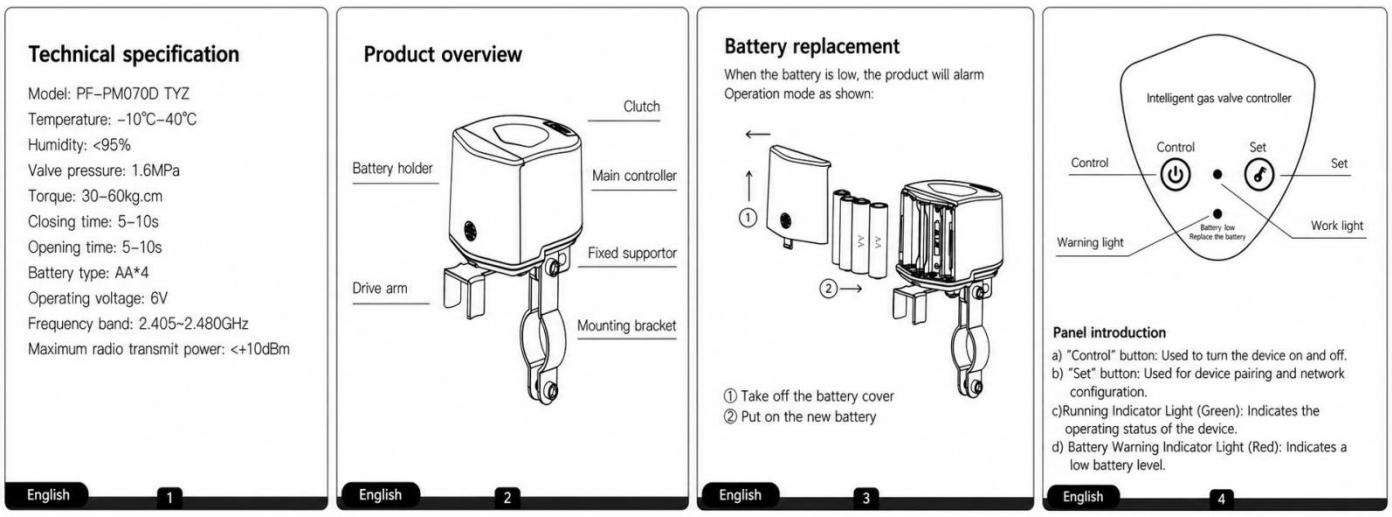

Technical specification

Model: PF-PM070D TYZ
Temperature: -10℃-40℃
Humidity: <95%
Valve pressure: 1.6MPa
Torque: 30-60kg.cm
Closing time: 5-10s
Opening time: 5-10s
Battery type: AA*4
Operating voltage: 6V
Frequency band: 2.405~2.480GHz
Maximum radio transmit power: <+10dBm

English 1

Product overview

Clutch
Battery holder
Main controller
Fixed supportor
Drive arm
Mounting bracket

English 2

Battery replacement

When the battery is low, the product will alarm
Operation mode as shown:

① Take off the battery cover
② Put on the new battery

English 3

Intelligent gas valve controller
Control
Control
Set
Set
Warning light
Battery low Replace the battery
Work light

Panel introduction

a) "Control" button: Used to turn the device on and off.
b) "Set" button: Used for device pairing and network configuration.
c)Running Indicator Light (Green): Indicates the operating status of the device.
d) Battery Warning Indicator Light (Red): Indicates a low battery level.

English 4

Estimated Battery Performance

The following test data is based on laboratory conditions and is provided for reference only. Actual battery life may vary depending on the battery brand, ambient temperature, valve resistance, and frequency of operation.

Four AA batteries provide a total capacity of approximately 2500 mAh. The following calculations are based on an average available capacity of 2000 mAh.


Based on an average current draw...

Under standby conditions, assuming an average current draw of 50 μA, the estimated standby time is approximately 40,000 hours (about 4.5 years).

Estimated Battery Life: Assuming one complete operating cycle per day, the Valve Controller is expected to operate for about 2.4 years.

Valve Controller Installation

Important: Before installation, complete device pairing and verify that all automation functions operate correctly. Install the Valve Controller only after confirming normal operation.

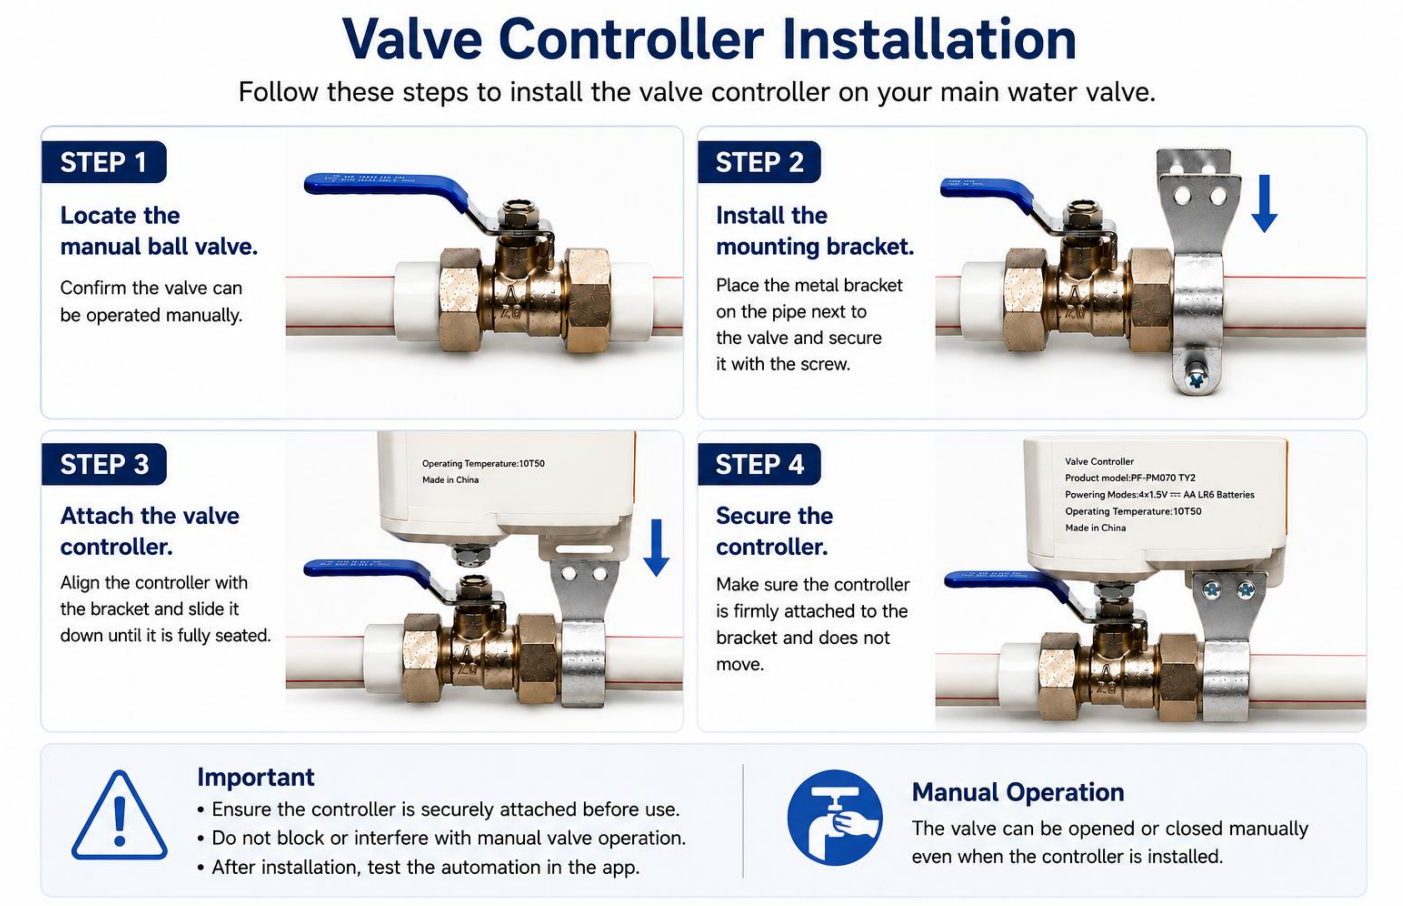

Need Help?

Email: hengrongbeimei@gmail.com

Contact us at the email address above to activate your 6-Year Extended Warranty.

Note: The warranty does not cover damage caused by misuse, abuse, accidents, unauthorized modifications, or normal wear and tear.

Rev. 1.0 07/2026