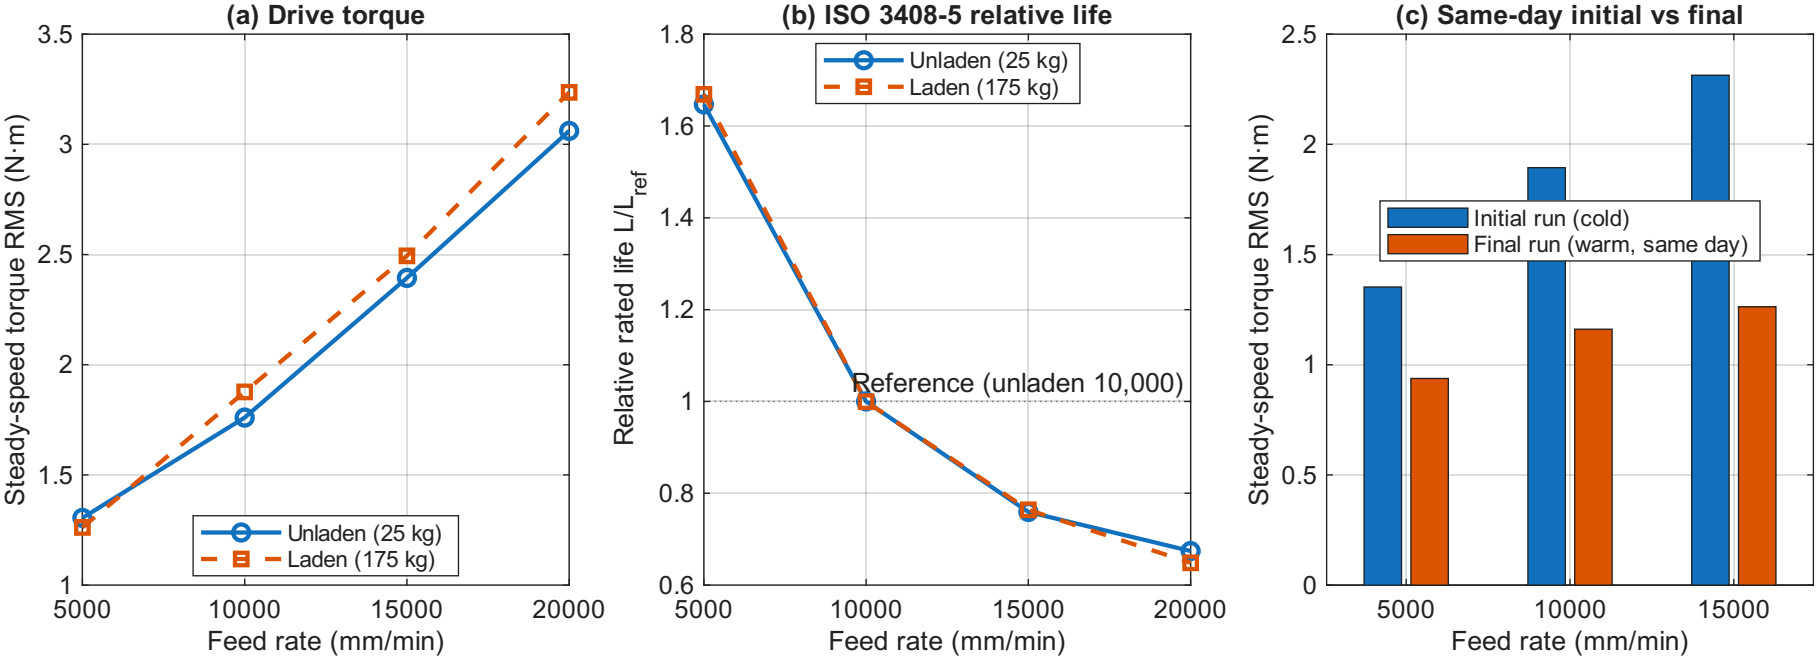
(a) Drive torque
Steady-speed torque RMS (N·m)
Feed rate (mm/min)
Unladen (25 kg)
Laden (175 kg)
(b) ISO 3408-5 relative life
Relative rated life L/L_ref
Reference (unladen 10,000)
(c) Same-day initial vs final
Initial run (cold)
Final run (warm, same day)