

Continuous track fire monitor

Manufacturer: Holland Special Pumps bv
 Model: CFM-03 MkIII
 Ident. no: 24/XX CFM-03 XX XXX
 Serial no: HSP-240XX
 Year of man: XX-2024
 Drive: Electric (deep cycle)
 Operation: Remote control
 live audio & video (4G-5G)
 Service weight: 500 kg
 Prot. class IP65



Cameras
 2X) IP Camera HD
 View angle 130°
 Resolution 2,1MP
 Night vision 20m

3X) IP Camera HD
 Resolution 4MP
 View angle 84°
 Range -20°C to 150°C
 Therm. 160x120
 View angle 50°
 Night vision 15m

2X) IP Camera HD (Gasdet.)
 View angle 110°
 Resolution 2,1MP
 LED background lighting

Monitor 2 1/2"
 Elkhart Brass
 Sidewinder EXM2
 Water & Foam
 Range of jet. 70m

Nozzle
 Elkhart Brass
 X-stream SM-1000E
 Adj. spray-jet pattern

Dimensions
 Length 1550 mm
 Width 750 mm
 Height 1050 mm
 Gradeability max:
 Longitudinal 30°
 Transverse 10°
 Center of gravity:
 X- +411 mm
 Y- +328 mm
 Z- +10 mm
 Ground clearance 90 mm
 Sound level dB(A)²


LED Robot Lighting
 6x) Vehicle spotlight
 4x) Nav. lights R/G/W/W

Options
 2x) Linelaser guidance module
 2x) Multi-purp. magnet holder
 2x) Gas monitoring
 2x) Robot inclination sensor
 Side bumpers
 Hose coupling carrier
 Tow hitch



Remote control
 863-870 MHz 25mW
 Range³ 200m
 Comm. Semi-duplex
 Prot. class IP65
 3" B&W

Live video (4G)
 10,9" Touchscreen
 Res. 2300x1440 WUXGA

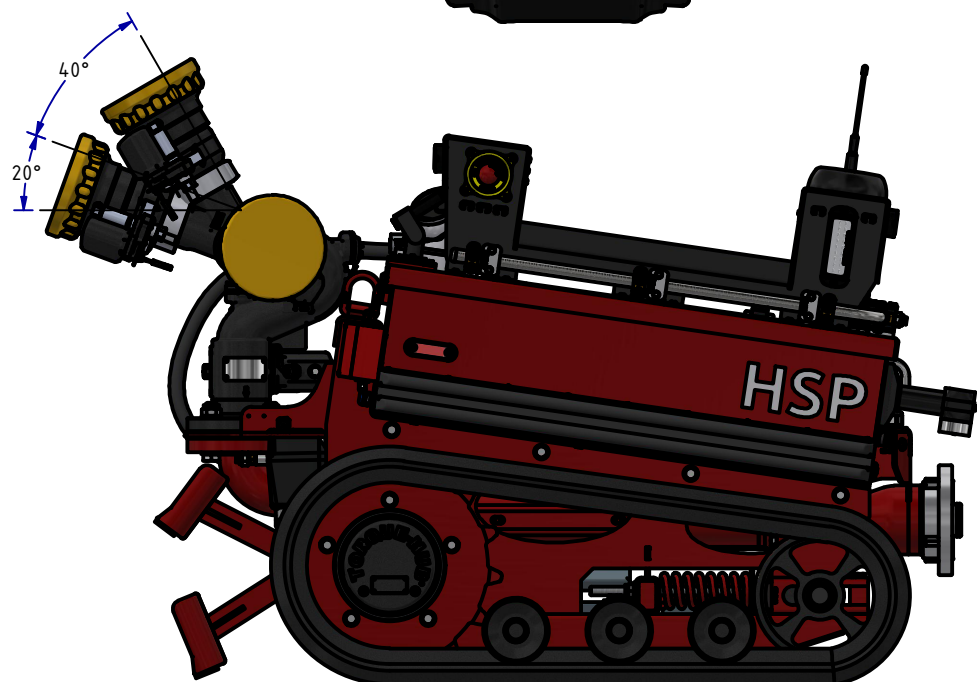

Electrical system
 Deep-cycle traction batt.
 Capacity 72Vdc - 36Ah
 Power conn. DEFA 230Vac
 Build in batt. charger 10/12A

Crawler (150x33x72)
 Trackwidth. 150mm
 Ground press. 0.73kg/cm²
 Max travel speed. 6 km/h
 Max drawbar pull 3,7kN

Water supply & connections
 Self prot. GEKA 1/2" (N.A. 40mm)
 Qmax 25l/min - Pmax 12Bar
 Main supply DSP 4" AR-110
 Qmax. 2800L/min - Pmax 12Bar

- Operation only by authorized and trained persons
- Read the user manual before use
- It is not permitted to use manual and radio control simultaneously
- It's strictly forbidden to transport persons

¹ - Measured from marking point A (sprocket center)

² - Measured at 15m behind vehicle, height 1m

³ - Based at open field conditions