Vortex reciprocal repair: normal accuracy preserved, underflow fixed

Each curve covers 1024 bins × 8192 inputs; both signs follow from proved sign symmetry

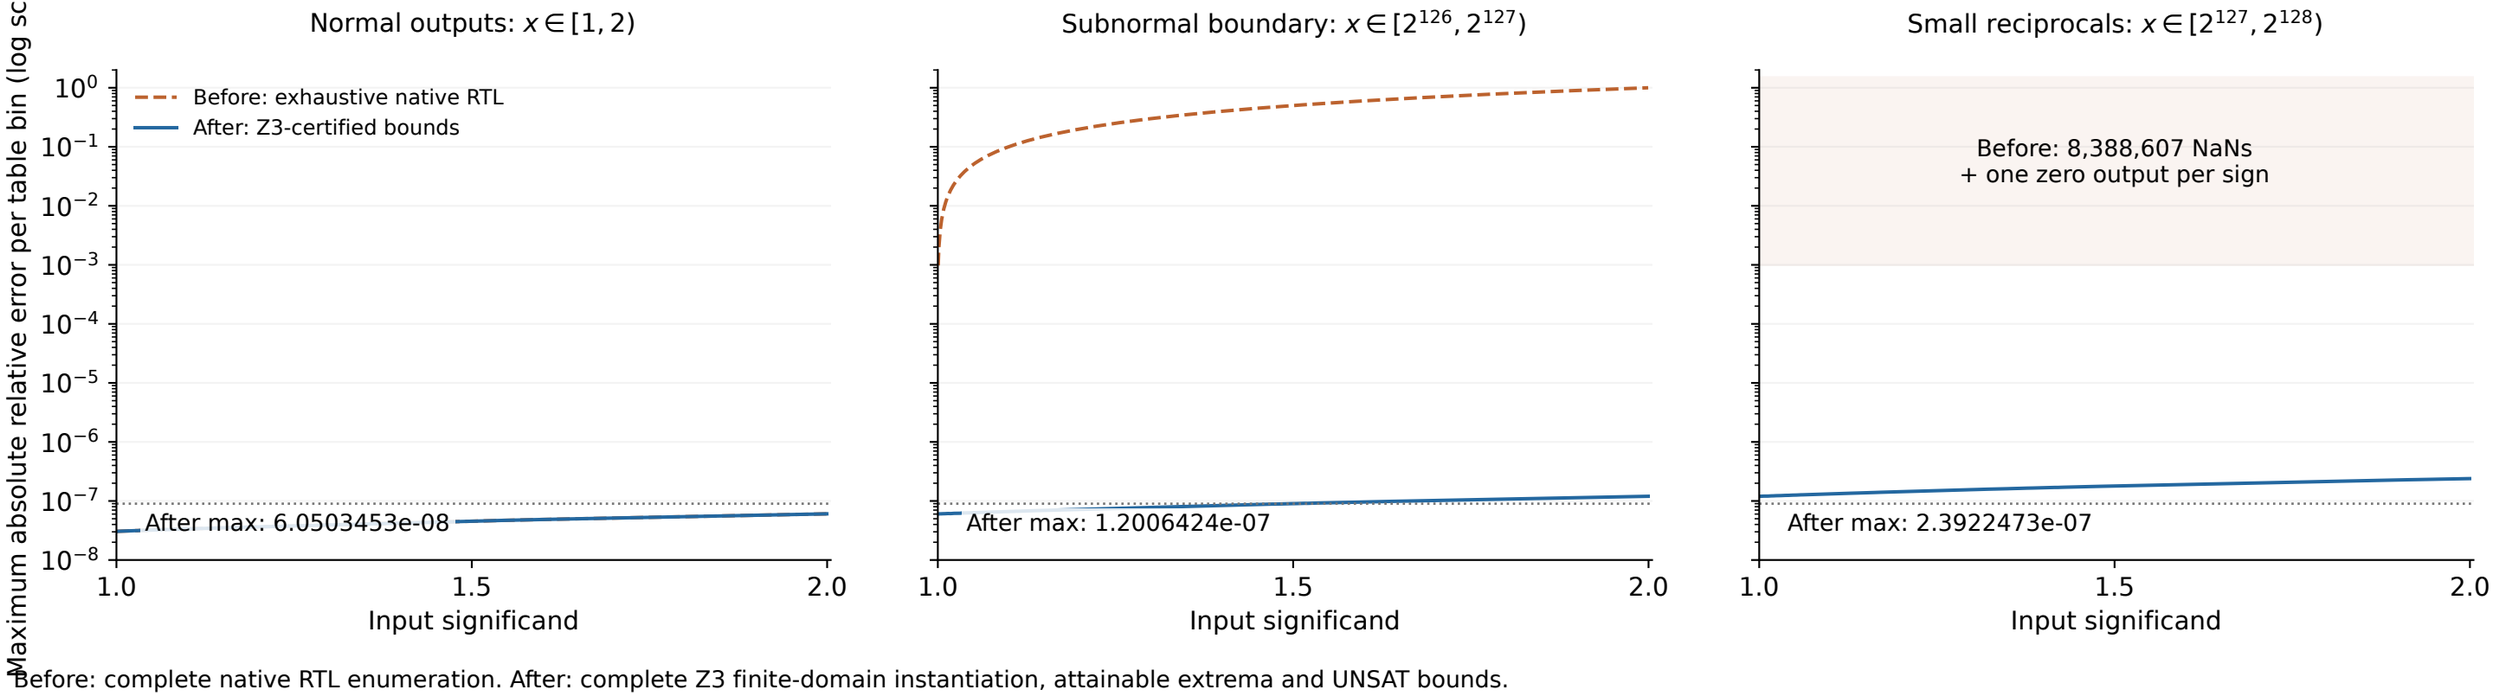

Before: complete native RTL enumeration. After: complete Z3 finite-domain instantiation, attainable extrema and UNSAT bounds.

Dotted line: the previous normal-core 9e-8 target. Normal outputs are bit-identical; subnormal relative precision is inherently coarser.