

USBBreakout-1.3

not saved!

Sheet: 1/2

1

2

3

4

5

6

A

A

B


B

C



C

D

D

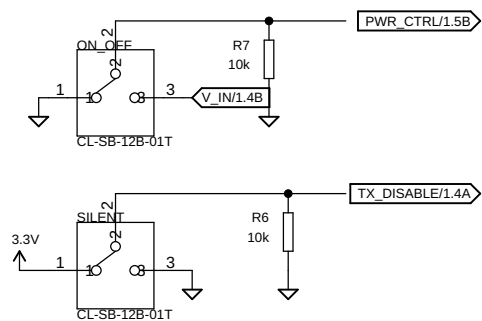

Status signals from the transponder  
are 30V tolerant open drain outputs with 100Ohm  
current limiting resistors

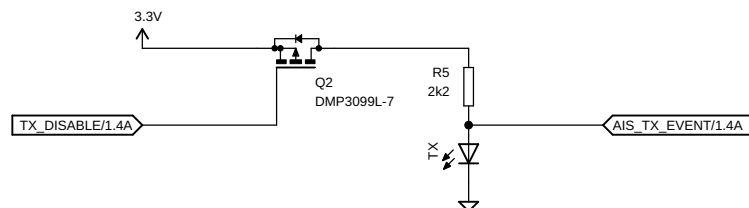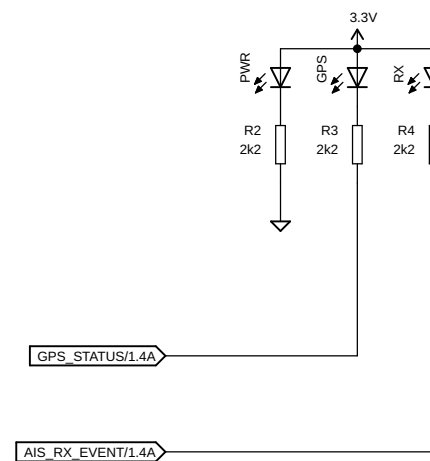

USBBreakout-1.3

not saved!

Sheet: 2/2