
vault

Sustainers Assembly 1/7

#ussadesign

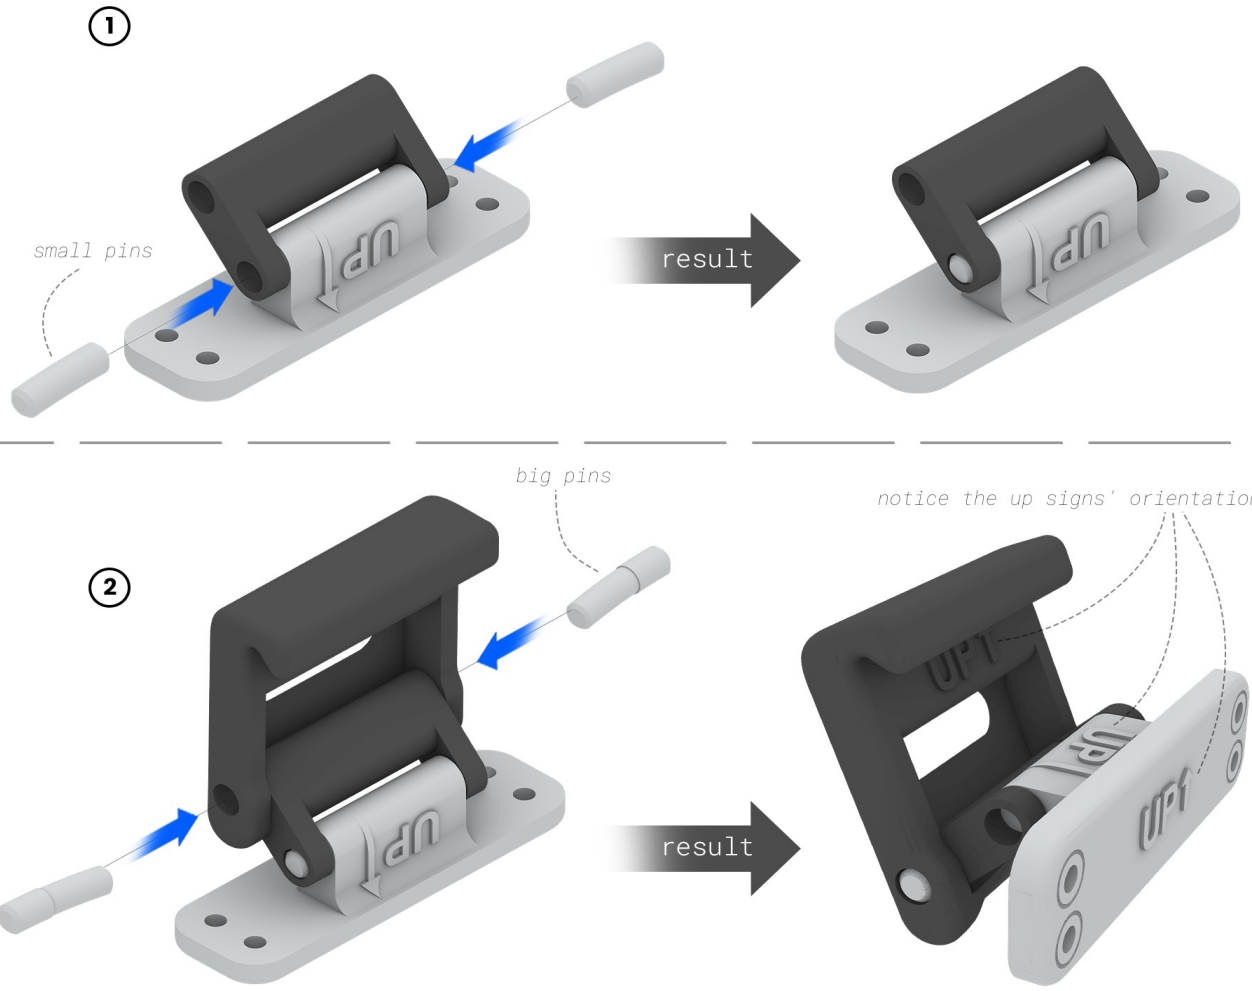

1. attach "lock inner part" to the "lock holder", by inserting small pins
2. attach "lock outer part" to "lock inner part", by inserting big pins

·· 1

····· (Dual Latches)


·· ·····

·· ·····

vault

Sustainers Assembly 2/7

#ussadesign

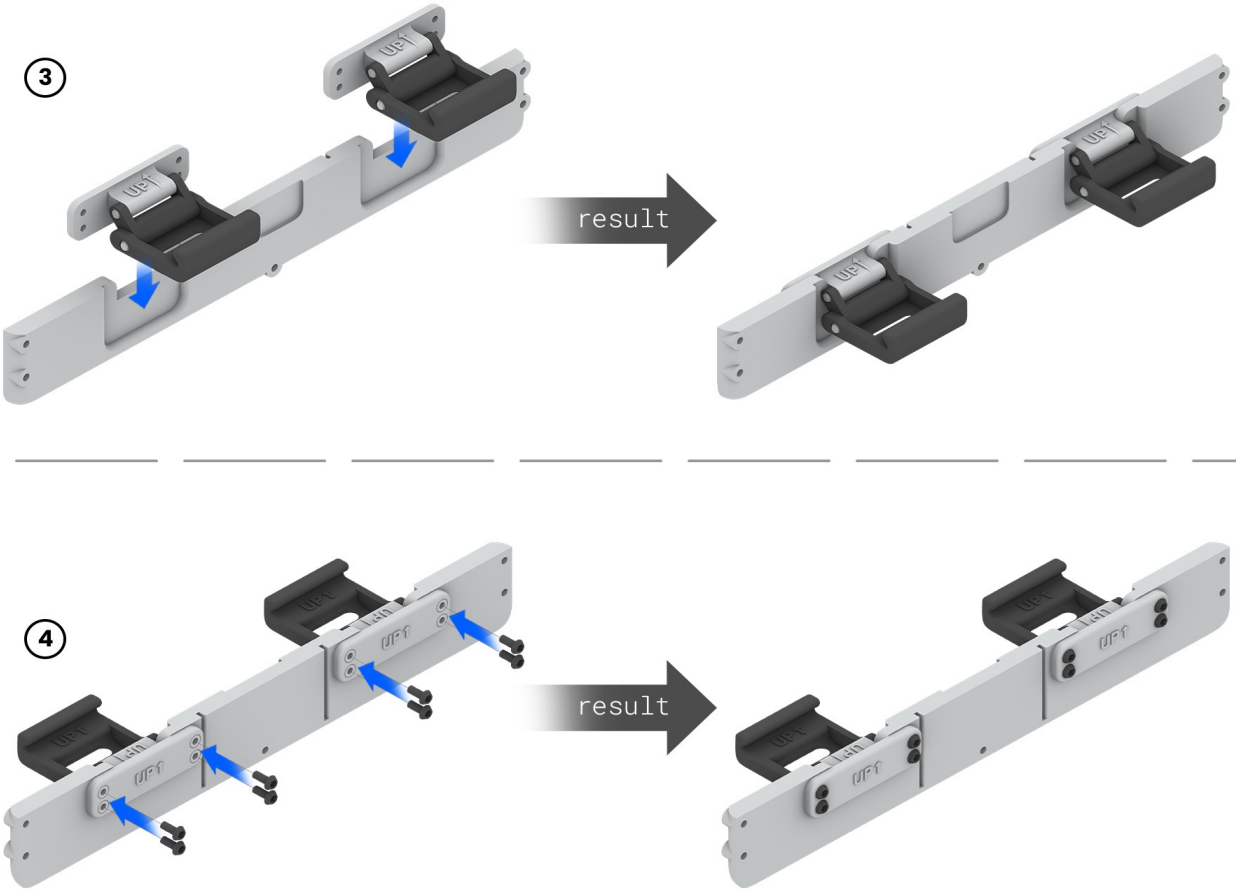

3. fix lock on a facade with “up” sign looking up
4. use M4 14MM bolts to fix it

·· 2

·····


·· ·····

·· ·····

vault

Sustainers Assembly 3/7

#ussadesign

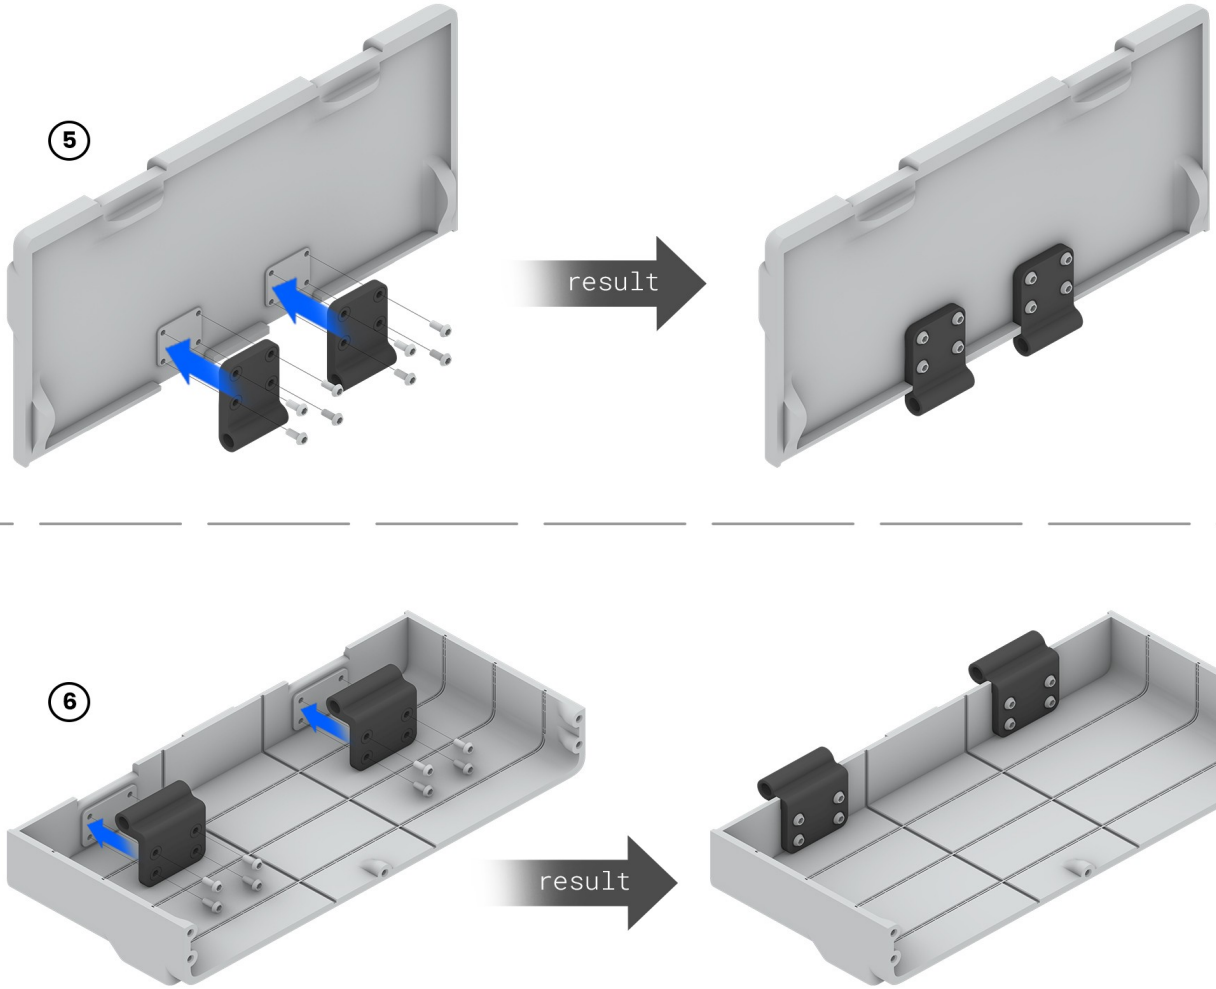

5. use M4 14MM bolts to fix Top Hinge on a roof
6. use M4 10MM bolts to fix Bottom Hinge on a module

·· 3 ·····


·· ·····

·· ·····

vault

Sustainers Assembly 4/7

#ussadesign

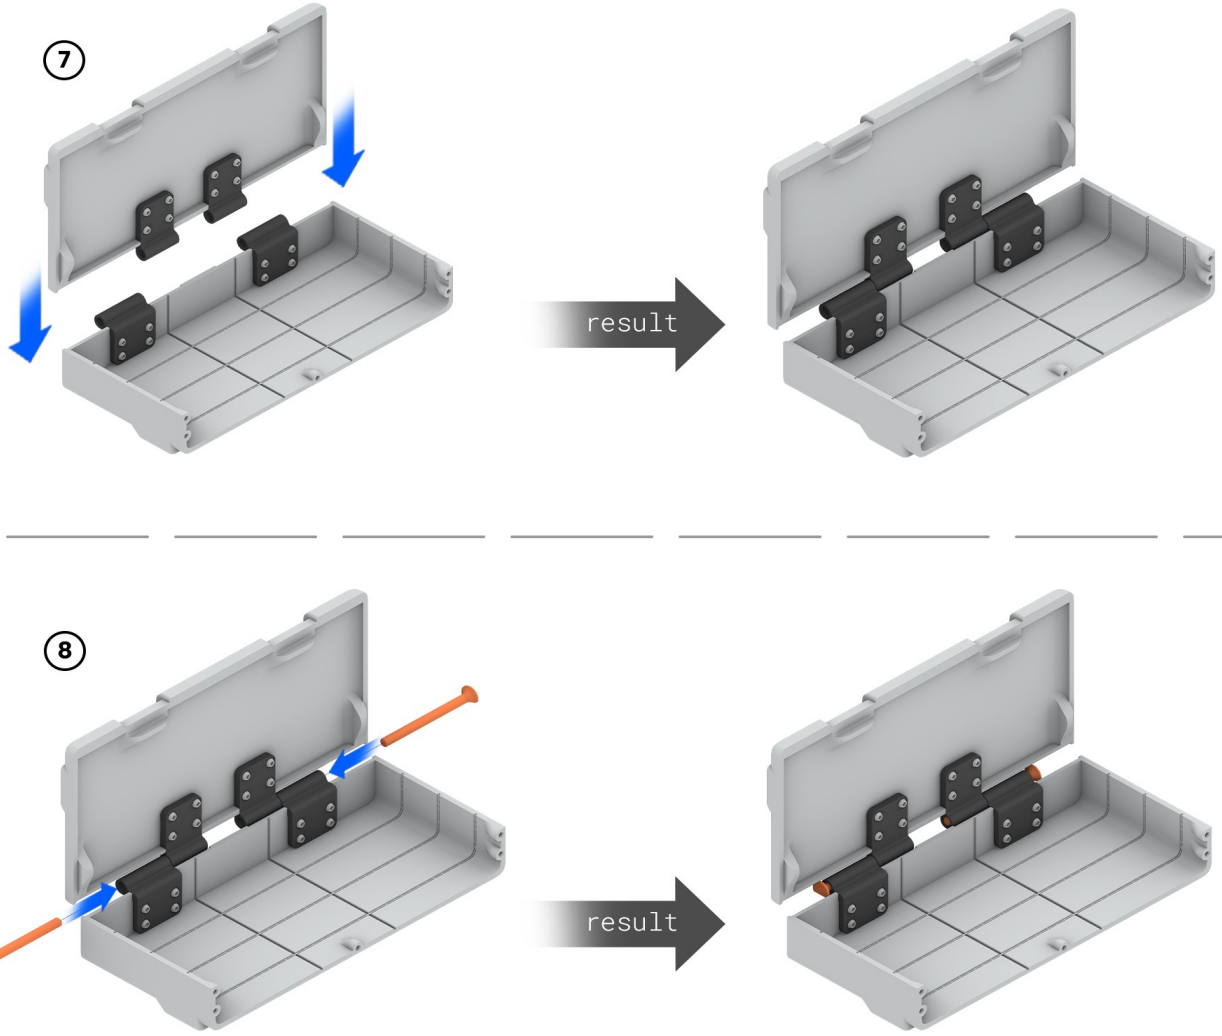

7. connect roof and module of a sustainer
8. fix them together with two rods

·· 4 ·····


·· ·····

·· ·····

vault

Sustainers Assembly 5/7

#ussadesign

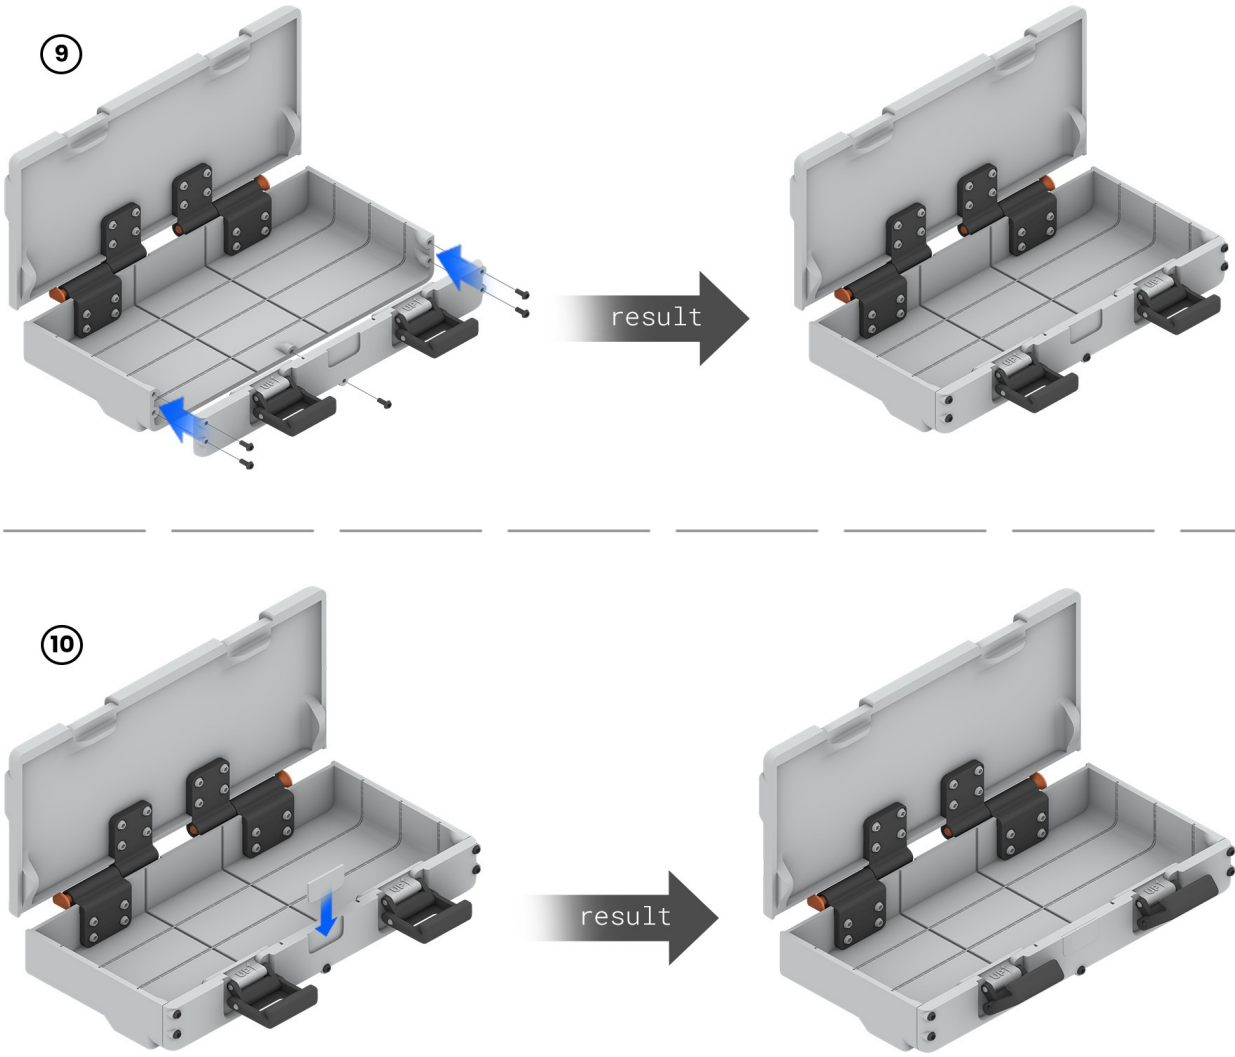

9. fix previously assembled facade, to a module with M4 20MM bolts
10. slide in a label

·· 5 ·····


·· ·····

·· ·····

vault

Sustainers Assembly 6/7

#ussadesign

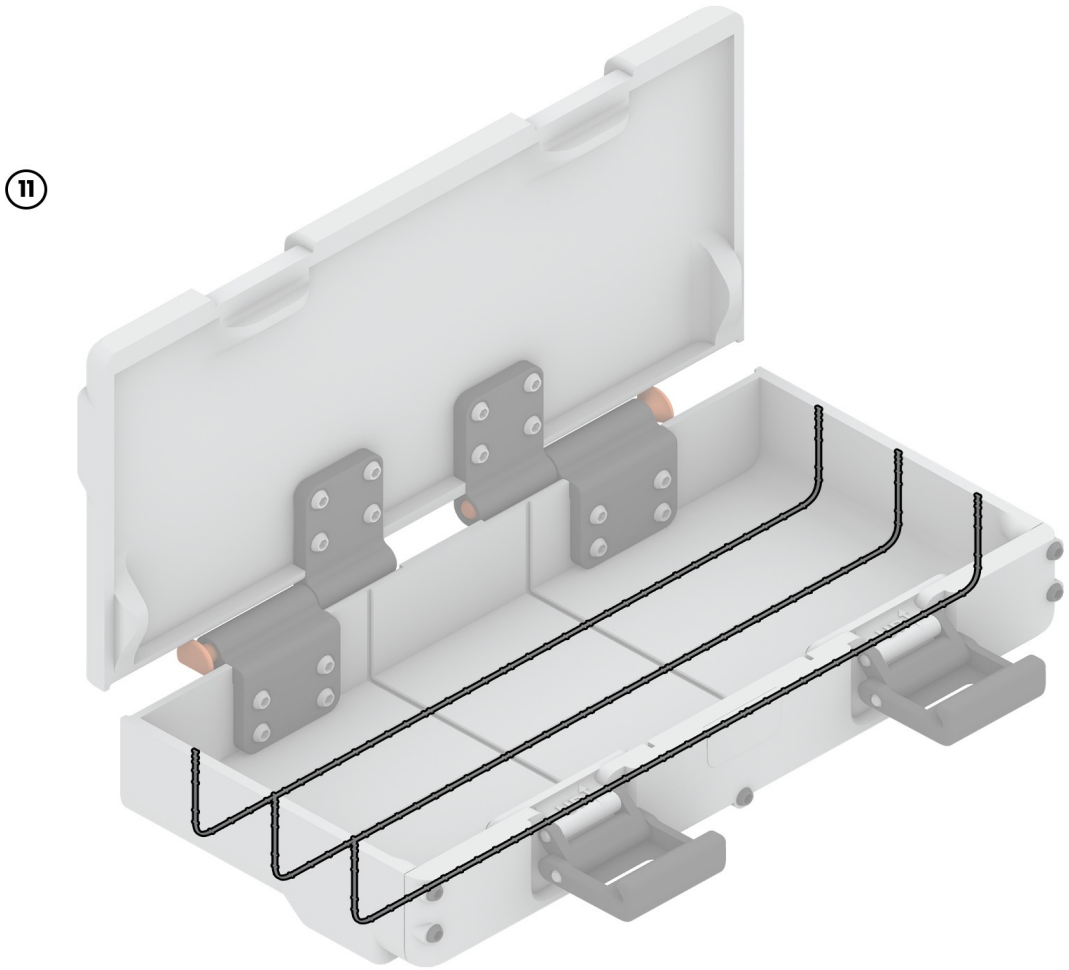

11. remove manual supports, before filling it with dividers

·· 6 ·····


·· ·····

·· ·····

vault

Sustainers Assembly 7/7

#ussadesign

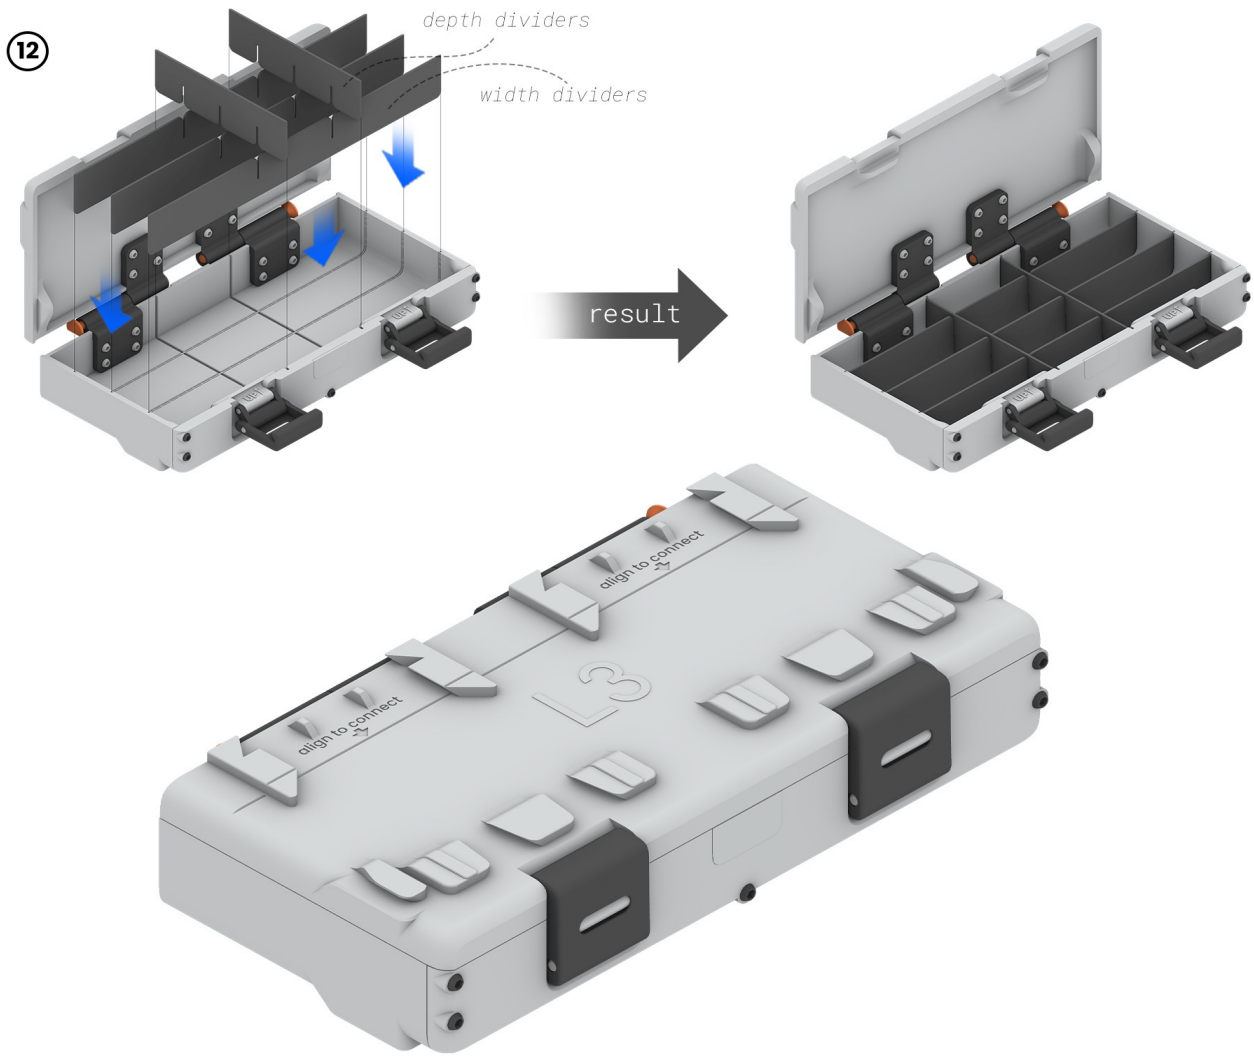

12. insert dividers, the way you need

·· 7

·· Gridfinity ·····

·· ·····

·· ·····