

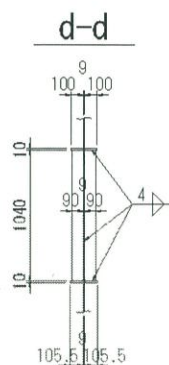
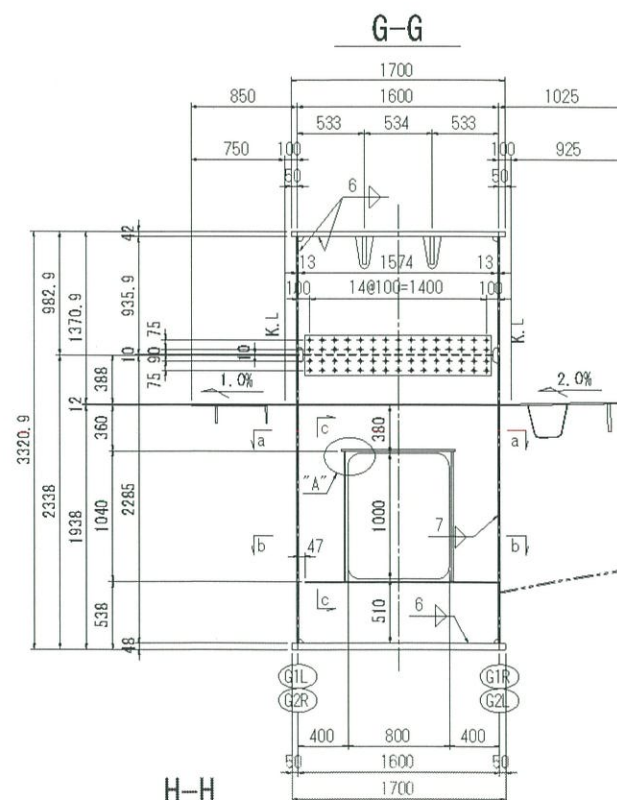




A-A

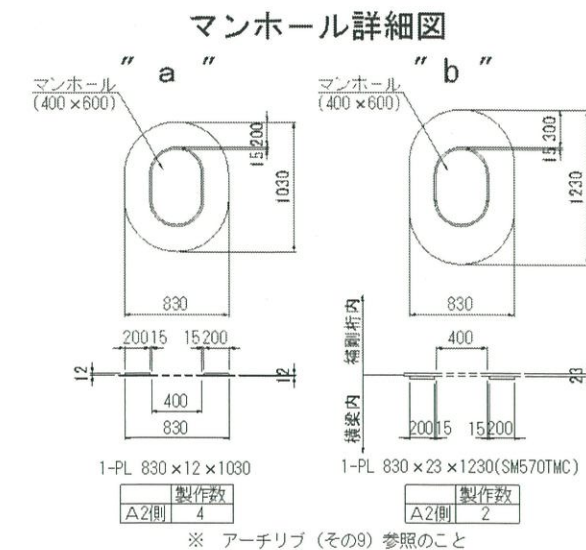

1-DIA PL 1574x9x1183 (SM490YA)
1-DIA PL 1574x9x1063 (SM490YA)
1-DIA PL 1574x9x936 (SM490YA)
3-DIA PL 1574x9x2285 (SM490YA)
8-PL 100x10x900
12-PL 90x10x1040
8-SPL PL 1480x9x320 (SM490YA)
180-TCB M22x85 (S10T)




2-PL 891x10x1527 (SM490YA)
2-PL 106x10x1237

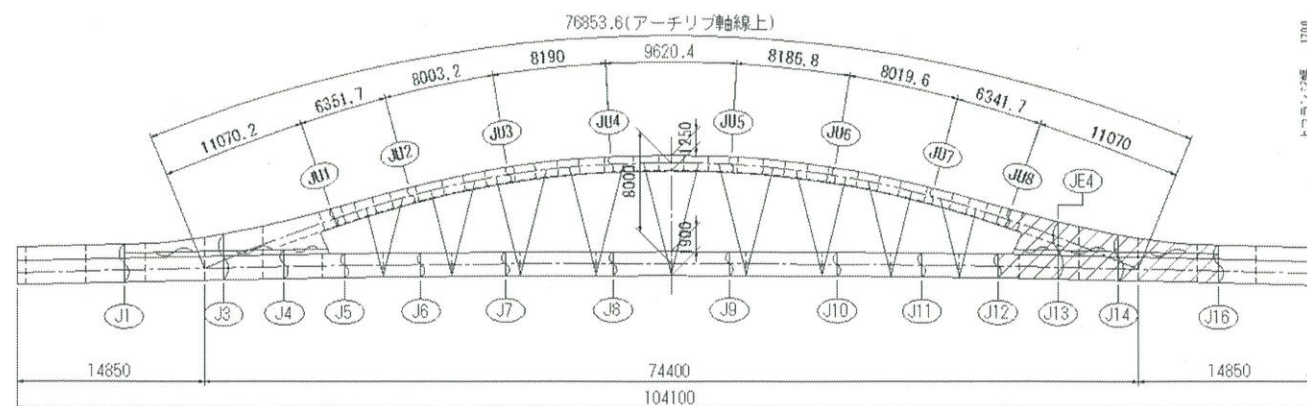

配置图 S=1:300

* ボルト孔を全て26.5φとする。

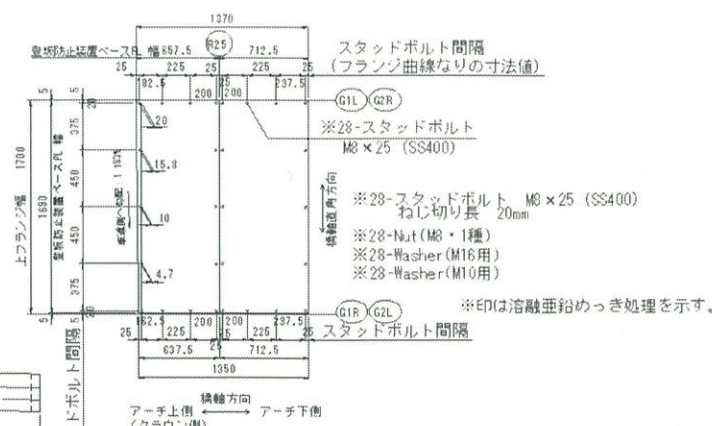

注)
1. 特記なき材質は全てSM400Aとする。
2. 特記なきスカラーップは全て35Rとする。
3. + EDはトルシア形高力ボルトM22 (S10T) を示す。