



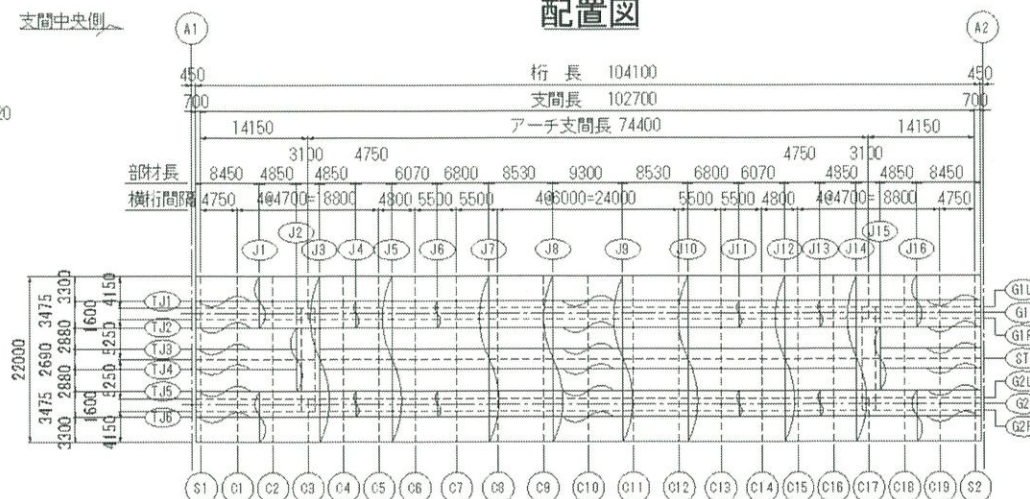


◎ C1 ~ ◎ C19 部



	tw	t1	L1
C1	18	8	1584
C2~C5	23	13	1574
G6, C7	18	8	1584
G8~C12	16	6	1588
C13, C14	18	8	1584
C15~C18	23	13	1574
C19	18	8	1584



注)
1. 特記なき材質は全てSM400Aとする。
2. 特記なきスカラーアップは全て35Rとする。
3. +印はトルシア形高力ボルトM22 (S10T)を示す。
4. 承架物の取付寸法及び補強板詳細は別図を参照のこと。