



ケーブル図

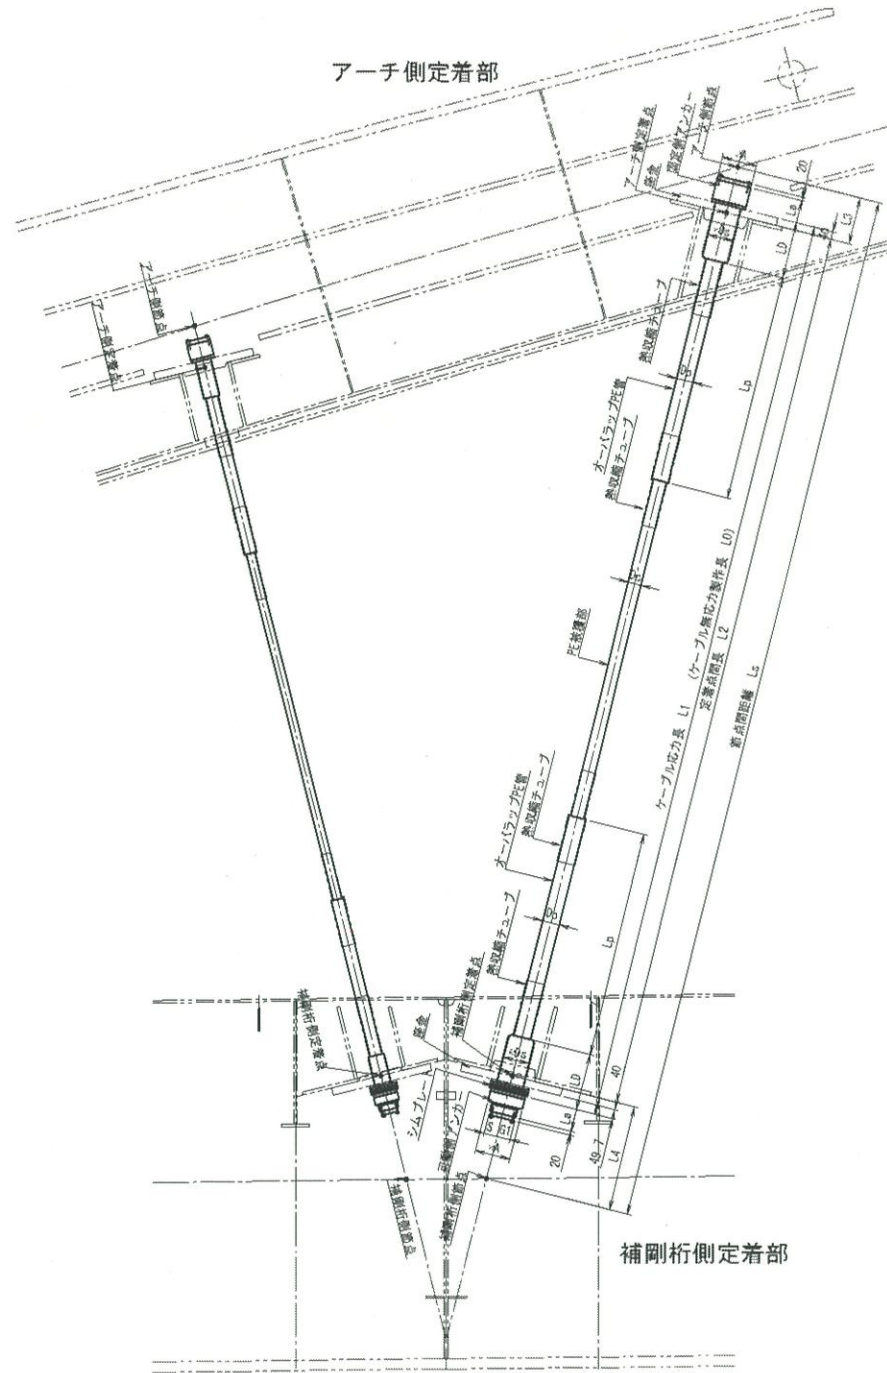


ケーブル図 S=1:20

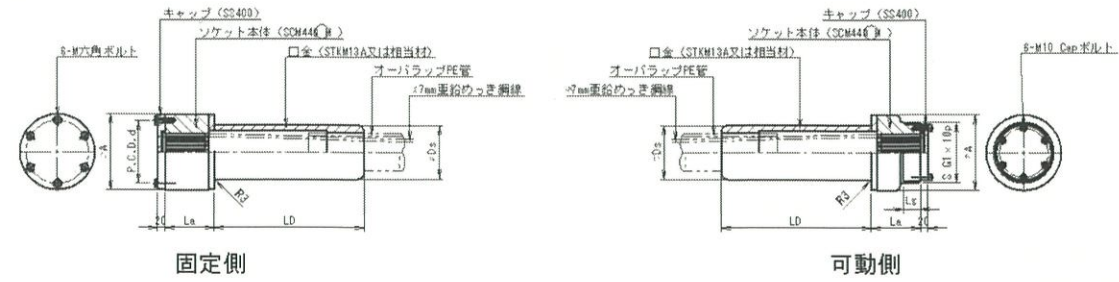

鋼線本数 7×	φA (mm)	L _a (mm)	G1 (mm)	L _g (mm)	φDs (mm)	L _D (mm)	d (mm)	M
19	130	95	105	30	84	200	104	M10
55	185	120	140	40	137	300	154	M12
73	200	130	160	45	144	400	167	M12

ソケット詳細図 S=1:10



鋼線本数 7×	G1 (mm)	G2 (mm)	数量 (組)
19	94	150	4
55	147	205	20
73	154	220	12


シムプレート詳細図 S=1:10

ケーブル寸法表

ケーブル 番号	鋼線本数 7×n (本)	Dc (mm)	Dp (mm)	Lp (mm)	ケーブル 数量 (本)	死荷重張力 (PSあり) (kN)	節点間長 L _s (m)	L4 (m)	L3 (m)	定着点間長 L2 (m)	ケーブル応力長 L1 (m)	弾性伸び (mm)	ケーブル製作長 L0 (m)
1	19	45	65	850	2	224.01	4.850	0.585	0.226	3.859	3.989	0.0062	3.982
2	55	70	90	1150	2	245.96	5.514	0.560	0.248	4.706	4.836	0.0029	4.833
3	55	70	90	1150	2	306.11	6.084	0.568	0.232	5.268	5.395	0.0040	5.391
4	73	80	100	1200	2	569.94	6.884	0.561	0.234	6.069	6.198	0.0069	6.192
5	55	70	90	1150	2	382.12	7.140	0.585	0.224	6.351	6.481	0.0060	6.475
6	73	80	100	1200	2	576.39	7.730	0.582	0.235	6.833	7.063	0.0074	7.055
7	55	70	90	1150	2	395.88	7.894	0.584	0.230	7.100	7.230	0.0069	7.223
8	73	80	100	1200	2	476.31	8.179	0.583	0.232	7.384	7.513	0.0065	7.507
9	55	70	90	1150	2	372.21	8.221	0.582	0.231	7.428	7.558	0.0068	7.551
10	55	70	90	1150	2	384.47	8.219	0.583	0.231	7.425	7.555	0.0068	7.548
11	73	80	100	1200	2	492.08	8.179	0.583	0.232	7.384	7.514	0.0067	7.507
12	55	70	90	1150	2	386.75	7.878	0.584	0.230	7.085	7.214	0.0067	7.208
13	73	80	100	1200	2	589.75	7.713	0.582	0.236	6.915	7.045	0.0075	7.037
14	55	70	90	1150	2	387.55	7.111	0.585	0.225	6.321	6.450	0.0057	6.445
15	73	80	100	1200	2	580.14	6.833	0.581	0.234	6.038	6.168	0.0063	6.162
16	55	70	90	1150	2	291.80	6.032	0.586	0.232	5.234	5.364	0.0038	5.360
17	55	70	90	1150	2	240.24	5.405	0.559	0.248	4.678	4.807	0.0028	4.805
18	19	45	65	850	2	221.51	4.627	0.585	0.226	3.836	3.966	0.0061	3.960

ケーブル仕様 S=1:2

	SPWC 73	SPWC 55	SPWC 19
断面仕様			
公称断面積	2 810 mm ²	2 120 mm ²	731 mm ²
破断荷重	4 410 kN	3 320 kN	1 150 kN
弾性係数	196 kN/mm ²	196 kN/mm ²	196 kN/mm ²
ケーブル重量	24.1 kg/m	18.2 kg/m	6.5 kg/m

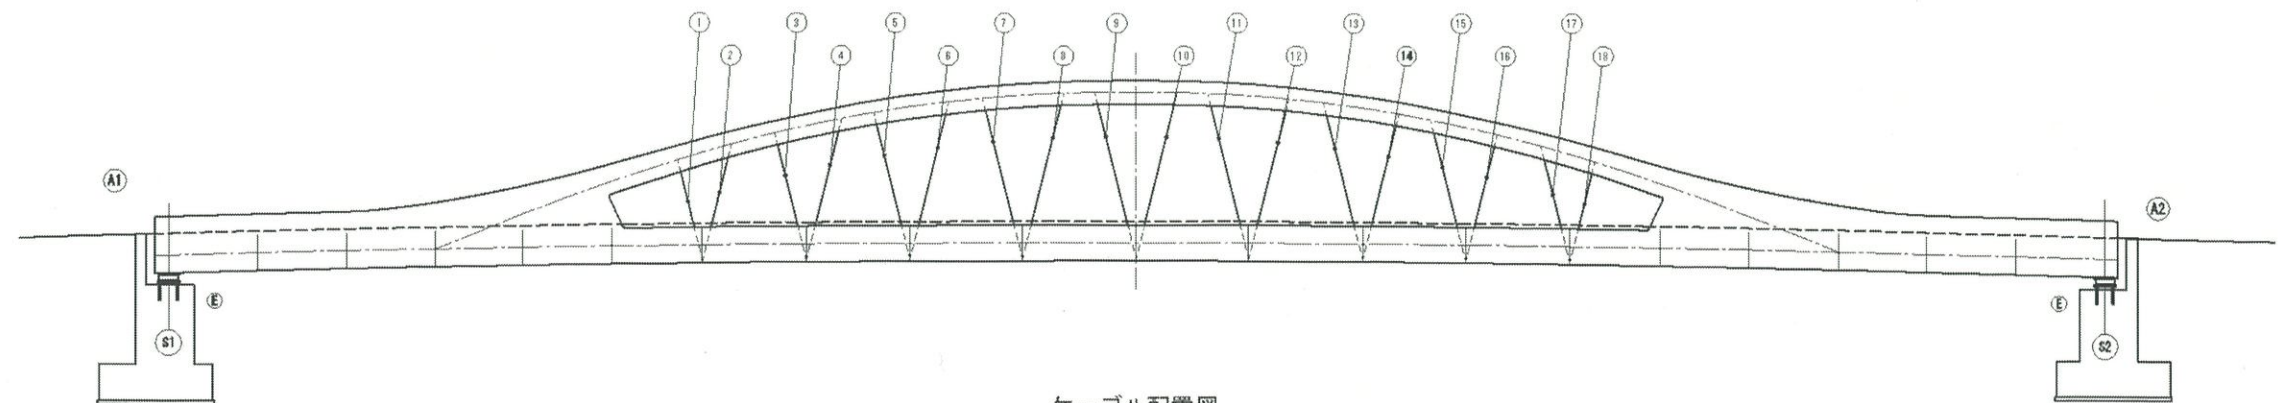

ケーブル配置図