




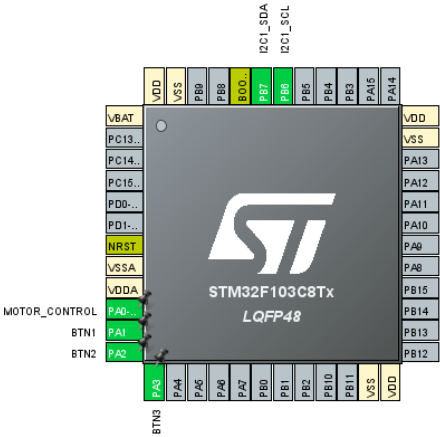

Pinout & Configuration

Clock Configuration

▼ Software Packs



Categories

A->Z

System Core >

Analog >

Timers >

RTC

TIM1

TIM2

☒ TIM3☐ TIM4

Connectivity >

CAN

☒ I2C1

I2C2

SPI1

SPI2

USART1

☒ USART2

USART3

USB

Computing >

Middleware and Software Packs >

TIM3 Mode and Configuration

Mode

Slave Mode Trigger Source ☒ Internal ClockChannel1 Channel2 Channel3 Channel4 Combined Channels ☐ XOR activation☐ One Pulse Mode

Configuration

Reset Configuration

☒ NVIC Settings☒ DMA Settings☒ Parameter Settings☒ User Constants

Configure the below parameters :



▼ Counter Settings

Prescaler (P... 7999

Counter Mode Up

Counter Peri... 4999

Internal Cloc... No Division

auto-reload p... Disable

▼ Trigger Output (TRG...

Master/Slave... Disable (Trigger input ef...

Trigger Event... Reset (UG bit from TIM...



Pinout & Configuration

Clock Configuration

Software Packs



Categories

A->Z

System Core



Analog



Timers



RTC

TIM1

TIM2

✓ TIM3

⚠ TIM4

Connectivity



CAN

✓ I2C1

I2C2

SPI1

SPI2

USART1

⊗ USART2

USART3

USB

Computing



Middleware and Software Packs



I2C1 Mode and Configuration

Mode

I2C

I2C



Configuration

Reset Configuration

✓ GPIO Settings

✓ NVIC Settings

✓ DMA Settings

✓ Parameter Settings

✓ User Constants

Configure the below parameters :



Master Features

I2C Speed M... Standard Mode

I2C Clock Sp... 100000

Slave Features

Clock No Str... Disabled

Primary Addr... 7-bit

Dual Address... Disabled

Primary slav... 0

General Call ... Disabled



Pinout & Configuration

Clock Configuration

▼ Software Packs

TIM3 Mode and Configuration

Mode

Slave Mode

Trigger Source

☒ Internal Clock

Channel1

Channel2

Channel3

Channel4

Combined Channels

☐ XOR activation

☐ One Pulse Mode

Configuration

Reset Configuration

☒ NVIC Settings

☒ DMA Settings

☒ Parameter Settings

☒ User Constants

NVIC Interrupt Table

Enabled

Preemption

TIM3 global interrupt

☒

0

Categories

A->Z

System Core

Analog

Timers

RTC

TIM1

TIM2

☒ TIM3

☐ TIM4

Connectivity

CAN

☒ I2C1

I2C2

SPI1

SPI2

USART1

☒ USART2

USART3

USB

Computing

Middleware and Software Packs