Shenzhen HBOIOT Co., Ltd.

Add:14th Floor,Block A,West Area,Tanglang Town Plaza,AV Liuxian 3333,Nanshan,Shenzhen,
Guangdong,China,ZIP code:518071
Tel:+86 180 2766 2494
Email:info@HBOIOT.com
URL:www.hboiot.com

Copyright:Shenzhen HBOIOT Co., Ltd.

MAKE YOUR TRAVELING SAFE AND CONVENIENT!

HBO IOT

MAKE YOUR TRAVELING SAFE AND CONVENIENT

CONTENTS

Company Profile

Company Introduction 01
Qualification Honor 02

Product Series

GPS-E-Lock

HB-A1SP 03
HB-A1M 05
HB-A1Ms 07

Video Telematics

HB-T6 09
HB-T8(720P) 11
HB-HB-T8(1080P) 13
HB-VT08 15

Speed Limiter

HB-A3B 17

GPS Tracker

HB-A5D 19
HB-A5M 21
HB-A1T 23
HB-A9S 25

Digital Tachograph

HB-R03 27

Solution

Customs Electronic Cargo Tracking System 29
Oil & Gasoline Transportation Safety Solution 30

COMPANY INTRODUCTION

Shenzhen HBOIOT Co., Ltd (hereinafter referred as HBOIOT), is the professional IoV solution provider, aiming to provide the cost-effective intelligent hardware & software, customized platform, and high-quality services. We take the technology application as the core, like the artificial intelligence, satellite navigation, and the new generation of information and communication technologies, and revolve the necessary IoV processes ranging from data collection, decision-making, execution to networking.

We have an own factory of about 4000 square meters, used to produce our products and provide OEM&ODM services. The capacity of production exceeds 1,400,000 pcs/year. At the same time, we cooperate with car manufacturers, provide high-quality device and offered device's before-assembly market installation service.

Our overseas markets are growing rapidly, currently our business already covered Southeast Asia, South America, Africa, Middle east etc. We get praise from customers through service and quality and reached cooperation with local governments and distributors in some countries.

Philosophy *"Make your Traveling Safe and Convenient"*

QUALIFICATION HONOR

AMBITION/REPUTATION/MORE MARKET

HB-A1SP

4G Solar Electronic Lock

- Super long standby
- RFID id card unlocking
- Bluetooth APP unlocking
- 4G remote unlocking
- Multi-lock cascade operation
- IP67 waterproof
- Intelligent alarm
- Explosion-proof shell
- Solar charging(optional)

USE CASES

- Container
- Tanker
- Logistics vehicle
- Safe box

HBO IOT

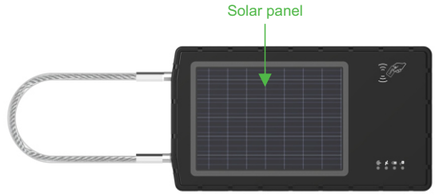

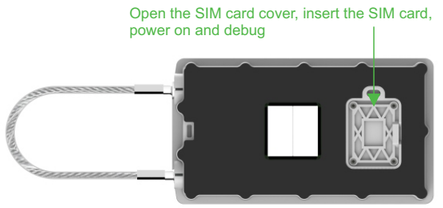

Function		HB-A1SP	
Physical specification	Dimensions	209*115*51mm (L x W x H)	
	Chain length	300mm	
	Weight	1150g	
	Shell material	Flame retardant PC	
	Lock rod seal resistance	>1000kg	
	Degree of protection	IP 67	
GNSS	GNSS	GPS, BEI DOU,	
	Receiver	64 channel	
	Tracking sensitivity	- 162 dBM	
	Accuracy	< 10 m	
	Hot start	< 1 s	
	Warm start	< 5 s	
	Cold start	< 32s	
Communication	Technology	LTE FDD/ WCDMA/ GSM	
	Band	European	LTE FDD: B1/3/5/7/8/20/28
			LTE TDD: B38/40/41
			WCDMA: B1/5/8
			GSM/EDGE: B3/8
		South America	LTE FDD: B1/2/3/4/5/7/8/28/66
			LTE TDD: B40
			WCDMA: B1/2/4/5/8
			GSM/EDGE: B2/3/5/8
	Data support		TCP/ FTP/SMS (text/data)
Unlocking mode	RFID		RFID sensor range less than 2.5 cm
	Bluetooth	Bluetooth 4.0 BLE, Communication distance 20m	
	GPRS	No distance limit	
	SMS	No distance limit	
Power	Standby current	1.6mA	
	Operating current	80mA	
	Main battery	15200 mA h Li-Ion battery 3 .7 V (55 . 5 Wh)	
	USB charging voltage	5V DC@2A	
	Solar charging current	250mA/h	
	Charging time	10hours	
	Standby time (10 minutes per data)	31days(without solar charging)	
Operating environment	Operating temperature	-40 °C to +85 °C	
	Storage temperature	-40 °C to +85 °C	
	Battery charge temperature	-0 °C to +45 °C	
	Operating humidity	0% to 100% non-condensing	
	storage	NAND Flash 8MB;Dead zone data 3800 articles	
	Installation method	Magnet adsorption	
Certification & Approvals	Regulatory	CE, ATEX	

HB-A1M

4G Explosion Proof Electronic Lock

- Super long standby(20days)
- Small in size
- Light weight
- Multi-lock cascade operation
- IP67 waterproof
- Intelligent alarm
- Explosion-proof shell

USE CASES

Container　Tanker　Logistics vehicle　Safe box

HBO IOT

Function			HB-A1M
GNSS	GNSS		GPS, BEIDOU
	Acquisition		-147dBm
	Reacquisition		-159dBm
	Tracking sensitivity		-166dBm
	Accuracy		< 1.5 m
	Hot start		< 1 s
	Warm start		< 25 s
	Cold start		< 28 s
Communication	Band	European	LTE FDD: B1/3/5/7/8/20/28
			LTE TDD: B38/40/41
			WCDMA: B1/5/8
			GSM/EDGE: B3/8
		South America	LTE FDD: B1/2/3/4/5/7/8/28/66
			LTE TDD: B40
			WCDMA: B1/2/4/5/8
			GSM/EDGE: B2/3/5/8
	Data support		TCP/FTP/SMS (text/data)
Unlocking mode	RFID		RFID sensing distance 2.5cm
	Bluetooth		Bluetooth 4.0 BLE, Communication distance 20m
	GPRS		No distance limit
	SMS		No distance limit
Power	Main battery		8000 mAh Li-Ion battery 3.7 V (29.6 Wh)
	Charging voltage		5V DC@2A
	Charging time		6 hours
	Standby time (10 minutes per data)		22 days
Physical specification	Dimensions		124 x 95 x 47 mm (L x W x H)
	Chain length		300mm
	Weight		544 g
	Shell material		Flame retardant PC
	Lock rod seal resistance		1000Kg
Operating environment	Operating temperature		-30 °C to +70 °C
	Storage temperature		-40 °C to +85 °C
	Battery charge temperature		-0 °C to +45 °C
	Operating humidity		5% to 95% non-condensing
	Ingress protection rating		IP67
Certification & Approvals	Regulatory		CE, ATEX

HB-A1Ms

Explosion-proof sub-lock

- Super long standby(90days)
- Small in size
- Light weight
- IP67 waterproof
- Intelligent alarm
- Explosion-proof shell

USE CASES

- Container
- Tanker
- Logistics vehicle
- Safe box

HBO IOT

Function		HB-A1Ms
Unlocking mode	RFID	RFID sensing distance 2.5cm
	Bluetooth	Bluetooth 4.0 BLE, Communication distance 20m
Power	Main battery	2950 mAh Li-Ion battery 3.7 V (10.9 Wh)
	Charging voltage	5V DC@2A
	Charging time	3 hours
	Standby time (10 minutes per data)	3 months
Physical specification	Dimensions	124 x 95 x 47 mm (L x W x H)
	Chain length	300mm
	Weight	494 g
	Shell material	Flame retardant PC
	Lock rod seal resistance	1000Kg
Operating environment	Operating temperature	-30 °C to +70 °C
	Storage temperature	-40 °C to +85 °C
	Battery charge temperature	-0 °C to +45 °C
	Operating humidity	5% to 95% non-condensing
	Ingress protection rating	IP67
Certification & Approvals	Regulatory	CE, ATEX

HB-T6 Dashcam
2 Channels

- Video surveillance
- Dual-Channel Recording
- 1080P
- 4G LTE
- GPS/BDS
- I/O detection

USE CASES

- Container truck
- Truck
- Bus
- Taxi

HBO IOT

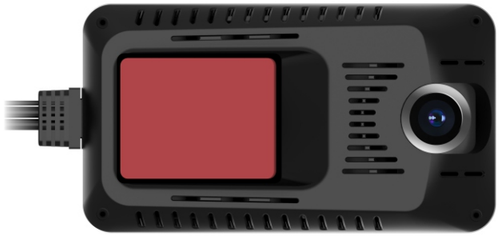

Function		HB-T6	
GNSS	GNSS	GPS, BEIDOU,	
	Receiver	Tracking: 64 acquisition channels	
	Tracking sensitivity	-165 dBM	
	Accuracy	< 3 m	
	Hot start	< 1 s	
	Warm start	< 25 s	
	Cold start	< 35 s	
Network	Standard	4G LTE cat1	
	WIFI	2.4Ghz	
	Bluetooth	BLE 4.0	
	Band	European	LTE FDD: B1/3/5/7/8/20/28
		South America	LTE FDD: B2/3/4/5/7/8/28/66
Camera	Front camera	1920*1080/25fps/f2.2/Full Color	
	Sub camera	1280*720/15FPS/F2.0/Full Color	
	Video format	.H264	
Power	Input voltage range	9 - 36 V DC with overvoltage protection	
	Working current	450mA	
	Dormant working current	60mA	
Physical specification	Dimensions	110 x 60 x 35mm (L x W x H)	
	Weight	180g	
Operating environment	Operating temperature(without battery)	-30 °C to +70 °C	
	Storage temperature (without battery)	-40 °C to +85 °C	
	Operating humidity	5% to 95% non-condensing	
	Ingress protection rating	IP54	
Interface	Digital Inputs	3	
	GNSS antenna	External antenna	
	SIM	1x SIM Card	
	Micro SD	1x Micro SD Card(Max. 512GB)	

HB-T8 Intelligent Dashcam
4 Channels

- Video surveillance
- 4-Channel
- 720P
- Driver status monitoring
- Advanced Driving Assistance System
- 4G LTE
- GPS/BDS

USE CASES

Container truck

Truck

Bus

Taxi

HBO IOT

Function			HB-T8
GNSS	GNSS		GPS, BEIDOU,
	Receiver		Tracking: 64 acquisition channels
	Tracking sensitivity		-165 dBM
	Accuracy		< 3 m
	Hot start		< 1 s
	Warm start		< 25 s
	Cold start		< 35 s
Network	Standard		4G LTE CAT4
	WIFI		2.4Ghz
	Band	European	LTE FDD: B1/3/5/7/8/20/28
			LTE TDD: B38/40/41
			WCDMA: B1/5/8
			GSM/EDGE: B3/8
		South America	LTE FDD: B1/2/3/4/5/7/8/28/66
			LTE TDD: B40
			WCDMA: B1/2/4/5/8
			GSM/EDGE: B2/3/5/8
Camera	Front camera		1280*720/25fps/F=1.8/FOV=106° /Full Color
	Dsm camera		1280*720/25fps/F2.0/FOV=72° /Monochrome
	Sub camera		1280*720/25fps/F2.5/FOV=118° /Full Color
Power	Input voltage range		9 - 36 V DC with overvoltage protection
	Working current		450mA
	Dormant Working current		60mA
Physical specification	Dimensions		125 x 55 x 66mm (L x W x H)
	Weight		260g
Operating environment	Operating temperature(without battery)		-30 °C to +70 °C
	Storage temperature (without battery)		-40 °C to +85 °C
	Operating humidity		5% to 95% non-condensing
	Ingress protection rating		IP54
Interface	Digital inputs		3
	RS232		1
	SOS		1
	GNSS antenna		External antenna
	SIM		1x SIM Card
	Micro SD		1x SD Card(Min. 32GB~Max.512GB)

www.hboiot.com

info@HBOIOT.com

HB-T8 Intelligent Dashcam
2 Channels

- Video surveillance
- 2-Channel
- 1080P
- Driver status monitoring
- Advanced Driving Assistance System
- 4G LTE
- GPS/BDS

USE CASES

Container truck

Truck

Bus

Taxi

HBO IOT

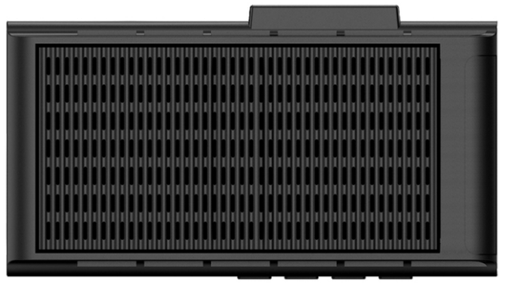

Function			
GNSS	GNSS		GPS, BEIDOU,
	Receiver		Tracking: 64 acquisition channels
	Tracking sensitivity		-165 dBM
	Accuracy		< 3 m
	Hot start		< 1 s
	Warm start		< 25 s
	Cold start		< 35 s
Network	Standard		4G LTE CAT4
	WIFI		2.4Ghz
	Band	European	LTE FDD: B1/3/5/7/8/20/28
			LTE TDD: B38/40/41
			WCDMA: B1/5/8
			GSM/EDGE: B3/8
		South America	LTE FDD: B1/2/3/4/5/7/8/28/66
			LTE TDD: B40
			WCDMA: B1/2/4/5/8
			GSM/EDGE: B2/3/5/8
Camera	Front camera		1920*1080/25fps/F=1.8/FOV=106°/Full Color
	Dsm camera		1920*1080/25fps/F2.0/FOV=72°/Monochrome
Power	Input voltage range		9 - 36 V DC with overvoltage protection
	Working current		450mA
	Dormant Working current		60mA
Physical specification	Dimensions		125 x 55 x 66mm (L x W x H)
	Weight		260g
Operating environment	Operating temperature(without battery)		-30 °C to +70 °C
	Storage temperature (without battery)		-40 °C to +85 °C
	Operating humidity		5% to 95% non-condensing
	Ingress protection rating		IP54
Interface	Digital inputs		3
	RS232		1
	SOS		1
	GNSS antenna		External antenna
	SIM		1x SIM Card
	Micro SD		1x SD Card(Min. 32GB~Max.512GB)

HB-VT08
Video Telematics

- Video surveillance
- 4-Channel
- 720P
- Driver status monitoring
- Advanced Driving Assistance System
- 4G LTE
- IP65
- Speed limit sign recognition

USE CASES

- Container truck
- Truck
- School Bus
- Taxi

HBO-IOT

Function			HB-VT08
GNSS	GNSS		GPS, BEIDOU,
	Receiver		Tracking: 64 acquisition channels
	Tracking sensitivity		-165 dBM
	Accuracy		< 3 m
	Hot start		< 1 s
	Warm start		< 25 s
	Cold start		< 35 s
Network	Standard		4G LTE CAT4
	WIFI		2.4Ghz
	Band	European	LTE FDD: B1/3/5/7/8/20/28
			LTE TDD: B38/40/41
			WCDMA: B1/5/8
			GSM/EDGE: B3/8
		South America	LTE FDD: B1/2/3/4/5/7/8/28/66
			LTE TDD: B40
			WCDMA: B1/2/4/5/8
			GSM/EDGE: B2/3/5/8
Camera	Front camera		1280*720/25fps/F=1.8/FOV=106° /Full Color
	Dsm camera		1280*720/25fps/F2.0/FOV=72° /Monochrome
	Sub camera		1280*720/25fps/F2.5/FOV=118° /Full Color
ADAS (forward-facing) camera	Min. Illumination		0.1 Lux @ (AGC ON)
	SNR		>42 dB
	Wide dynamic range		Supports WDR
	Image settings		Automatically adjustable brightness, chroma, contrast, color saturation, and sharpness
	FOV		Horizontal FOV: 106°
	Video quality		720P
	Frame rate		25fps
DSM (driver-facing) camera	Min. Illumination		0.01 Lux @ (AGC ON)
	SNR		>42 dB
	IR Type, Distance		2x IR LED,850 nm, IR Pass Filter (3 meters)
	FOV		72°
	Video quality		720P
	Frame rate		25fps
Passenger-view camera	Min. Illumination		0.01 Lux @ (AGC ON)
	SNR		>42 dB
	FOV		Horizontal FOV: 118°
	IR Type, Distance		2x IR LED,850 nm, IR Pass Filter (3 meters)
	Video quality		720P
	Frame rate		25fps
Power	Input voltage range		9 - 36 V DC with overvoltage protection
	Working current		800mA
	Dormant Working current		60mA
	standby battery		2950mAh Li-Ion battery 3.7 V （10.9Wh）
Physical specification	Dimensions		100 x114 x44.5mm (L x W x H)
	Weight		400g
Operating environment	Operating temperature(without battery)		-30 °C to +70 °C
	Storage temperature (without battery)		-40 °C to +85 °C
	Operating humidity		5% to 95% non-condensing
	Ingress protection rating		IP65
Memory	Built in capacity		256GB/512GB
Interface	Digital inputs		3
	Digital output		1
	RS232		1
	SOS		1
	GNSS antenna		External antenna
	SIM		1x SIM Card
Certification	Approvals Regulatory		CE

www.hboiot.com info@HBOIOT.com

HB-A3B
Speed Limiter

- Data Collecting
- RS232
- Speed limit
- USB-Upgrade and data read
- External Printing
- Built-in Relay
- Accelerator pedal controller

USE CASES

Container truck | Truck | Light Vehicles | Taxi | Cold chain

HBOIOT

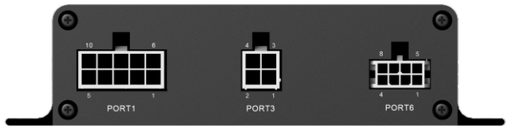

Function		HB-A3B-2G	HB-A3B-00	HB-A3B-4G
Communication	2G	●	○	●
	3G	○	○	○
	4G	○	○	●
Positioning	GPS	●	○	●
Hardware	Colour	Black		
	Size	130 * 82 * 31 mm		
	Material	Metal		
	Weight	265g		
	Indicator light	SYS\GPS		
	Working voltage	9-36V		
	Working current	100mA(12V)		
	Working temperature	-30℃~+70℃		
	Storage temperature	-40℃~+85℃		
	Battery	400mAh		
	Protection level	IP43		
	Storing data	10000 datas		
	Standby time	60 min		
Port	Power +	1		
	Power -	1		
	ACC	1		
	AD input	1		
	Digital input	1		
	Digital output	1		
	RS232	2		
	Pulse speed	1		
	Buzzer	Built-in		
	USB	2	1	1
	SIM	1	○	●
	SOS	●	●	●
	Communication antenna	●	○	●
	GPS antenna	●	○	●
	Built-in relay	●	●	●
Speed limit Function	Data record	5s/data, record driving data for the last 72 hours		
	Overspeed report	Record speeding information		
	Device log	Record device logs and status		
	Data collection	Backup device data via USB disk		
	Speed warning	Buzzer warning when speeding is imminent		
	Speed limit	The vehicle speed cannot exceed the set limit		
	Read speed mode	GPS speed / Pulse speed		
	Speed limit configuration	Can be set		

HB-A5D
GPS Tracker

- 4G LTE
- 9-90V wide range of power supply voltage
- Small and easy to install
- Built-in antenna
- OTA(over-the-air)updating
- IP65

USE CASES

Motorcycle | Light Vehicles | Truck | Taxi

Function		HB-A5D
Communication	2G	●
	3G	○
	4G	●
Positioning	GPS	●
Hardware	Colour	Black
	Size	85 * 50 *16 mm
	Material	Engineering plastics + Waterproof rubber
	Weight	109g
	Indicator light	SYS\GPS
	Working voltage	9-90V
	Working current	40mA (12V)
	Working temperature	-30℃~+70℃
	Storage temperature	-40℃~+85℃
	Battery	80mAh
	Protection level	Ip65
	Storing data	5000 datas
	Standby time	20 min
Port	Micro USB	1
	Power +	1
	Power -	1
	ACC	1
	Relay	1
	Analog input	1
Function	Real-time tracking	●
	Remote vehicle immobilezer	●
	Geo-fence	●
	Ignition detection	●

www.hboiot.com info@HBOIOT.com

HB-A5M
GPS Tracker

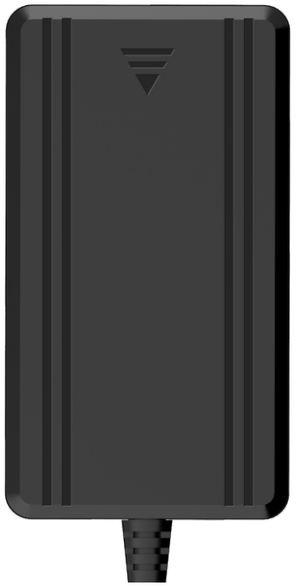

4G LTE

9-90V wide range of power supply voltage

Small and easy to install

Built-in antenna

FOTA OTA(over-the-air)updating

USE CASES

Motorcycle

Light Vehicles

Truck

Taxi

HBO-IOT

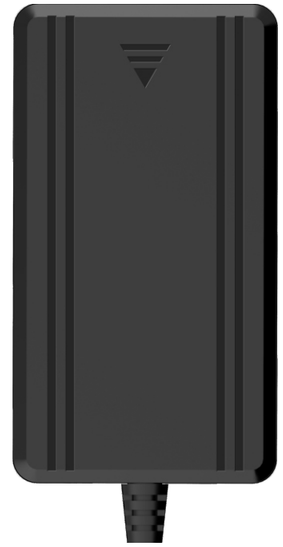

Function		HB-A5M
Communication	2G	●
	3G	○
	4G	●
Positioning	GPS	●
Hardware	Colour	Black
	Size	79.5 * 44 * 15 mm
	Material	Engineering plastics
	Weight	45g
	Indicator light	SYS\GPS
	Working voltage	9-90V
	Working current	40mA (12V)
	Working temperature	-30℃~+70℃
	Storage temperature	-40℃~+85℃
	Battery	80mAh
	Protection level	IP54
	Storing data	5000 datas
	Standby time	20 min
Port	Micro USB	1
	Power +	1
	Power -	1
	ACC	1
	Relay	1
	Analog input	○

HB-A1T

4G Tracker

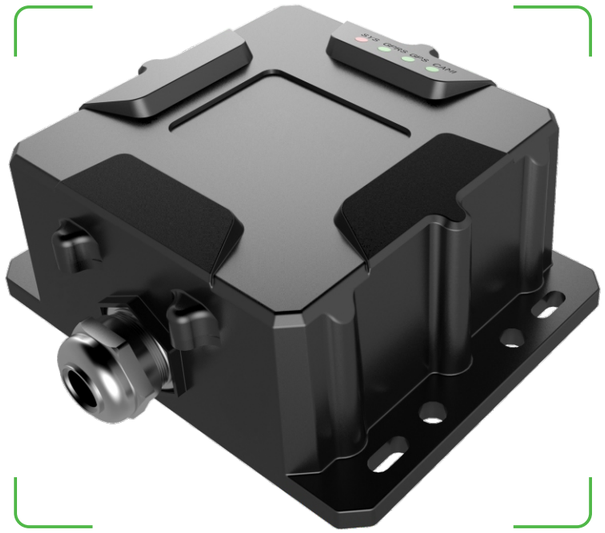

- Real-time monitoring
- Super Long Standby
- Rechargeable
- IP65 waterproof
- Intelligent alarm
- CAN BUS

USE CASES

Container car | Tractor | logistics vehicle | Large combines | Seeder

HBO IOT

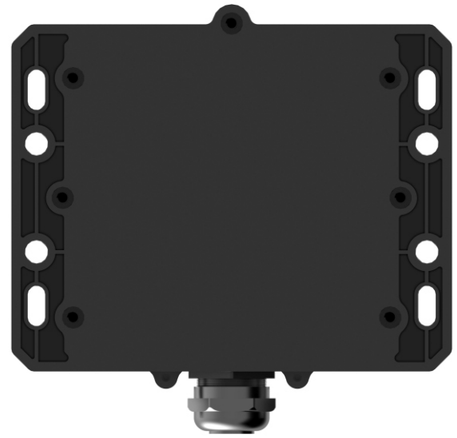

Function		HB-A1T
GNSS	Positioning mode	GPS/BDS
	Capture sensitivity	-148dBm
	Tracking sensitivity	-162dBm
	Warm boot	1 s
	Cold boot	32 s
	Positioning accuracy	<2.5m(CEP50)
Communication	2G	900/1800MHz
	4G	FDD:B1/B3/B5/B7/B8/B20
Hardware specifications	Operating voltage	9V-36V
	Operating current	100mA
	Operating temperature	-30℃~+70℃
	Storage temperature	-40℃~+85℃
	Storage capacity	8M byte
	Backup battery capacity	8000mA/3.7V
	Exterior dimensions	100*114*44.5mm
	Waterproof rating	IP65
	Weight	400g
Interface	ACC detection	1
	Serial	1
	CAN	1
	Communication antenna	Built-in or external
	GPS antenna	Built-in or external

HB-A9S
4G TELEMATICS

- WIFI AP and STA
- Bluetooth BLE
- 4G LTE
- RS232
- CAN BUS
- 1-WIRE
- USB
- e-SIM Card

USE CASES

Container truck | Truck | Light Vehicles | Taxi | Cold chain

HBO IOT

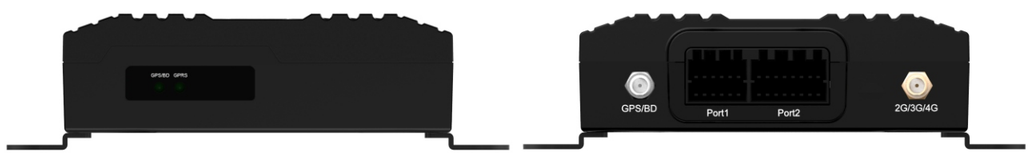

Function		HB-A9S
Module	Technology	4G CAT4(TDD LTE/TDD LTE)/3G(UMTS/HSPA)/2G(GSM/GPRS)/GNSS/BLUETOOTH/WI-FI
GNSS	GNSS	GPS, BEIDOU,
	Receiver	Tracking: 64 acquisition channels
	Tracking sensitivity	-165 dBM
	Accuracy	< 3 m
	Hot start	< 1 s
	Warm start	< 25 s
	Cold start	< 35 s
Cellular	Technology	LTE CAT4//UMTS/HSPA
	2G bands	B3/B5
	3G bands	B1/B5/B8
	4G bands	LTE-FDD:B1/B3/B5/B8, LTE-TDD:B34/B38/B39/B40/B41
	Data transfer	LTE: LTE-FDD Max. 100Mbps(DL)/Max. 50Mbps(UL), LTE-TDD Max 61Mbps/Max.18Mbps(UL) HSUPA: Max. 5.76Mbps UMTS: Max. 384Kbps (DL)/Max.384Kbps (UL) GPRS: Max. 107Kbps (DL)/Max.85.6Kbps (UL)
	Data support	SMS (text/data)
WIFI	WIFI Frequency	2.4G
	Working mode	AP、STA
	Hotspot numbers	8
Bluetooth	Bluetooth band	2.4G
	Bluetooth version	BLUETOOTH 2.1/3.0/4.0/4.2
	Working mode	BR/BLE
Power	Input voltage range	9 - 36 V DC with overvoltage protection
	Internal Back-up battery	400 mAh Li-Ion, 3.7 V battery (1.48 Wh)
Physical specification	Dimensions	114* 82 * 34mm (L x W x H)
	Weight	210 g
Operating environment	Operating temperature	-30 °C to +70 °C
	Storage temperature	-40 °C to +85 °C
		5% to 95% non-condensing
	Ingress protection rating	IP54

HB-R03
Digital Tachograph

- GPS/ GSM
- Speed limit
- Built-in printer
- Abnormal alarm
- Snapshot
- Driver identification
- Vehicle travelling data record

USE CASES

Container truck | Truck | Bus | Taxi | Cold chain

HBO IOT

HB-R03 is a Digital Tachograph with printer and a device fitted to a vehicle that digitally records its speed and distance, together with the driver's activity selected from a choice of modes. The device integrates GPS tracking / Digital tachograph / Speed limiter functions. We can also offer the customized program version system and change its parameters to satisfy local regulations. We have TS 16949 certificate to cooperate with car manufacturers and offered before-assembly market service.

Function		HB-R03-2G	HB-R03-00	HB-R03-01
Communication	2G	●	○	○
	3G	○	○	○
	4G	○	○	○
Positioning	GPS	●	○	●
Hardware	Colour	Black + Silver		
	Size	188 * 136 * 61 mm		
	Material	Plastic panel + Metal shell		
	Weight	650g		
	LED Screen	Operation screen		
	Printer	Thermal printer		
	Working voltage	9V-36V		
	Working current	100mA		
	Working temperature	-30℃~+70℃		
	Storage temperature	-40℃~+85℃		
	Battery	400mA		
	Protection level	IP43		
	Storing data	10000 datas		
	Standby time	60 min		
Port	Power +	1		
	Power -	1		
	ACC	1		
	AD input	1		
	Digital input	5		
	Digital output	1		
	RS232	2		
	Pulse speed	1		
	USB	1		
	Micro SD	1		
	Canbus J1939	1		
	Driver ID card	1		
	Buzzer	Built-in		
	SIM	1	1	○
	SOS	●	●	○
	Communication antenna	●	●	○
	GPS antenna	●	●	○
Digital tachograph Function	Driving record	1 s/data can store 48 hours records of vehicle speed/ Vehicle status/ Driving time		
	Location record	60 s/data can store 360 hours records of the position coordinates/ Average speed of the vehicle		
	Accident doubt	0.2 s/data can store 20 second records of the speed/ Time/ Status location of the vehicle before parking		
	Fatigue driving	Store the last 100 records of the start/end time and location information of fatigue driving		
	Device info	Record of device's info: VIN, Vehicle plate, Pulse coefficient, Initial installation time/mileage		
	Driver ID info	Record driver's information and store the last 200 records of the start/end time		
	Mileage statistics	Record driving mileage (Accuracy: 0.1 km)		
	Device log	Store the last 100 records of record device on/off and parameter modification data		
	Data collection	Backup device data via USB disk or software PC		

Customs Electronic Cargo Tracking System

Industry Demands:

In recent years, many countries have begun to use the Electronic Cargo Tracking System (ECTS) in order to improve the efficiency of border customs clearance, reduce illegal transportation and tax evasion. The use of GPS Electronics locks devices are the essential parts in the ECTS, which can increase the security level of the monitored cargo location and confirm that no one changes, diversion or steals goods during delivery. Sent alert to the platform of any illegal opening or tamper of e-Lock and the device unlock only for authorize person.

1.Information registration by customs: cargo, trucks, trip …
2.Lock installation

1.Arrive border exit port
2.ANPR scan again to confirm no incident during delivery
3.End trip on system



1.ANPR scanning, confirm all information related to trip
2.Trip start and leave entry port

1.Delivery and running on assigned route
2.Monitoring by Customs Management Center
3.Send action team if any illegal or abnormal incident

Program Features:

ECTS solution the development of a harmonized simplified process, which facilitates the movement of cargo internationally, assist in the enforcement of Tax laws and maximize revenue and collection, prevention of dumping/diversion.
1.enhanced cargo security and curbed diversions
2.ultimately reducing transit time, cost of cargo transportation and improved transparency

System functions:

1.The trip data management: Register all cargo, trucks, driver, stock value, entry / exit port location and from a trip management.
2.Site monitoring by CCTV system: Monitoring Entry / Exit point operation
3.Cargo location monitoring tracking
4.ANPR system to scan each truck pass through the border port station
5.Alert system for any illegal operation
6.MDVR system in action team vehicle, record the whole process of investigation

Oil & Gasoline Transportation Safety Solution

Industry Demands:

Oil & Gasoline transportation always facing a problem in petrol stealing, but the fuel sensor is not a perfect solution cause of the accuracy and deviation. So the most protective way is lock the valve and make sure that nobody can open the valve or lid during delivery. By this requirements, Electronic tracking lock is a good solution to solve the problem.

Program Features:

A key feature of Electronic Tracking Lock can connect more than 7 slave lock by Bluetooth as a series solution with 1 SIM card service. The slave lock are controlled by the master in lock / unlock alert, and both of them can use RFID / SMS / Mobile APPS and Platform to unlock.
1.The data and command are transmitted by Master lock communication module.
2.The Slave lock connect with Master by Bluetooth
3.Can protect and lock more than 8 position valve with 1 SIM service.