SOLAR PV MODULES

NEXTERA ELECTRICALS
BAHRAIN-KSA

FEATURES

- 36,60,72,114 cell configuration with wattage ranging from 40 to 315w.
- High fill factor for improved energy conversion efficiency.
- Electro luminescence tested for micro-cracks.
- Torsion and corrosion resistant with anodized aluminum frame.
- Enhanced reliability through use of distinctive encapsulant and back sheet.

SPECIFICATION

SSP60W	SSP5OW	SSP60W	SSP75W	SSP100W	SSP120W	SSP150W	SSP250W	SSP300W
cell type	156poly	156poly	156poly	156poly	156poly	156poly	156poly	156poly
Rated Power (Pmax)	5OW	60W	75W	100W	120W	150W	250W	300W
Max-power voltage Vmp (V)	17.89	18.04	17.99	17.99	17.79	17.85	29.9	36.01
Max-power current Imp (A)	2.8	3.33	4.17	5.57	6.75	8.41	8.33	8.37
Open circuit voltage (Voc)	21.7	21.66	22.12	21.7	21.58	22.58	37.45	44.6
Short Circuit Current (Isc)	3.04	3.67	4.49	6.11	7.36	8.7	8.82	8.97
Tolerance	0~±3%	0~±3%	0~±3%	0~±3%	0~±3%	0~±3%	0~±3%	0±3%
Dimension (mm)								
Weight Kg								

SIC: Irradiance 1000/m²cell temperature 25^{c}, AM 1.5

MECHANICAL CHARACTERISTICS							
Tolerance	3 %	3 %	3 %	3 %	3 %	3 %	3 %
No of Cell	36 (4x9)	36 (4x9)	36 (4x9)	36 (4x9)	36 (4x9)	36 (4x9)	60(6x10)
Junction Box	Solar	Solar	Solar	Solar	Solar	Solar	Solar
	IP65	IP65	IP65	IP65	IP65	IP65	IP65
Glass Type	Low iron, Borosil, Anti-Reflective, Tempered Glass 3.2 mm thickness						

OPERATING CONDITION							
Operation Temperature	-40-+85C	-40-+85C	-40-+85C	-40-+85C	-40-+85C	-40-+85C	-40-+85C
Starage Temperature	-40-+85C	-40-+85C	-40-+85C	-40-+85C	-40-+85C	-40-+85C	-40-+85C
Maximum System Voltage	DC1000V	DC1000V	DC1000V	DC1000V	DC1000V	DC1000V	DC1000V

TEMPERATURE AND CO-EFFICIENT							
NOCT	48C+2	48C+2	48C+2	48C+2	48C+2	48C+2	48C+2
Temp. coefficient of Voc	-0.34	-0.34	-0.34	-0.34	-0.34	-0.34	-0.34
Temp. coefficient of Isc	0.09	0.09	0.09	0.09	0.09	0.09	0.09
Power Temp. coefficient	-037	-037	-037	-037	-037	-037	-037

NEXTERA ELECTRICALS
BAHRAIN-KSA

PHOTOVOLTAIC MODULES

Branded
Manufactured in accordance with high standards of design & Quality Control

Positive Tolerance
Guarantee positive tolerance from +5%/ -0 Delivers higher outputs reliably

High Model Output
Highest conversion efficiency

Excellent module efficiency
Solar cell efficiency up to 18.3%
Module efficiency up to 15.6%

High performance
Higher PV energy yields even under low light and cloudy condition

Reliability
Premium quality raw material and advanced manufacturing processes guarantees the reliability of our modules

EL Tested (ELECTRO LUMINESCENCE)
Fully conforms to certification and regulatory standards

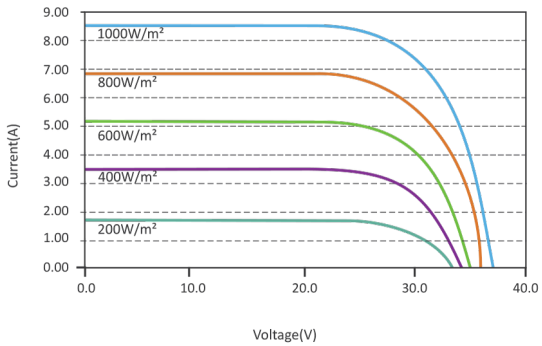

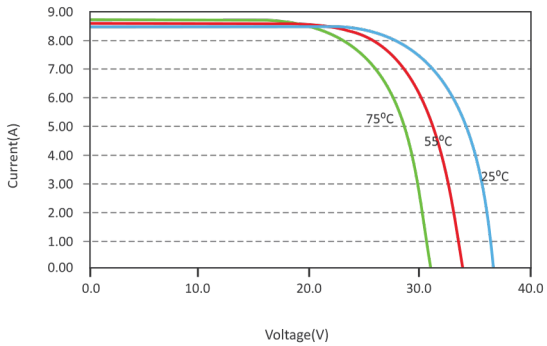

12 years
Product warranty

25 years
Performance warranty