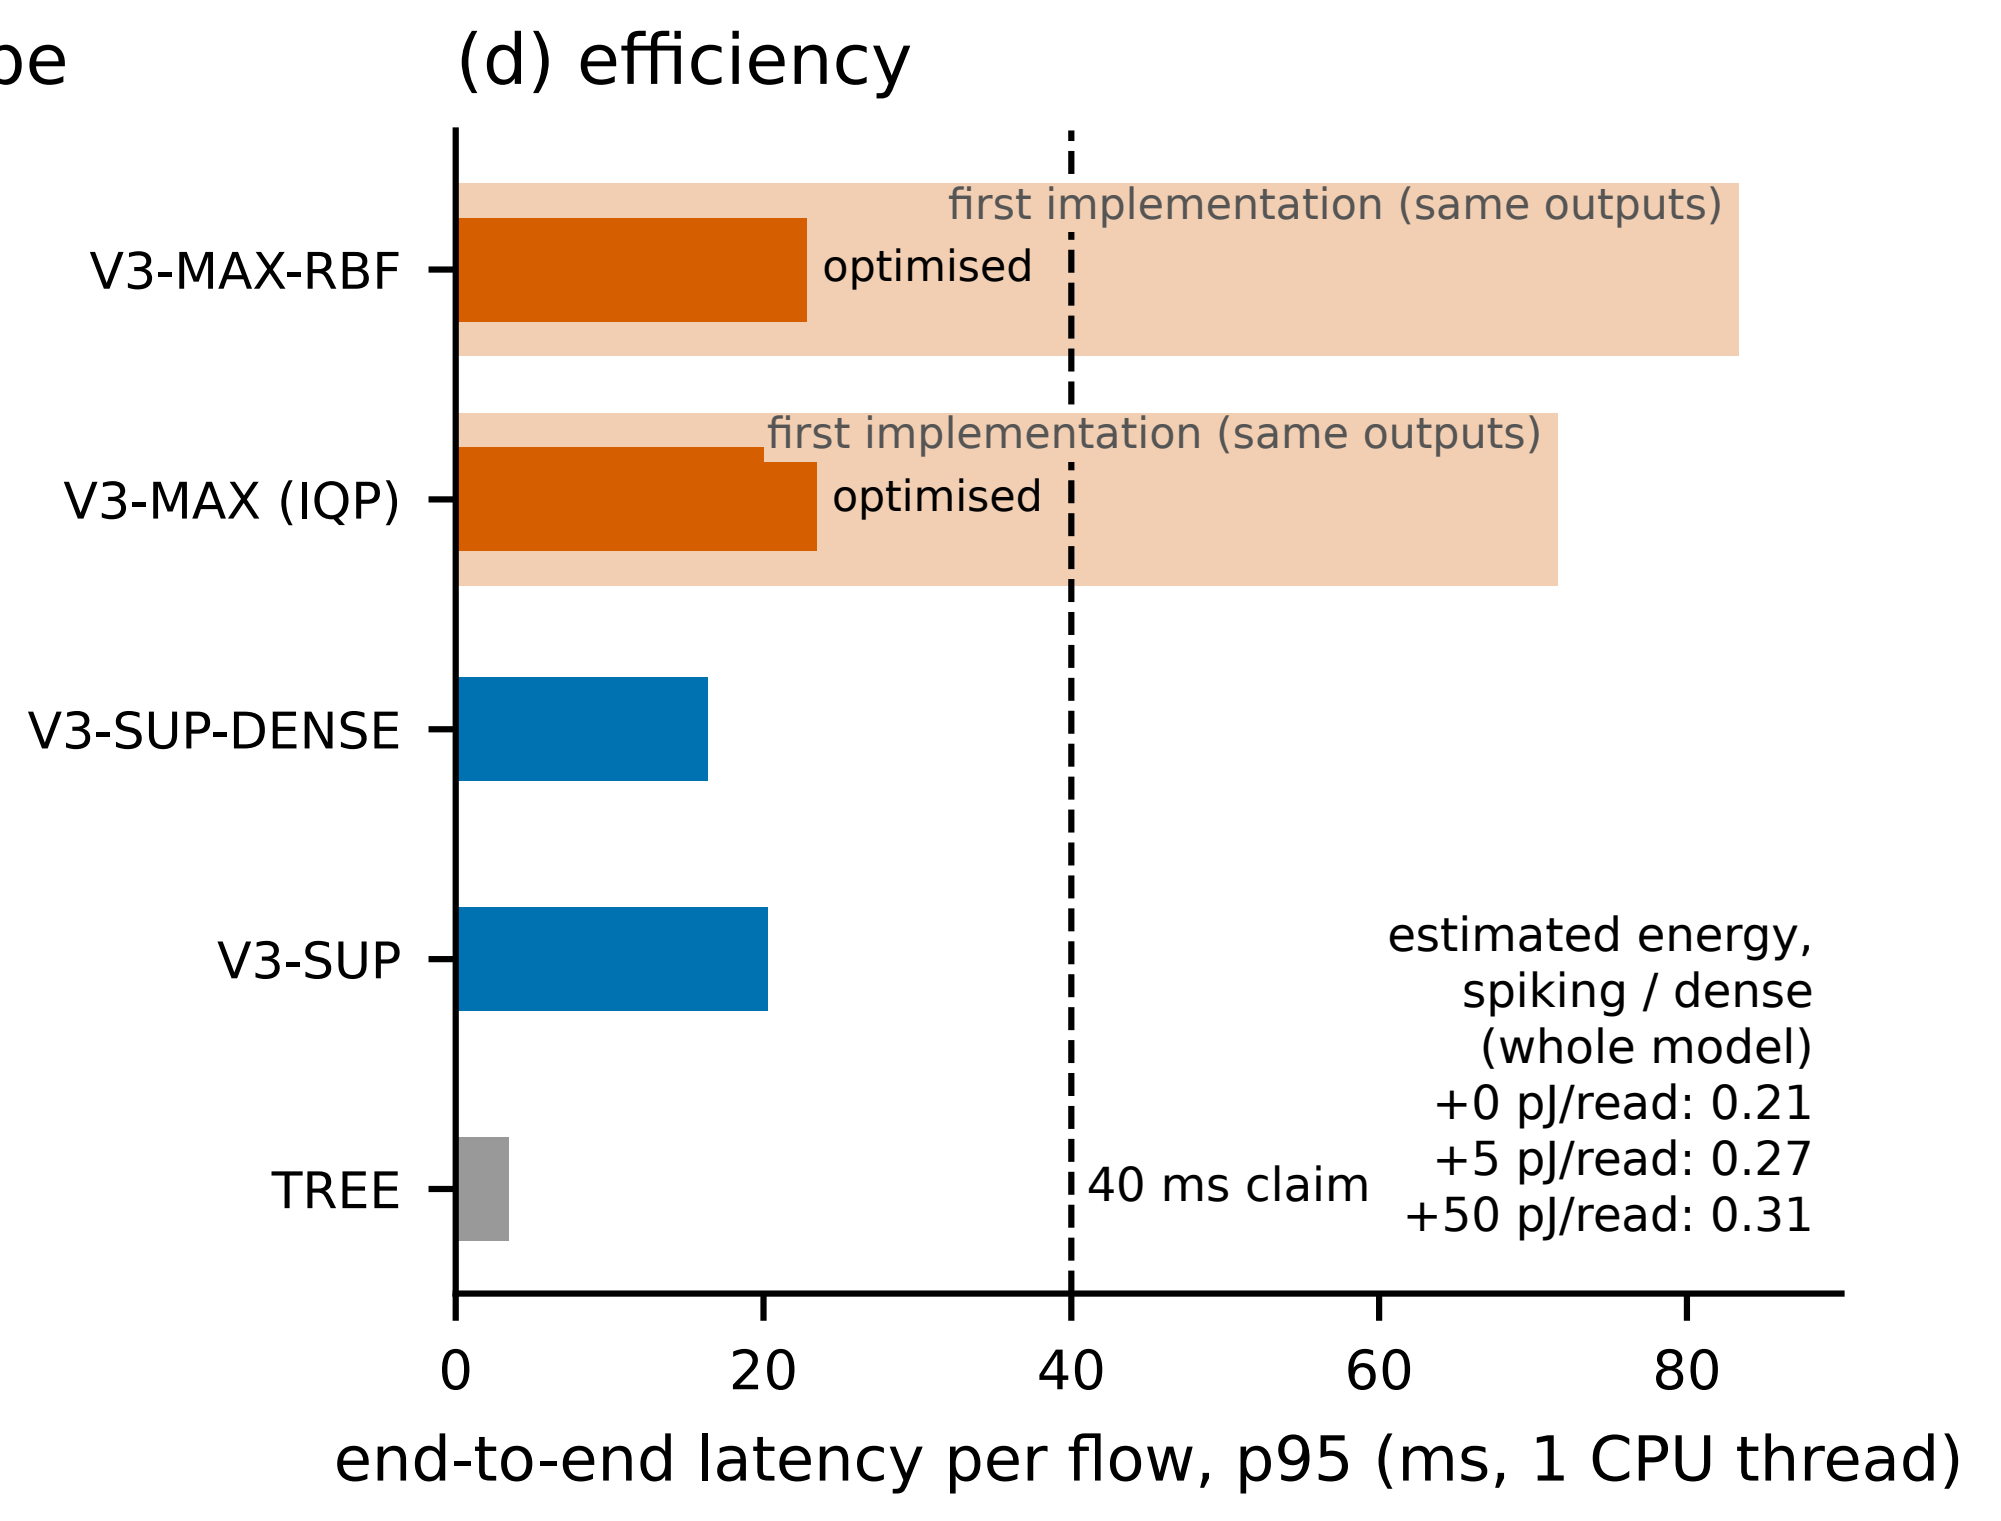
pe
(d) efficiency
first implementation (same outputs)
optimised
V3-MAX-RBF
first implementation (same outputs)
optimised
V3-MAX (IQP)
V3-SUP-DENSE
V3-SUP
TREE
40 ms claim
estimated energy,
spiking / dense
(whole model)
+0 pJ/read: 0.21
+5 pJ/read: 0.27
+50 pJ/read: 0.31
0
20
40
60
80
end-to-end latency per flow, p95 (ms, 1 CPU thread)