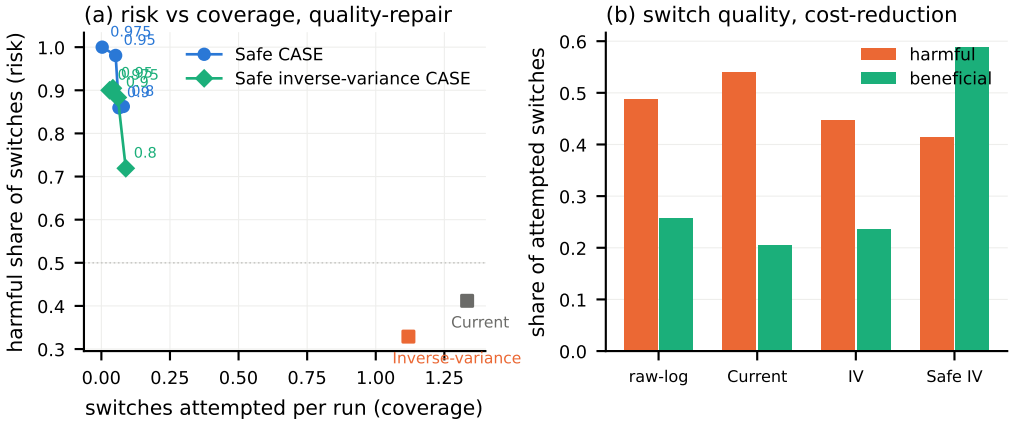
(a) risk vs coverage, quality-repair
harmful share of switches (risk)
switches attempted per run (coverage)
Safe CASE
Safe inverse-variance CASE
0.975
0.95
0.8
Current
Inverse-variance
(b) switch quality, cost-reduction
share of attempted switches
harmful
beneficial
raw-log
Current
IV
Safe IV