

Task2:

Identify the problem and solve it by placing the correct IP & subnet masks.

PC1 IP Address: 192.168.1.1

Subnet Mask 1: 255.255.255.0

PC2 IP Address: 192.168.1.2


Subnet Mask PC2: 255.255.255.0

PC3 IP Address: 192.168.2.1

Subnet Mask: 255.255.255.0

PC4 IP Address: 192.168.2.2

Subnet Mask PC4: 255.255.255.0

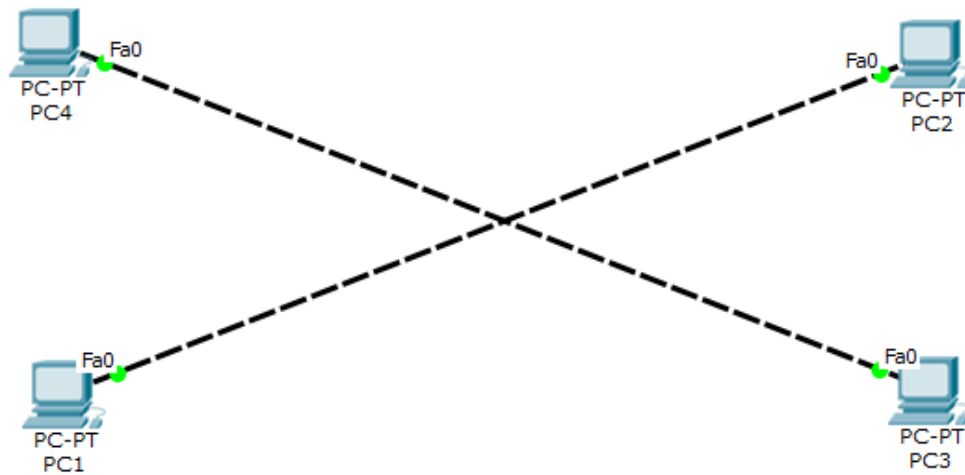

Task –2, Identify the problem between PC5 and Router1 Identify the cause, why PC1 is unable to establish the TELNET session with the Router and indicating the Red Signal in your own words?

Answer:

We Cannot apply telnet in console session.





Task3

Identify the cause, why Server0 is unable to connect with the Router and indicating the Red Signal in your own words?

Answer:

Because, we cannot use straight cables between router and server if we have a requirement of a straight cable so we have to connect switch between router and server.

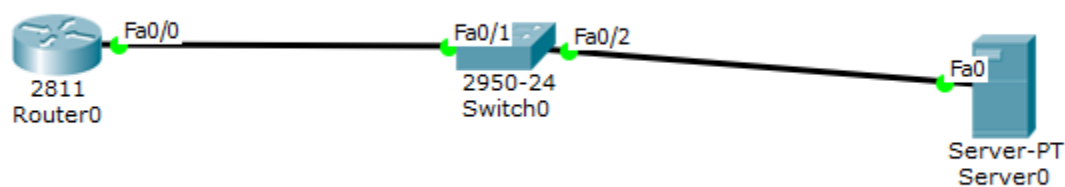

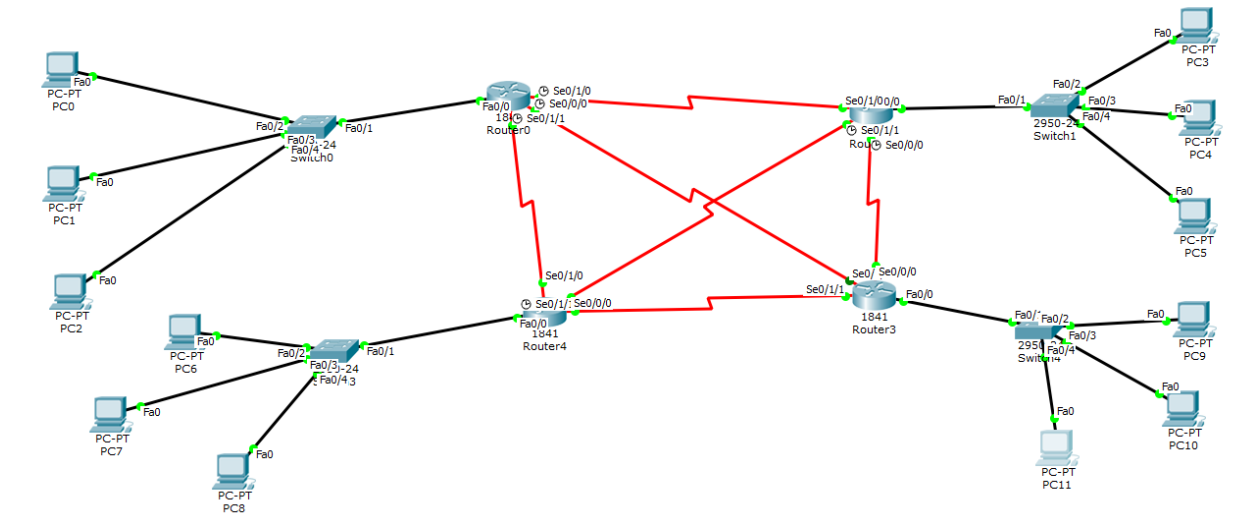

PC0

Physical Config Desktop Custom Interface

Command Prompt

```

Packet Tracer PC Command Line 1.0
PC>telnet 11.0.0.1
Trying 11.0.0.1 ...Open

User Access Verification

Password:
Router>
Router>
    
```

PC1

Physical Config Desktop Custom Interface

Command Prompt

```

Packet Tracer PC Command Line 1.0
PC>telnet 11.0.0.1
Trying 11.0.0.1 ...Open

User Access Verification

Password:
Router>|
    
```

