

Continue with configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en

Router#config t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#Hostname Hammad-15398-R1

Hammad-15398-R1(config)#int Fa0/0

Hammad-15398-R1(config-if)#ip address 192.168.1.1 255.255.255.0

Hammad-15398-R1(config-if)#no shutdown

Hammad-15398-R1(config-if)#

%LINK-S-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-S-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Hammad-15398-R1(config-if)#int Se0/3/0

Hammad-15398-R1(config-if)#ip address 10.1.1.1 255.255.255.252

Hammad-15398-R1(config-if)#clock rate 64000

Hammad-15398-R1(config-if)#no shutdown

%LINK-S-CHANGED: Interface Serial0/3/0, changed state to down

Hammad-15398-R1(config-if)#exit

Hammad-15398-R1(config)#

Copy

Paste

 Hammad-15398-R2

Physical Config CLI

```
Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASED FOR TECHNICAL SUPPORT  
Technical Support: http://www.cisco.com/techsupport  
Copyright (c) 1986-2007 by Cisco Systems, Inc.  
Compiled Wed 18-Jul-07 06:21 by pt_rel_team
```

```
--- System Configuration Dialog ---
```

```
Continue with configuration dialog? [yes/no]: no
```

```
Press RETURN to get started!
```

```
Router>en
```

```
Router#config t
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
Router(config)#hostname Hammad-15398-R2
```

```
Hammad-15398-R2(config)#ip address 10.1.1.2 255.255.255.252
```

```
^  
% Invalid input detected at '^' marker.
```

```
Hammad-15398-R2(config)#ip address 10.1.1.2 255.255.255.252
```

```
^  
% Invalid input detected at '^' marker.
```

```
Hammad-15398-R2(config)#int Se 0/3/0
```

```
Hammad-15398-R2(config-if)#ip address 10.1.1.2 255.255.255.252
```

```
Hammad-15398-R2(config-if)#no shutdown
```

```
Hammad-15398-R2(config-if)#
```

```
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up
```

```
Hammad-15398-R2(config-if)#int Se0/3/
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up
```

```
^  
% Invalid input detected at '^' marker.
```

```
Hammad-15398-R2(config-if)#int Se0/3/1
```

```
Hammad-15398-R2(config-if)#ip address 10.2.2.1 255.255.255.252
```

```
Hammad-15398-R2(config-if)#clock rate 64000
```

```
Hammad-15398-R2(config-if)#no shutdown
```

```
%LINK-5-CHANGED: Interface Serial0/3/1, changed state to down
```

```
Hammad-15398-R2(config-if)#exit
```

```
Hammad-15398-R2(config)#exit
```

```
Hammad-15398-R2#
```

```
%SYS-5-CONFIG_I: Configured from console by console
```

 Hammad-15398-R3

Physical Config CLI

```
62720K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 06:21 by pt_rel_team
```

```
--- System Configuration Dialog ---
```

```
Continue with configuration dialog? [yes/no]: NO
```

```
Press RETURN to get started!
```

```
Router>en
```

```
Router#config t
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
Router(config)#Hostname Hammad-15398-R3
```

```
Hammad-15398-R3(config)#int Fa0/0
```

```
Hammad-15398-R3(config-if)#ip address 192.168.3.1 255.255.255.0
```

```
Hammad-15398-R3(config-if)#no shutdown
```

```
Hammad-15398-R3(config-if)#
```

```
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
```

```
Hammad-15398-R3(config-if)#int Se0/3/0
```

```
Hammad-15398-R3(config-if)#ip address 10.2.2.2 255.255.255.252
```

```
Hammad-15398-R3(config-if)#no shutdown
```

```
Hammad-15398-R3(config-if)#
```

```
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up
```

```
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up
```

```
Hammad-15398-R3(config-if)#int Se0/3/1
```

```
Hammad-15398-R3(config-if)#ip address 10.3.3.1 255.255.255.252
```

```
Hammad-15398-R3(config-if)#clock rate 64000
```

```
Hammad-15398-R3(config-if)#no shutdown
```

```
% Invalid input detected at '^' marker.
```

```
Hammad-15398-R3(config-if)#no shutdown
```

```
%LINK-5-CHANGED: Interface Serial0/3/1, changed state to down
```

```
Hammad-15398-R3(config-if)#ip route 192.168.1.0 255.255.255.0 10.2.2.1
```

```
Hammad-15398-R3(config)#ip route 192.168.5.0 255.255.255.0 10.3.3.2
```

```
Hammad-15398-R3(config)#
```

 Hammad-15398-R4

Physical Config CLI

IC

```
cisco 2811 (MPC860) processor (revision 0x200) with 60416K/5120K bytes of memory
Processor board ID JAD05190MTZ (4292891495)
M860 processor: part number 0, mask 49
2 FastEthernet/IEEE 802.3 interface(s)
2 Low-speed serial(sync/async) network interface(s)
239K bytes of non-volatile configuration memory.
62720K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE SOFTWARE
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 06:21 by pt_rel_team
```

--- System Configuration Dialog ---

Continue with configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en

Router#config t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#Hostname Hammad-15398-R4

Hammad-15398-R4(config)#int Se0/3/0

Hammad-15398-R4(config-if)#ip address 10.3.3.2 255.255.255.252

Hammad-15398-R4(config-if)#no shutdown

^
% Invalid input detected at '^' marker.

Hammad-15398-R4(config-if)#no shutdown

Hammad-15398-R4(config-if)#

%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up

Hammad-15398-R4(config-if)#int Se0/3/1

Hammad-15398-R4(config-if)#ip

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up

% Incomplete command.

Hammad-15398-R4(config-if)#ip address 10.4.4.1 255.255.255.252

Hammad-15398-R4(config-if)#clock rate 64000

Hammad-15398-R4(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial0/3/1, changed state to down

Hammad-15398-R4(config-if)#ip route 192.168.1.0 255.255.255.0 10.3.3.1

Hammad-15398-R4(config)#ip route 192.168.3.0 255.255.255.0 10.3.3.1

Hammad-15398-R4(config)#ip route 192.168.5.0 255.255.255.0 10.4.4.2

Hammad-15398-R4(config)#

 Hammad-15398-R5

Physical Config CLI

```
2 FastEthernet/IEEE 802.3 interface(s)
2 Low-speed serial(sync/async) network interface(s)
239K bytes of non-volatile configuration memory.
62720K bytes of ATA CompactFlash (Read/Write)
Cisco IOS Software, 2800 Software (C2800NM-ADVIPSERVICESK9-M), Version 12.4(15)T1, RELEASE
Technical Support: http://www.cisco.com/techsupport
Copyright (c) 1986-2007 by Cisco Systems, Inc.
Compiled Wed 18-Jul-07 06:21 by pt_rel_team
```

--- System Configuration Dialog ---

Continue with configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>en

Router#config t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#hostname Hammad-15398-R5

Hammad-15398-R5(config)#int Fa0/0

Hammad-15398-R5(config-if)#ip address 192.168.5.1 255.255.255.0

Hammad-15398-R5(config-if)#no shutdown

Hammad-15398-R5(config-if)#

%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

Hammad-15398-R5(config-if)#int Se0/3/0

Hammad-15398-R5(config-if)#ip address 10.4.4.2 255.255.255.252

Hammad-15398-R5(config-if)#no shutdown

Hammad-15398-R5(config-if)#

%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up

ip route 192.168.1.0 255.255.255.0 10.4

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up

.4.ip route 192.168.1.0 255.255.255.0 10.4.4.1

% Invalid input detected at '^' marker.


Hammad-15398-R5(config-if)#ip address 192.168.1.0 255.255.255.0 10.4.4.1

% Invalid input detected at '^' marker.

Hammad-15398-R5(config-if)#ip route 192.168.1.0 255.255.255.0 10.4.4.1

Hammad-15398-R5(config)#ip route 192.168.3.0 255.255.255.0 10.4.4.1

Hammad-15398-R5(config)#

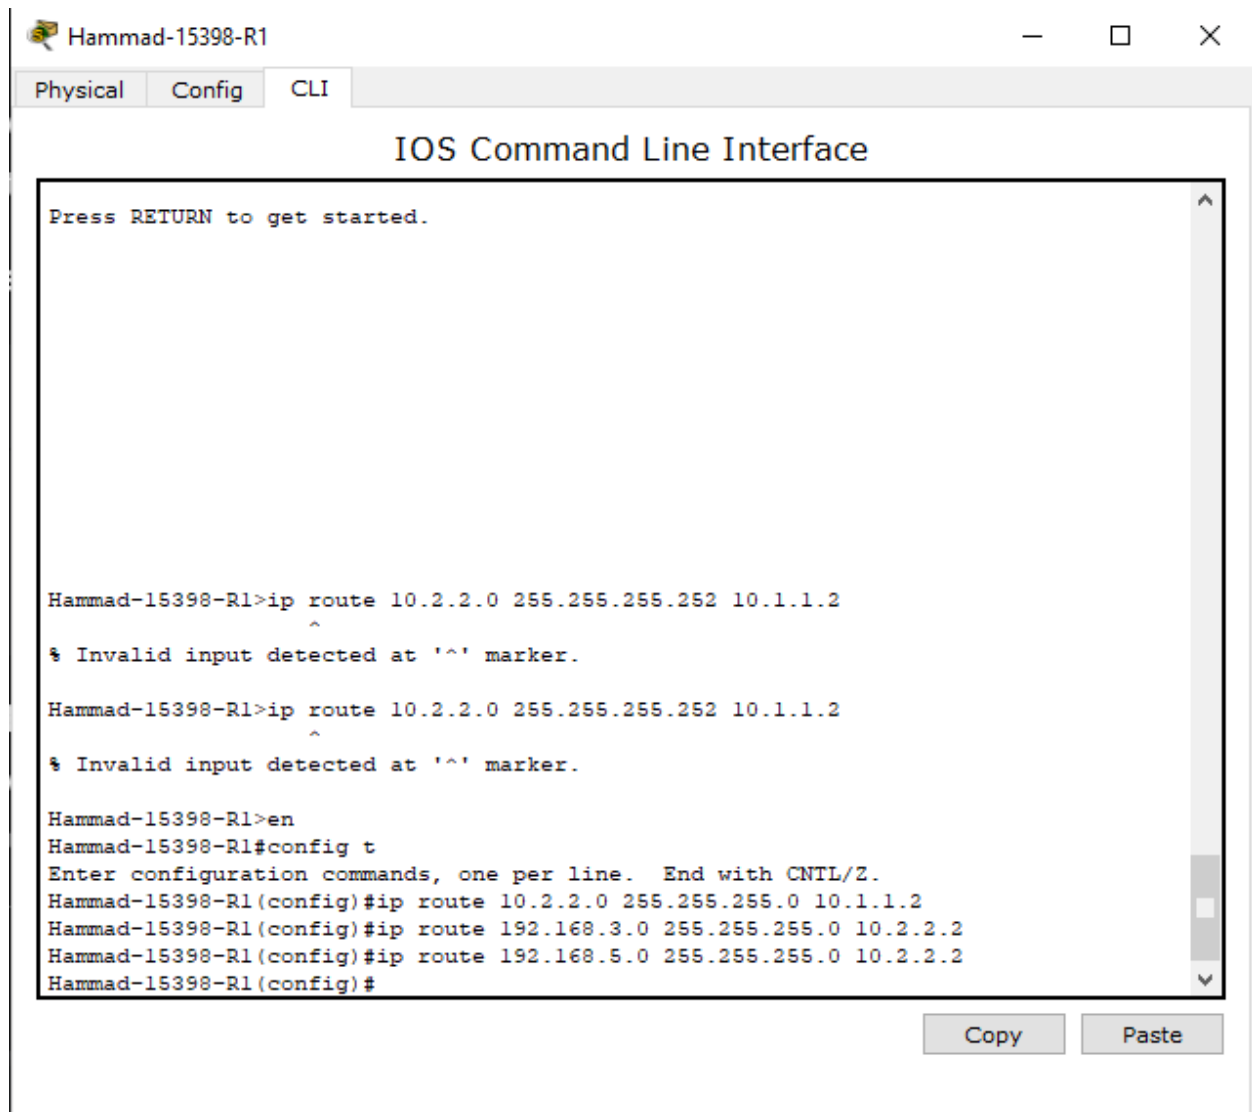

PC-A

Physical Config Desktop Custom Interface

IP Configuration

IP Configuration

☐ DHCP ☒ Static

IP Address: 192.168.1.10

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.1.1

DNS Server:

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address: /

Link Local Address: FE80::260:5CFF:FE03:B13E

IPv6 Gateway:

IPv6 DNS Server:

PC-B

Physical Config Desktop Custom Interface

IP Configuration

IP Configuration

☐ DHCP ☒ Static

IP Address: 192.168.3.10

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.3.1

DNS Server:

IPv6 Configuration

☐ DHCP ☐ Auto Config ☒ Static

IPv6 Address: /

Link Local Address: FE80::260:5CFF:FE7E:9526

IPv6 Gateway:

IPv6 DNS Server:

PC-C

Physical Config Desktop Custom Interface

IP Configuration

IP Configuration

☐ DHCP ☒ Static

IP Address: 192.168.5.10

Subnet Mask: 255.255.255.0

Default Gateway: 192.168.5.1

DNS Server:

IPv6 Configuration


☐ DHCP ☐ Auto Config ☒ Static


IPv6 Address: /

Link Local Address: FE80::290:CFF:FE8E:1A86

IPv6 Gateway:

IPv6 DNS Server:

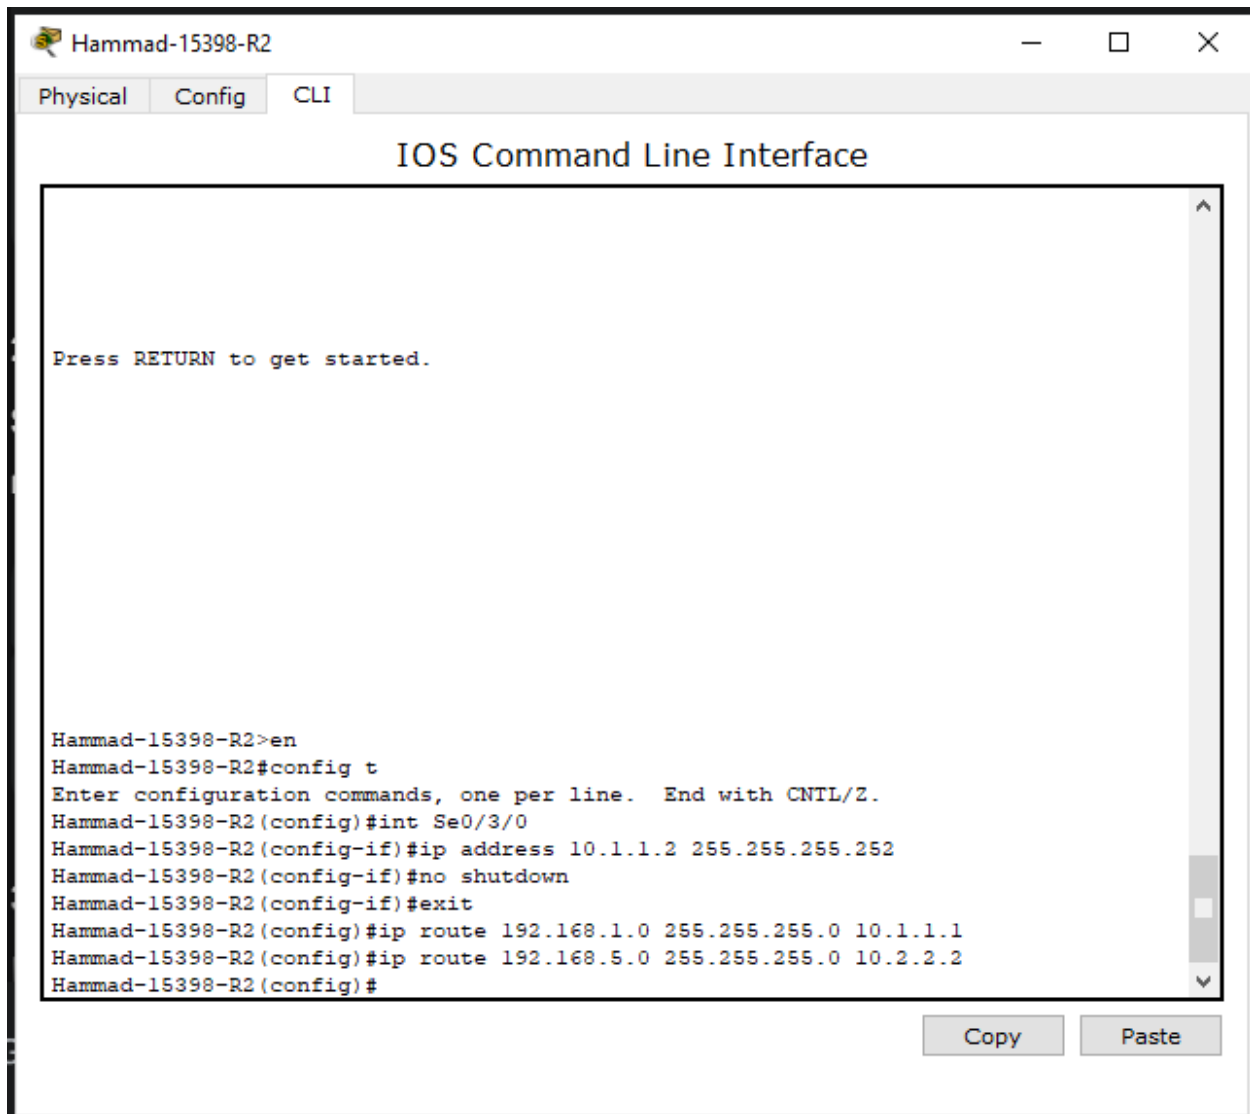

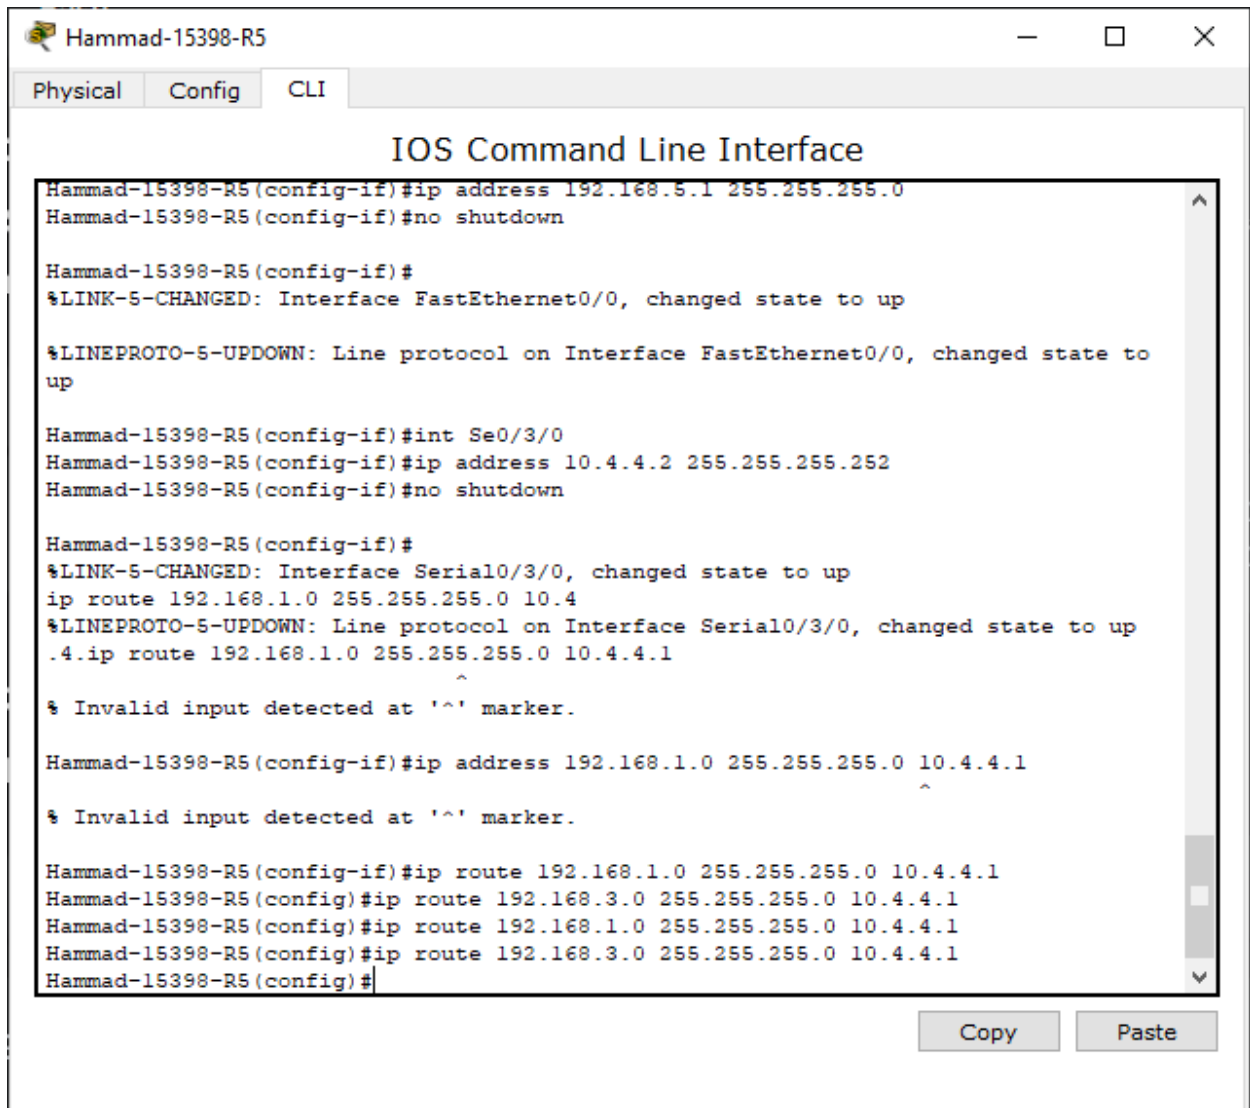

The screenshot shows a Cisco IOS Command Line Interface window for a device named 'Hammad-15398-R5'. The window has three tabs: 'Physical', 'Config', and 'CLI', with 'CLI' being the active tab. The title bar includes standard window controls (minimize, maximize, close). The main area displays a series of configuration commands and their corresponding system messages. The commands are:
1. `ip address 192.168.5.1 255.255.255.0` followed by `no shutdown` for interface FastEthernet0/0.
2. `int Se0/3/0` followed by `ip address 10.4.4.2 255.255.255.252` and `no shutdown` for interface Serial0/3/0.
3. `ip route 192.168.1.0 255.255.255.0 10.4` followed by `.4 ip route 192.168.1.0 255.255.255.0 10.4.4.1`.
4. `ip address 192.168.1.0 255.255.255.0 10.4.4.1`.
5. `ip route 192.168.1.0 255.255.255.0 10.4.4.1`.
6. `ip route 192.168.3.0 255.255.255.0 10.4.4.1`.
7. `ip route 192.168.1.0 255.255.255.0 10.4.4.1`.
8. `ip route 192.168.3.0 255.255.255.0 10.4.4.1`.
The outputs show status changes for interfaces and line protocols, and several 'Invalid input detected at '^' marker.' messages. A vertical scrollbar is on the right side of the text area. At the bottom right, there are 'Copy' and 'Paste' buttons.

```
Hammad-15398-R5
Physical Config CLI
IOS Command Line Interface
Hammad-15398-R5(config-if)#ip address 192.168.5.1 255.255.255.0
Hammad-15398-R5(config-if)#no shutdown

Hammad-15398-R5(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up


%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up


Hammad-15398-R5(config-if)#int Se0/3/0
Hammad-15398-R5(config-if)#ip address 10.4.4.2 255.255.255.252
Hammad-15398-R5(config-if)#no shutdown


Hammad-15398-R5(config-if)#
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up
ip route 192.168.1.0 255.255.255.0 10.4
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up
.4.ip route 192.168.1.0 255.255.255.0 10.4.4.1
^
% Invalid input detected at '^' marker.


Hammad-15398-R5(config-if)#ip address 192.168.1.0 255.255.255.0 10.4.4.1
^
% Invalid input detected at '^' marker.


Hammad-15398-R5(config-if)#ip route 192.168.1.0 255.255.255.0 10.4.4.1
Hammad-15398-R5(config)#ip route 192.168.3.0 255.255.255.0 10.4.4.1
Hammad-15398-R5(config)#ip route 192.168.1.0 255.255.255.0 10.4.4.1
Hammad-15398-R5(config)#ip route 192.168.3.0 255.255.255.0 10.4.4.1
Hammad-15398-R5(config)#
```

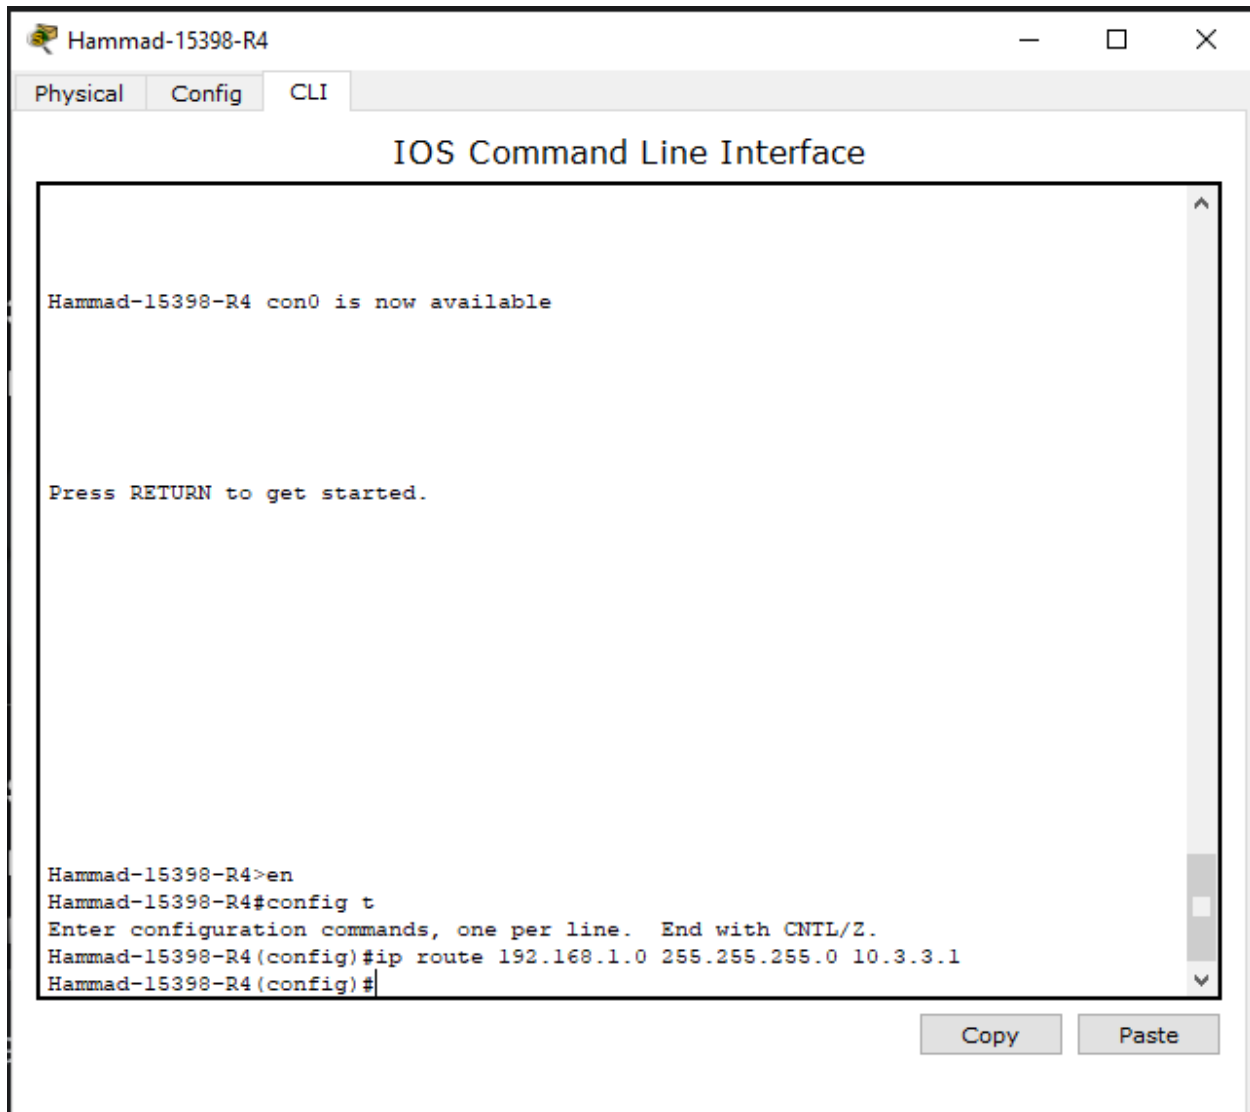

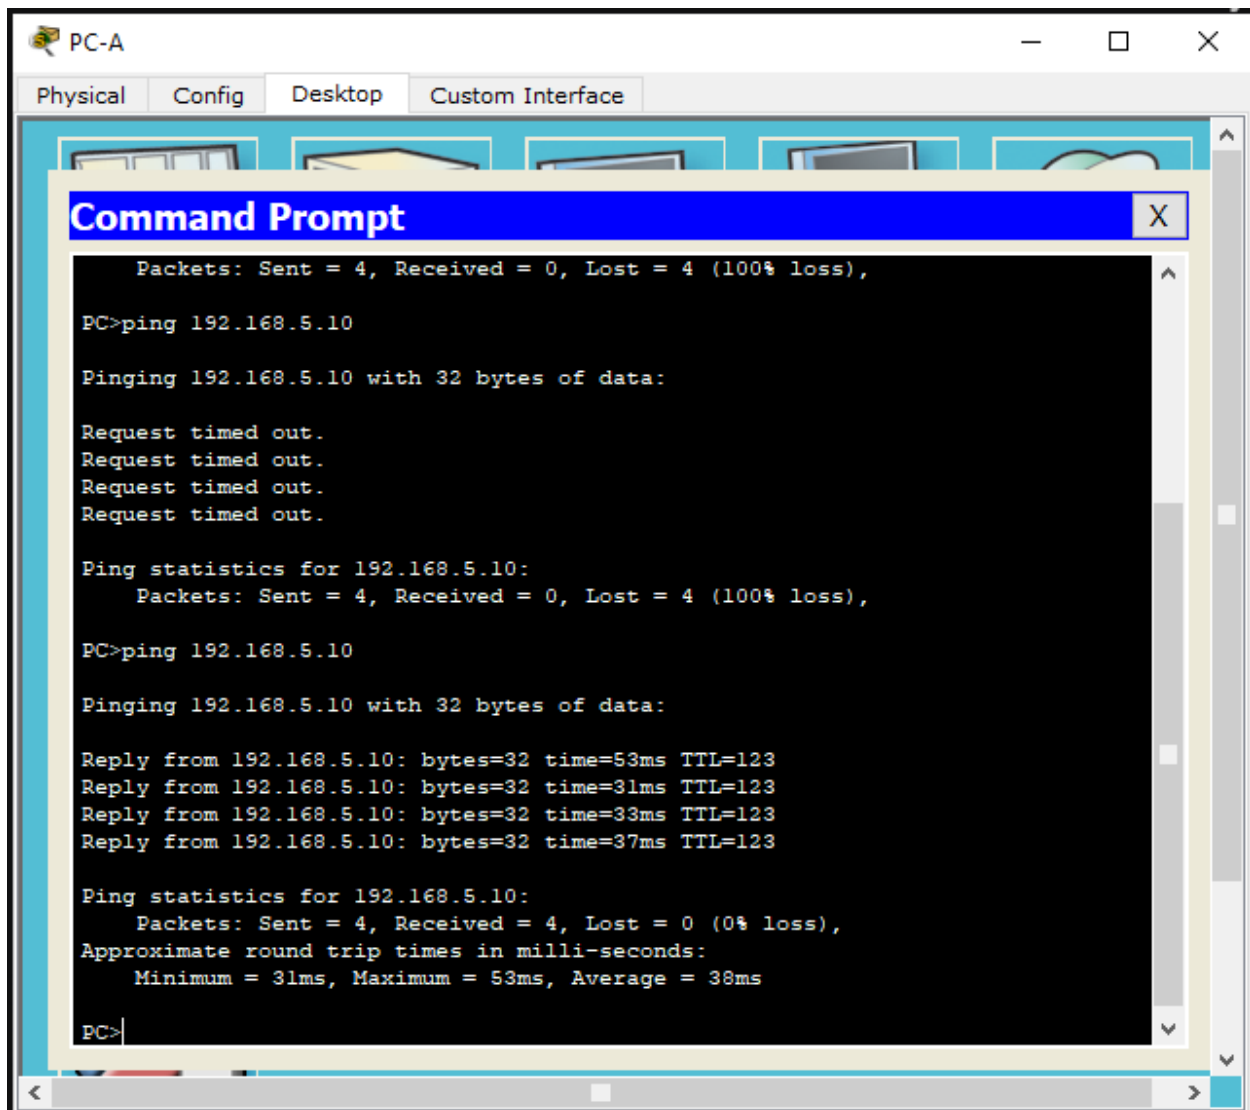

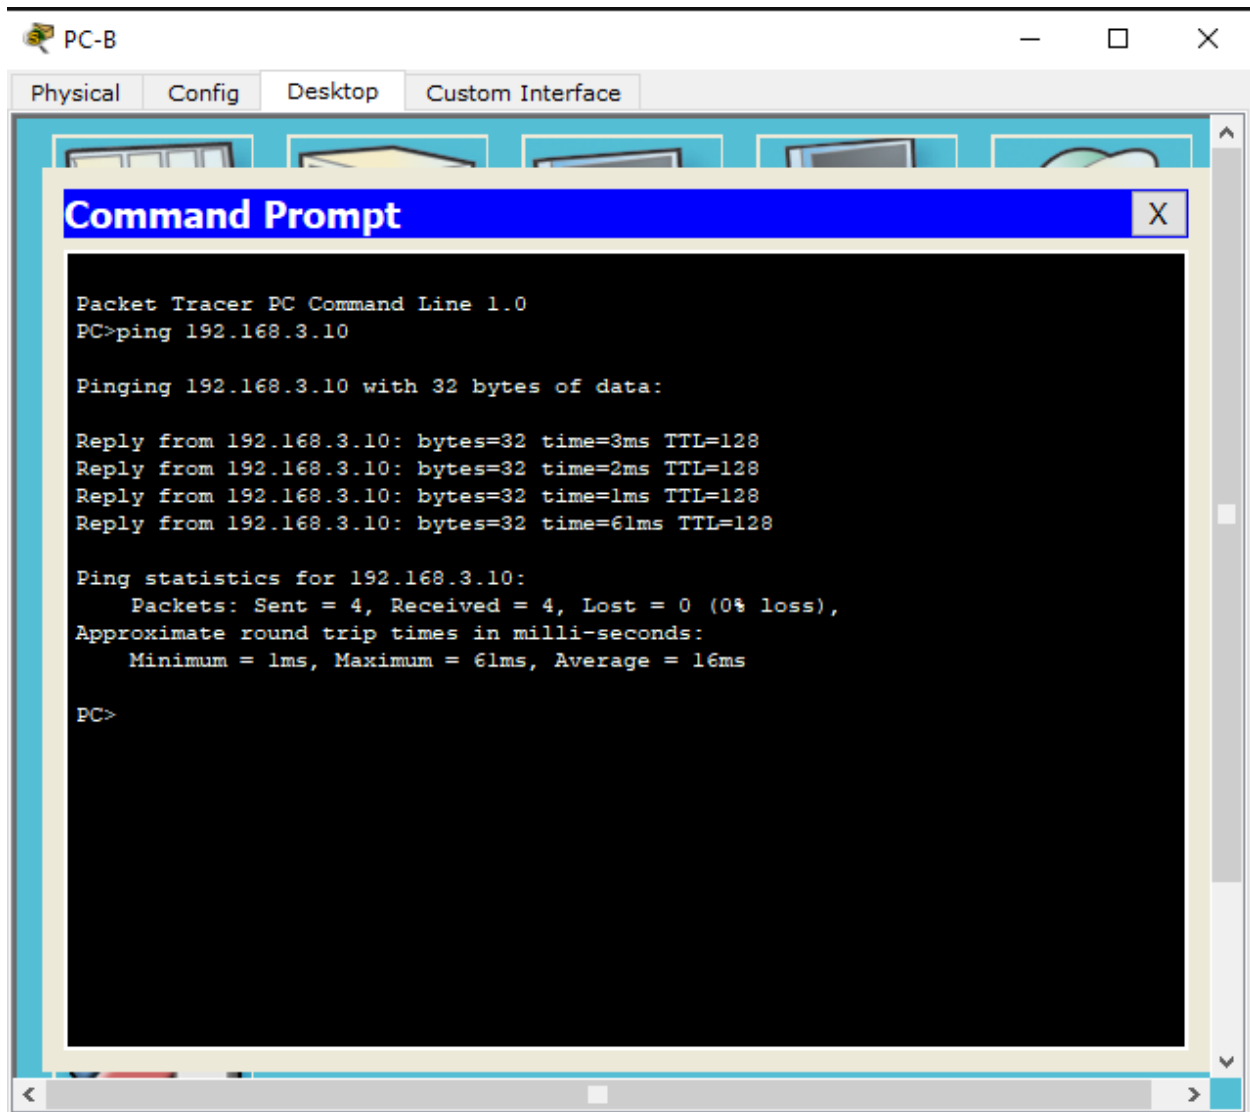

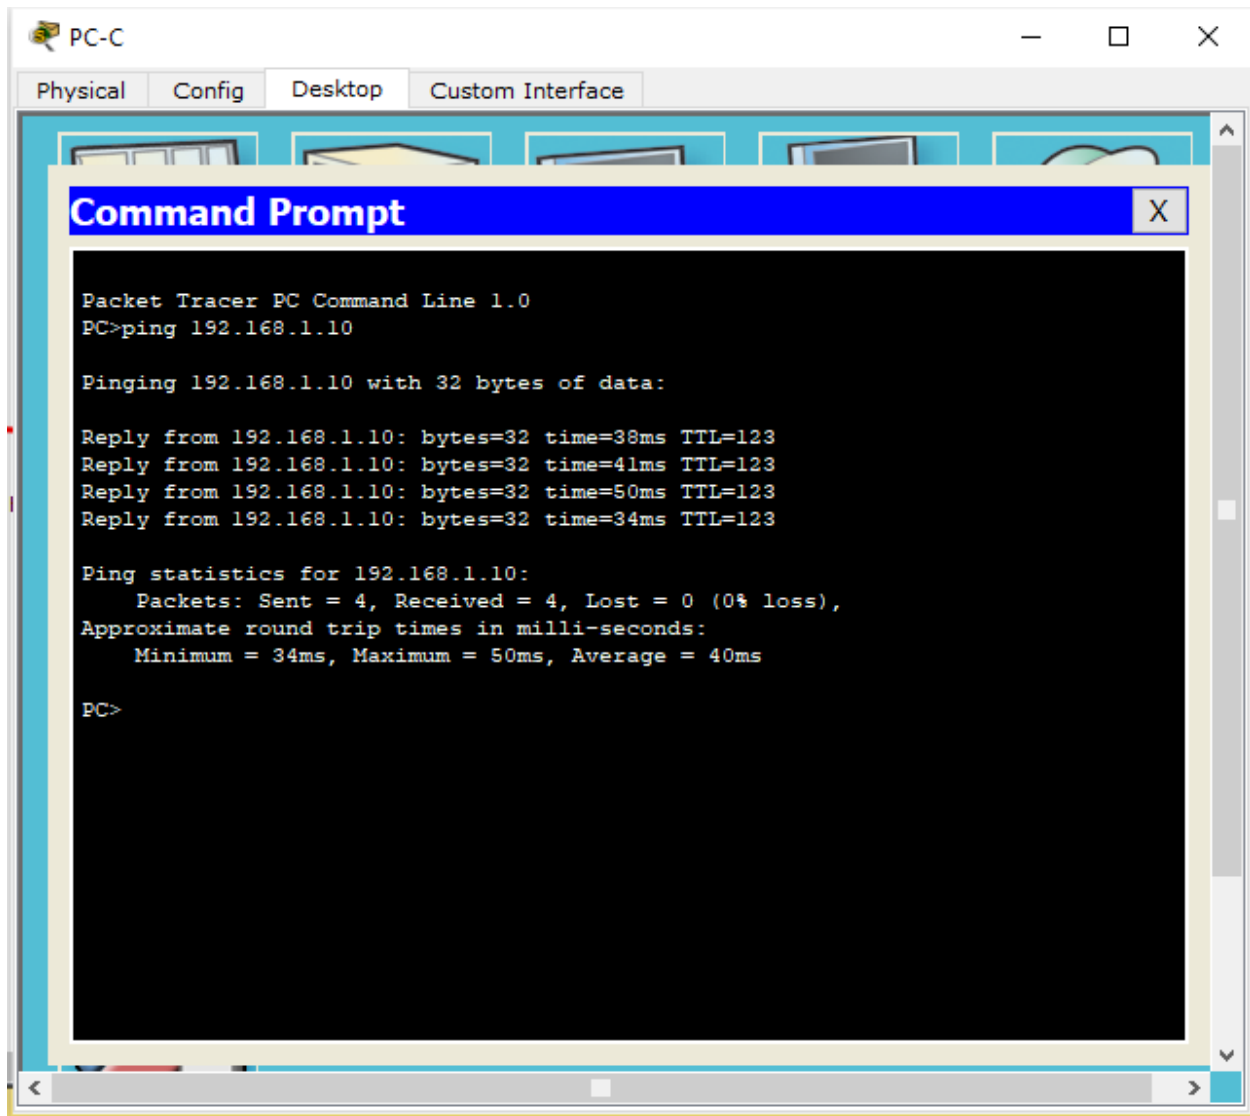

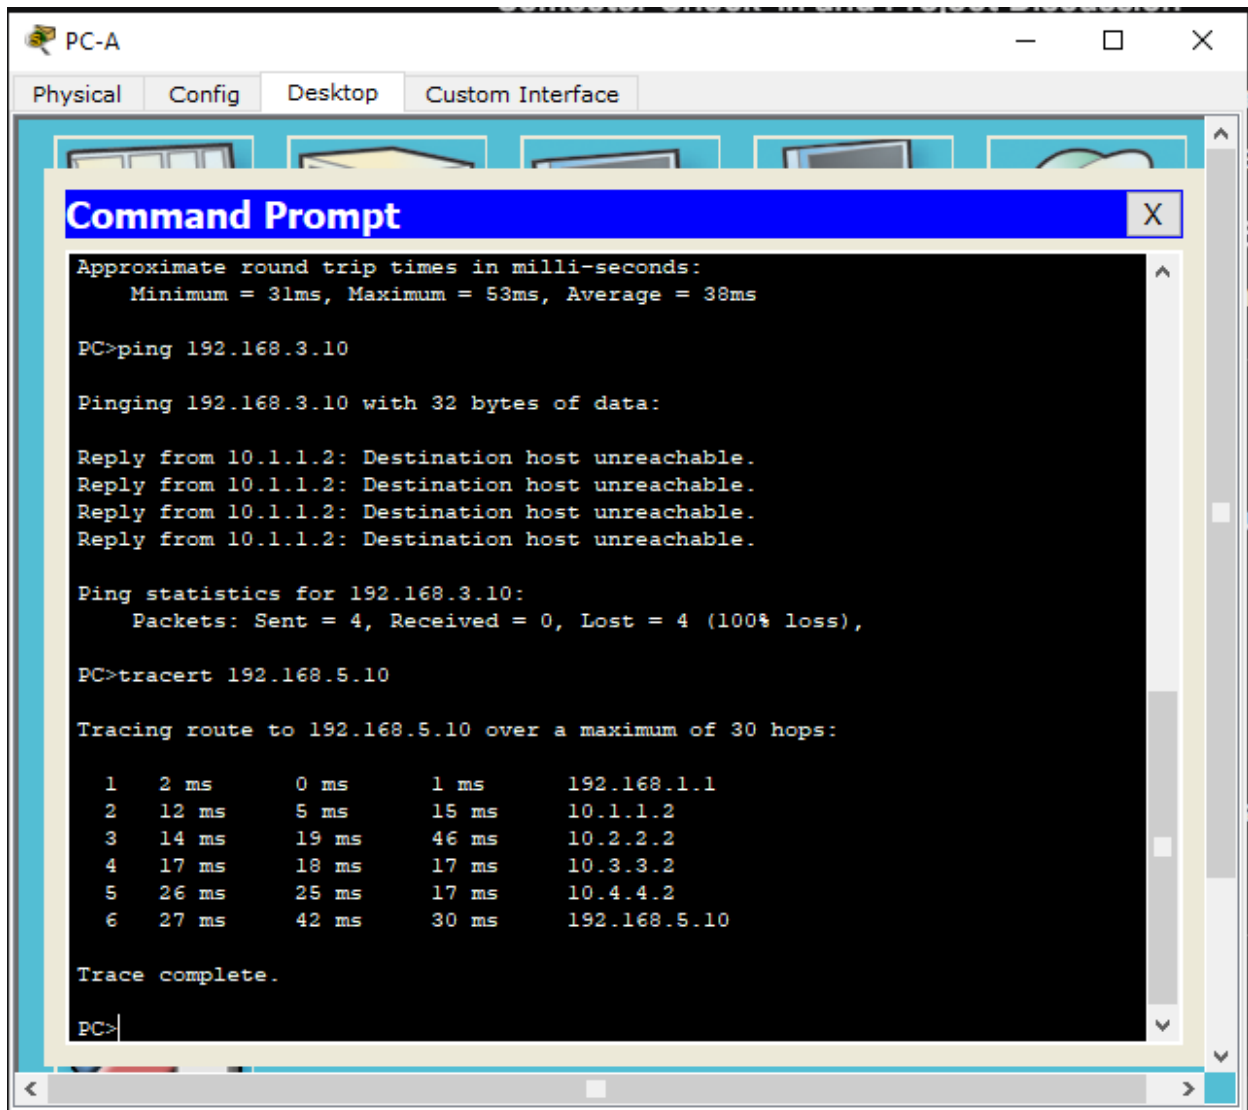

The screenshot shows a Packet Tracer PC-A desktop environment. A Command Prompt window is open, displaying the results of a ping and a traceroute command. The window has a blue title bar with the text "Command Prompt" and a close button. The background of the desktop shows a simplified representation of a PC with icons for folders and files.

```
PC-A
Physical Config Desktop Custom Interface

Command Prompt

Approximate round trip times in milli-seconds:
  Minimum = 31ms, Maximum = 53ms, Average = 38ms

PC>ping 192.168.3.10

Pinging 192.168.3.10 with 32 bytes of data:

Reply from 10.1.1.2: Destination host unreachable.
Reply from 10.1.1.2: Destination host unreachable.
Reply from 10.1.1.2: Destination host unreachable.
Reply from 10.1.1.2: Destination host unreachable.

Ping statistics for 192.168.3.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),


PC>tracert 192.168.5.10

Tracing route to 192.168.5.10 over a maximum of 30 hops:

  0  2 ms    0 ms    1 ms    192.168.1.1
  1  12 ms   5 ms   15 ms   10.1.1.2
  2  14 ms   19 ms  46 ms   10.2.2.2
  3  17 ms   18 ms  17 ms   10.3.3.2
  4  26 ms   25 ms  17 ms   10.4.4.2
  5  27 ms   42 ms  30 ms   192.168.5.10

Trace complete.

PC>
```

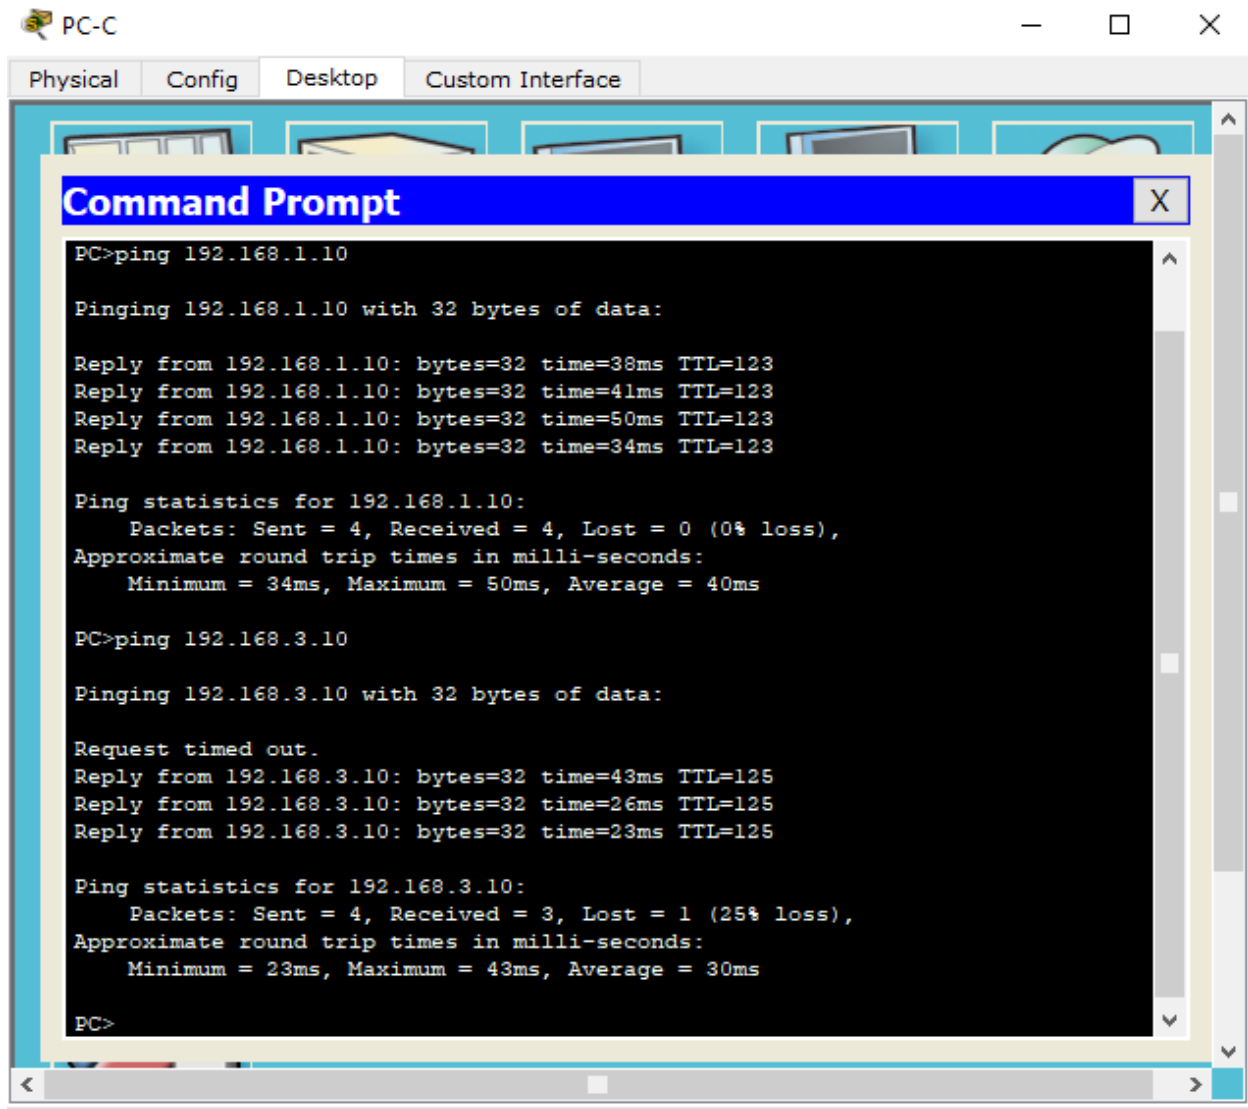

The screenshot shows a Packet Tracer PC-C desktop environment. The desktop has a blue background with several icons. A Command Prompt window is open, displaying the results of two ping commands. The first command is for 192.168.1.10, which shows successful results with 0% loss. The second command is for 192.168.3.10, which shows a 25% loss due to a timed-out request.

```
PC-C
Physical Config Desktop Custom Interface

Command Prompt
PC>ping 192.168.1.10

Pinging 192.168.1.10 with 32 bytes of data:

Reply from 192.168.1.10: bytes=32 time=38ms TTL=123
Reply from 192.168.1.10: bytes=32 time=41ms TTL=123
Reply from 192.168.1.10: bytes=32 time=50ms TTL=123
Reply from 192.168.1.10: bytes=32 time=34ms TTL=123

Ping statistics for 192.168.1.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 34ms, Maximum = 50ms, Average = 40ms

PC>ping 192.168.3.10

Pinging 192.168.3.10 with 32 bytes of data:

Request timed out.
Reply from 192.168.3.10: bytes=32 time=43ms TTL=125
Reply from 192.168.3.10: bytes=32 time=26ms TTL=125
Reply from 192.168.3.10: bytes=32 time=23ms TTL=125

Ping statistics for 192.168.3.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 23ms, Maximum = 43ms, Average = 30ms

PC>
```