


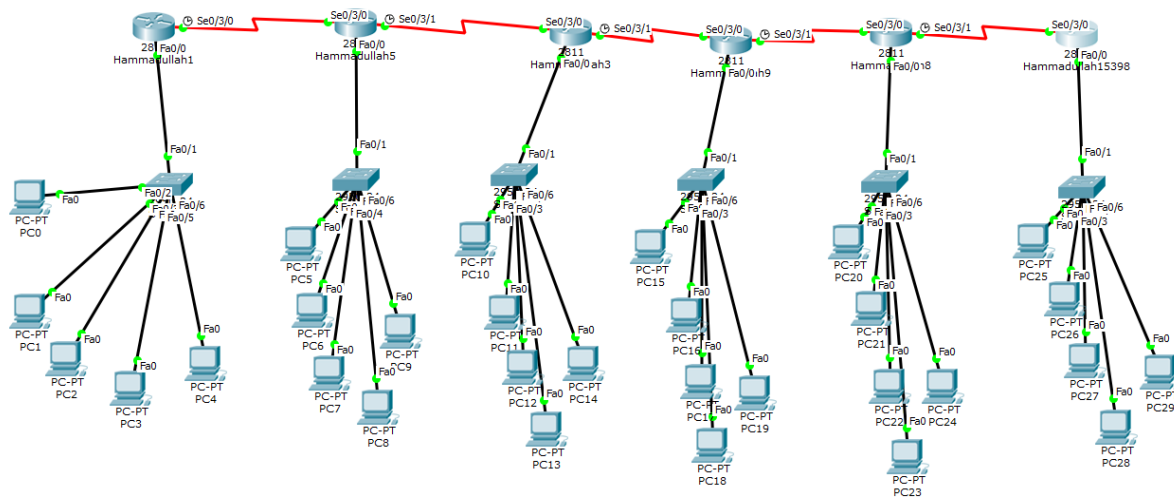

Hammaullah1

Physical Config CLI

IOS Command Line Interface

```
%LINK-5-CHANGED: Interface Serial0/3/0, changed state to down
Router(config-if)#
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 10.10.10.1 255.0.0.0
Router(config-if)#ip address 10.10.10.1 255.255.255.240
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up

%LINK-5-CHANGED: Interface Serial0/3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/0, changed state to up

Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#exit
Router(config)#router ospf 15398
Router(config-router)#network 10.10.10.0 0.0.0.3 area 0
Router(config-router)#network 192.168.1.0 0.0.0.15 area 0
Router(config-router)#exit
Router(config)#
00:14:54: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.2.1 on Serial0/3/0 from
LOADING to FULL, Loading Done
```

Copy

Paste

 Hammaadullah5

Physical

Config

CLI

IOS Command Line Interface

```
Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#ip address 11.11.11.1 255.0.0.0
Router(config-if)#ip address 11.11.11.1 255.255.255.240
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to
up

Router(config-if)#exit
Router(config)#interface Serial0/3/1
Router(config-if)#
%LINK-5-CHANGED: Interface Serial0/3/1, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0/3/1, changed state to up

Router(config-if)#exit
Router(config)#interface FastEthernet0/0
Router(config-if)#exit
Router(config)#router ospf 15398
Router(config-router)#network 11.11.11.0 0.0.0.15 area 0
Router(config-router)#network 192.168.1.0 0.0.0.15 area 0
Router(config-router)#network 192.168.2.0 0.0.0.15 area 0
Router(config-router)#exit
Router(config)#
00:27:24: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.1.1 on Serial0/3/0 from
```

Copy

Paste

 Hammadullah3

— □ ×

Physical Config CLI

IOS Command Line Interface

```
Press RETURN to get started.

Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 15398
Router(config-router)#network 12.12.12.0 0.0.0.15 area 0
Router(config-router)#network 192.168.2.0 0.0.0.15 area 0
Router(config-router)#network 192.168.3.0
00:27:51: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.2.1 on Serial0/3/0 from
LOADING to
Router(config-router)#network 192.168.3.0 0.0.0.15 area 0
Router(config-router)#exit
Router(config)#
00:28:54: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.4.1 on Serial0/3/1 from
LOADING to FULL, Loading Done
```

Copy Paste

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router 15398
^
% Invalid input detected at '^' marker.

Router(config)#router ospf 15398
Router(config-router)#network 13.13.13.0 0.0.0.15 area 0
Router(config-router)#network 192.168.3.0 0.0.0.15 area 0
Router(config-router)#network 192.168.4.0 0.0.0.15 area 0
Router(config-router)#exit
Router(config)#
00:28:43: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.3.1 on Serial0/3/0 from
LOADING to FULL, Loading Done

00:29:10: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.5.1 on Serial0/3/1 from
LOADING to FULL, Loading Done
```

IOS Command Line Interface

```
Router>en
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#router ospf 15398
Router(config-router)#network 14.14.14.0 0.0.0.15 area 0
Router(config-router)#network 192.168.4.0 0.0.0.15 area 0
Router(config-router)#network 192.168.5.0 0.0
00:29:00: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.4.1 on Serial0/3/0 from
LOADING to FULL, Loading Done
.
^
% Invalid input detected at '^' marker.

Router(config-router)#network 192.168.5.0 0.0.0.15 area 0
Router(config-router)#exit
Router(config)#
00:29:39: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.5.2 on Serial0/3/1 from
LOADING to FULL, Loading Done
```

Copy

Paste

Physical

Config

CLI

IOS Command Line Interface

Press RETURN to get started.

Router>en

Router#config t

Enter configuration commands, one per line. End with CNTL/Z.

Router(config)#router ospf 15398

Router(config-router)#network 15.15.15.0 0.0.0.15 area 0

Router(config-router)#network 192.168.5.0 0.0.0.15 area 0

Router(config-router)#exit

Router(config)#

00:29:28: %OSPF-5-ADJCHG: Process 15398, Nbr 192.168.5.1 on Serial0/3/0 from
LOADING to FULL, Loading Done

Copy

Paste

Network diagram showing a topology of routers and PCs connected in a line. The routers are labeled with their serial interfaces (Se0/3/0, Se0/3/1) and the PCs are labeled with their IP addresses (PC0, PC1, PC2, PC3, PC4, PC5, PC6, PC7, PC8, PC9, PC10, PC11, PC12, PC13, PC14, PC15, PC16, PC17, PC18, PC19, PC20, PC21, PC22, PC23, PC24, PC25, PC26, PC27, PC28, PC29). The diagram shows a series of connections between the routers and PCs, with the routers acting as central hubs for the PCs.

Fire	Last Status	Source	Destination	Type	Color	Time(sec)	Periodic	Num	Edit	Delete
●	Successful	PC0	PC29	ICMP	Blue	0.000	N	0	(edit)	(delete)
●	Successful	PC1	PC21	ICMP	Orange	0.000	N	1	(edit)	(delete)
●	Successful	PC2	PC16	ICMP	Green	0.000	N	2	(edit)	(delete)
●	Successful	PC3	PC13	ICMP	Pink	0.000	N	3	(edit)	(delete)
●	Successful	PC4	PC6	ICMP	Yellow	0.000	N	4	(edit)	(delete)
●	Successful	PC27	PC14	ICMP	Light Blue	0.000	N	5	(edit)	(delete)
●	Successful	PC24	PC11	ICMP	Purple	0.000	N	6	(edit)	(delete)
●	Successful	PC25	PC7	ICMP	Dark Blue	0.000	N	7	(edit)	(delete)
●	Successful	PC16	PC13	ICMP	Red	0.000	N	8	(edit)	(delete)
●	Successful	PC26	PC22	ICMP	Brown	0.000	N	9	(edit)	(delete)
●	Successful	PC7	PC10	ICMP	Dark Purple	0.000	N	10	(edit)	(delete)
●	Successful	Ham...	Ham...	ICMP	Black	0.000	N	11	(edit)	(delete)
●	Successful	PC27	PC16	ICMP	Light Green	0.000	N	12	(edit)	(delete)
●	Successful	PC19	PC9	ICMP	Dark Green	0.000	N	13	(edit)	(delete)
●	Successful	PC16	PC3	ICMP	Dark Red	0.000	N	14	(edit)	(delete)
●	Successful	PC28	PC23	ICMP	Dark Blue	0.000	N	15	(edit)	(delete)

Time: 00:41:41 | Power Cycle Devices | Fast Forward Time | Realtime