

NOVA PROGRAM

Nova Thermal Control Requirements

Domain: Thermal control

Revision A | Synthetic extraction benchmark

2. Functional requirements

REQ-NVA-THM-001 | Ambient operating range

The battery control assembly shall perform all monitoring functions from -30 deg C to +70 deg C ambient.

REQ-NVA-THM-002 | Shutdown band

The controller shall command thermal shutdown at or above 90 deg C and shall not command thermal shutdown below 85 deg C.

REQ-NVA-THM-003 | Coolant delivery

While battery heat rejection is 35 kW, coolant flow through the pack shall be at least 8.0 L/min.

3. Verification-oriented requirements

Identifier	Requirement title	Normative requirement
REQ-NVA-THM-004	Controlled recovery	After thermal shutdown, recovery shall be permitted only when temperature has remained below 70 deg C for 60 s, and no latched sensor fault is present.
REQ-NVA-THM-005	Cell temperature uniformity	During a 30-minute 2C discharge, the difference between the hottest and coldest measured cell temperatures shall not exceed 5 deg C.

Applicability notes

Context	Interpretation
Unless a requirement states otherwise	Limits apply to the complete production-intent assembly.
Use of shall	The complete sentence is normative; table columns do not split obligations.

4. Normative installation figure

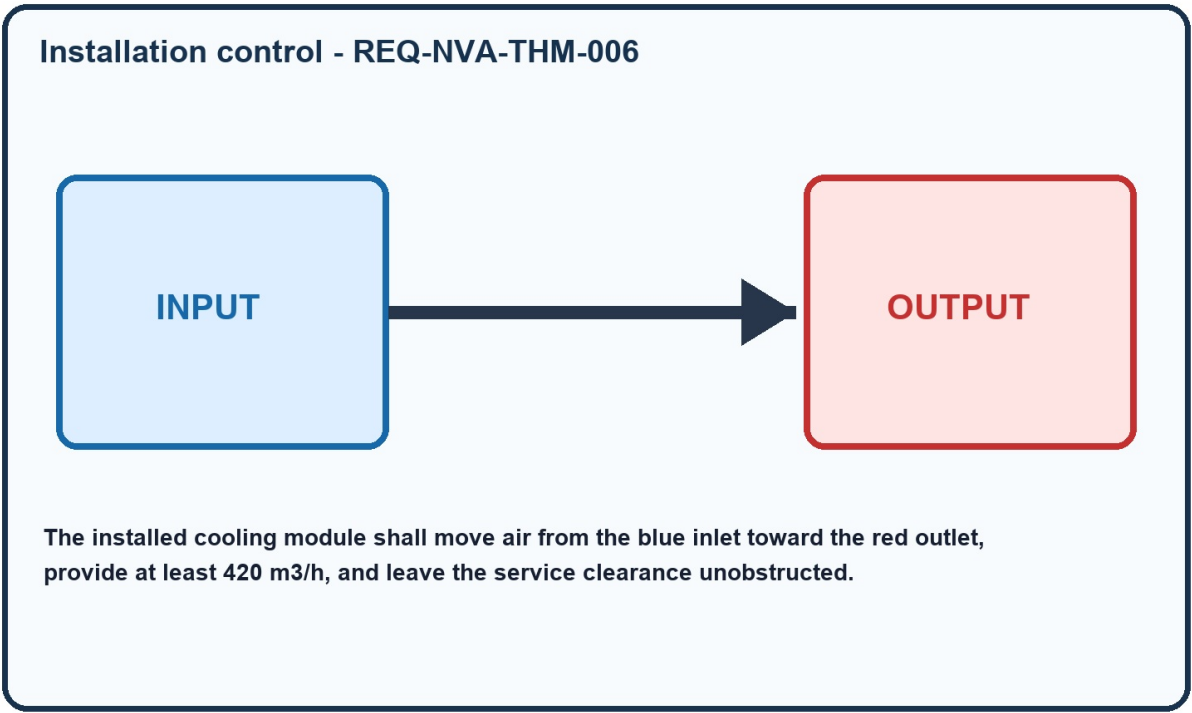


Figure 4-1. Colored geometry and embedded annotation are normative.

Interface context (informative)

