

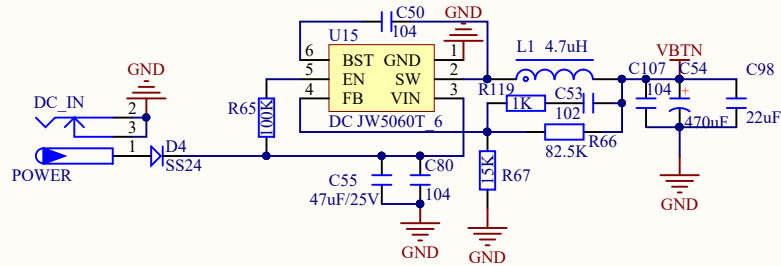
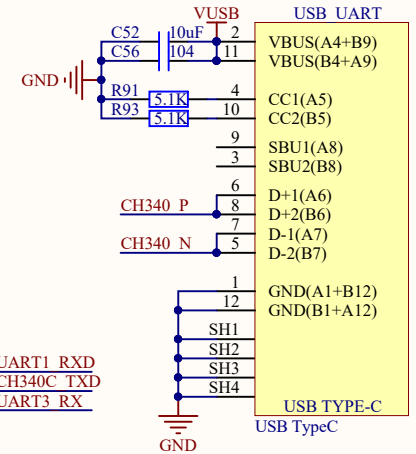
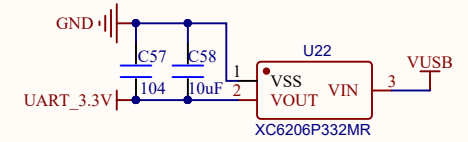

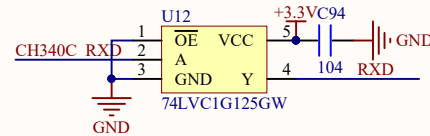




DC-DC POWER IN

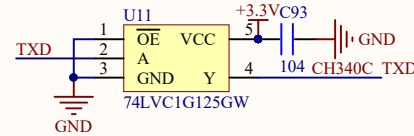




USB UART&USB POWER

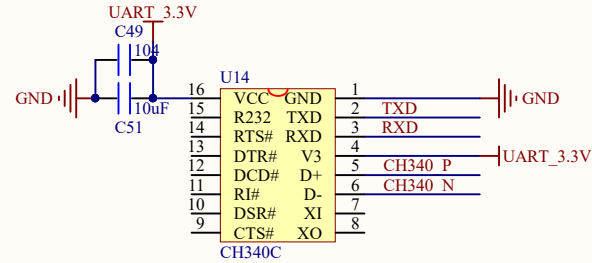


POWER SWITCH

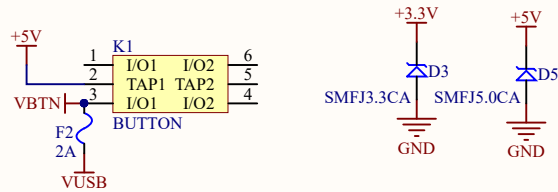

1.8V/3.3V POWER




POWER SOURCE ON BOARD



Title		
Size	Number	Revision
A4		
Date:	2022/7/2	Sheet of
File:	E:\ZYNO\01 POWER&UART.SchDoc	Drawn By:


CORE_IO

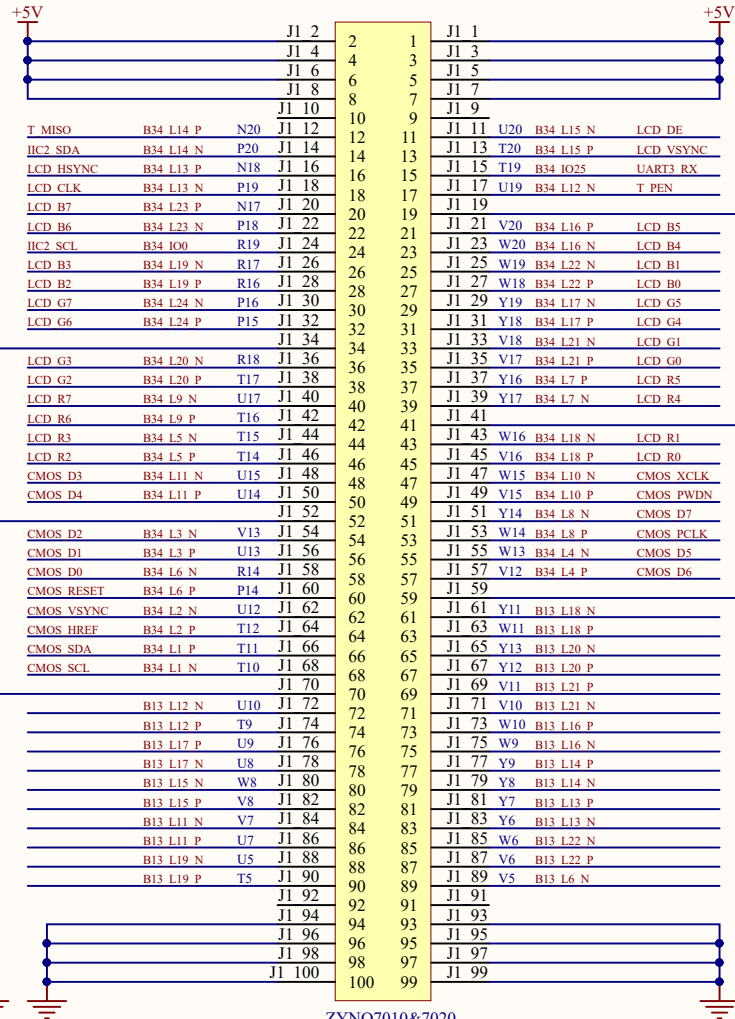

ZYNQ7010&7020


对应连接器下侧

M1

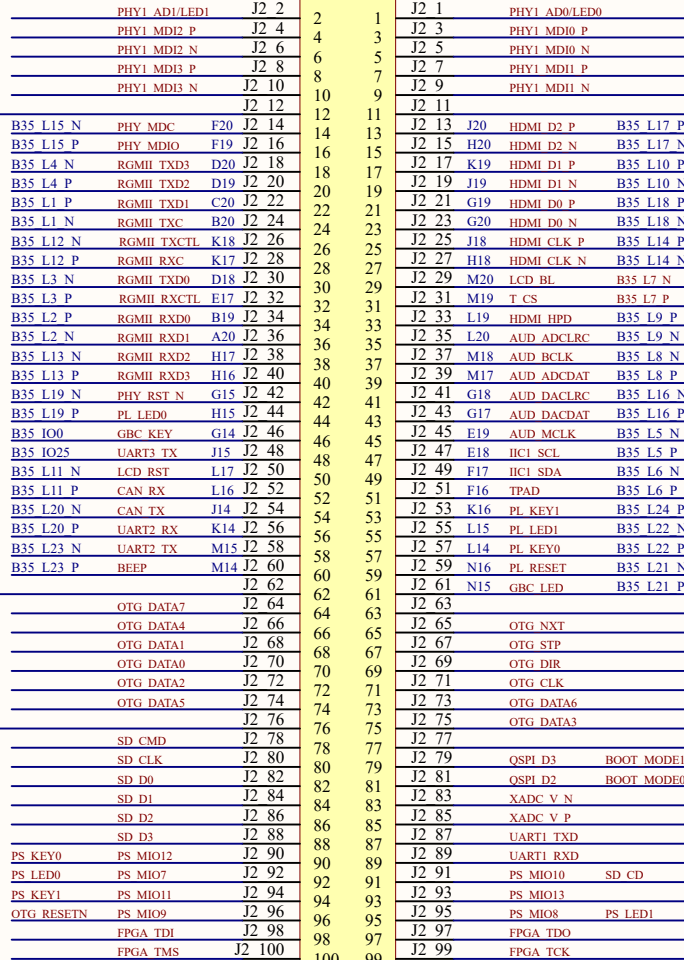

对应连接器上侧


EXT_IO

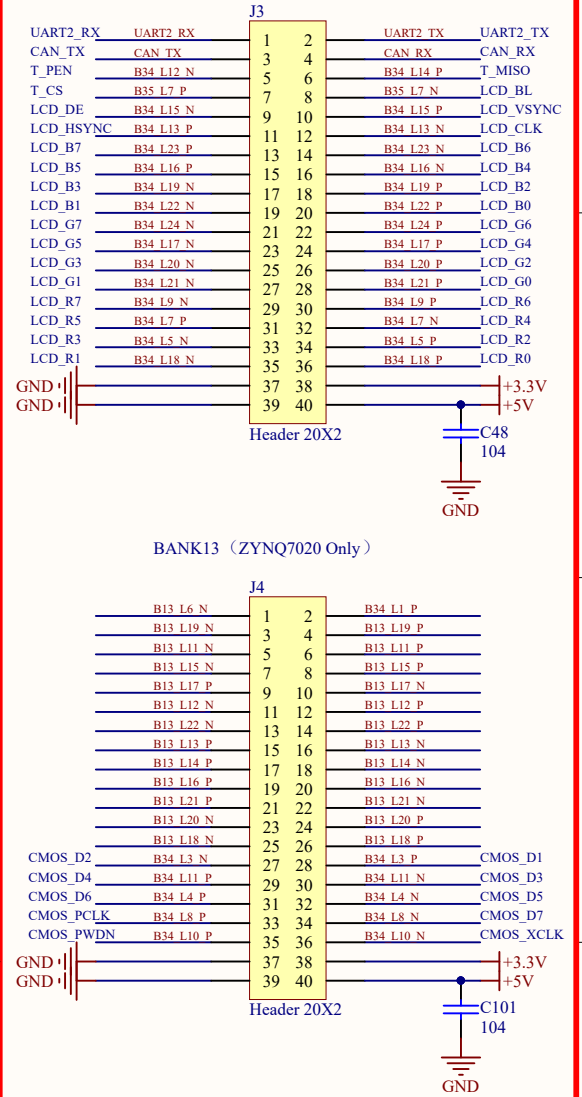


Title

Size	Number	Revision
A4		
Date:	2022/7/2	Sheet of
File:	E:\ZYNQ\02 IO.SchDoc	Drawn By:


RS232

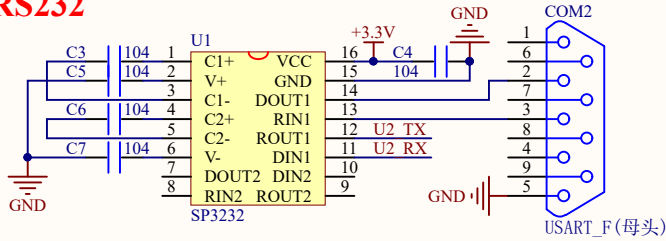


RGB LCD

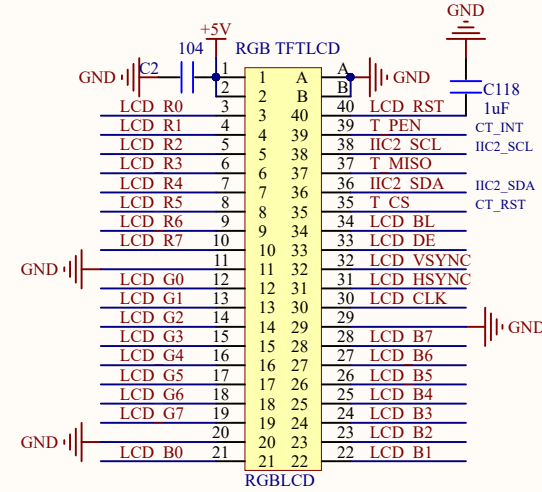


OLED&CAMERA

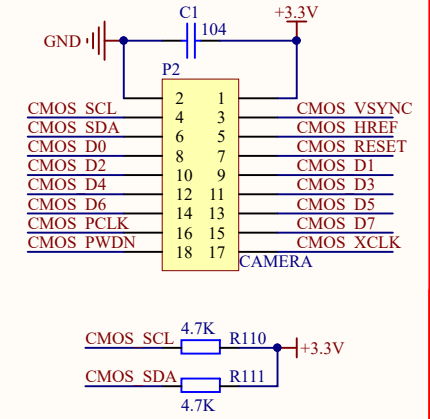


RS485

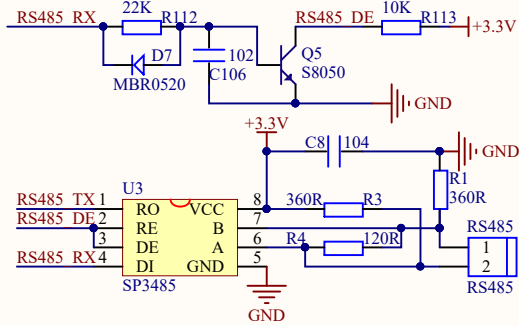


CAN

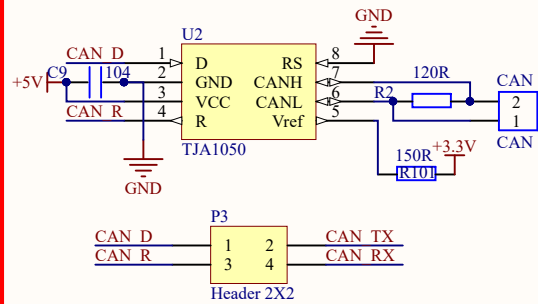


ATK MODULE




EEPROM

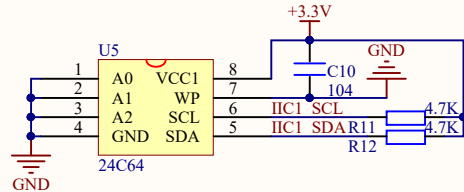


LED




KEY




JTAG

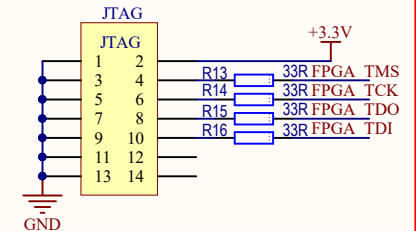


RTC

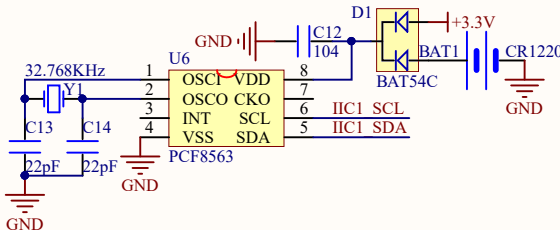

TOUCH KEY

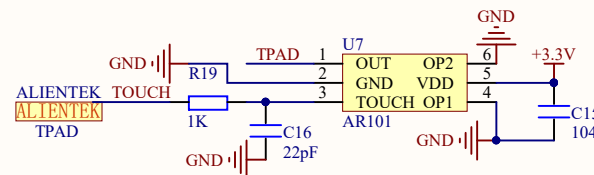


BEEP




Title		
Size	Number	Revision
A4		
Date:	2022/7/2	Sheet of
File:	E:\ZY\NQ\03_DEVICE\SchDoc	Drawn By:


ETHERNET(PS)

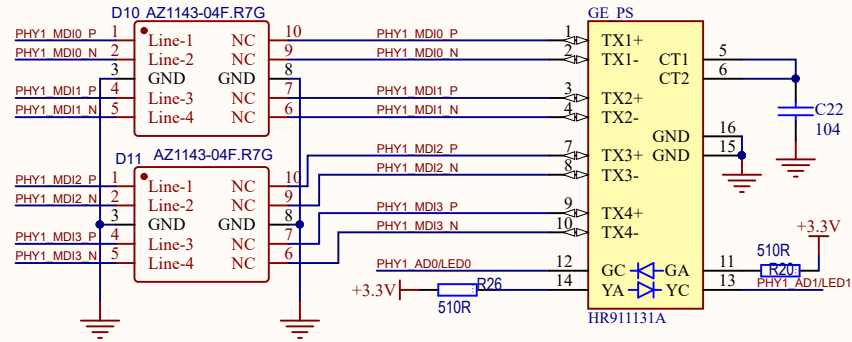


SD CARD

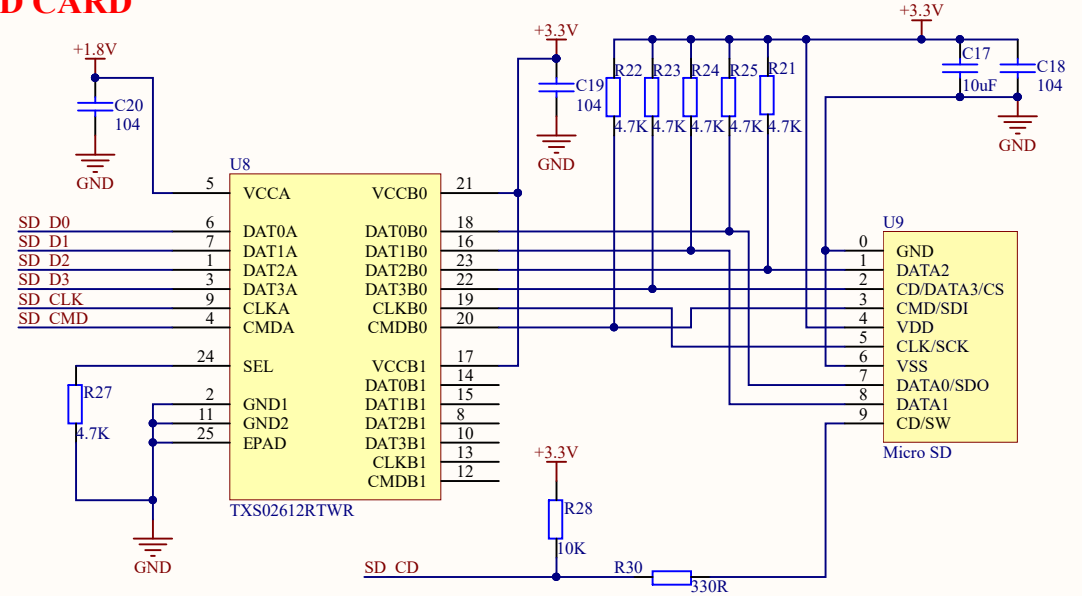

AUDIO

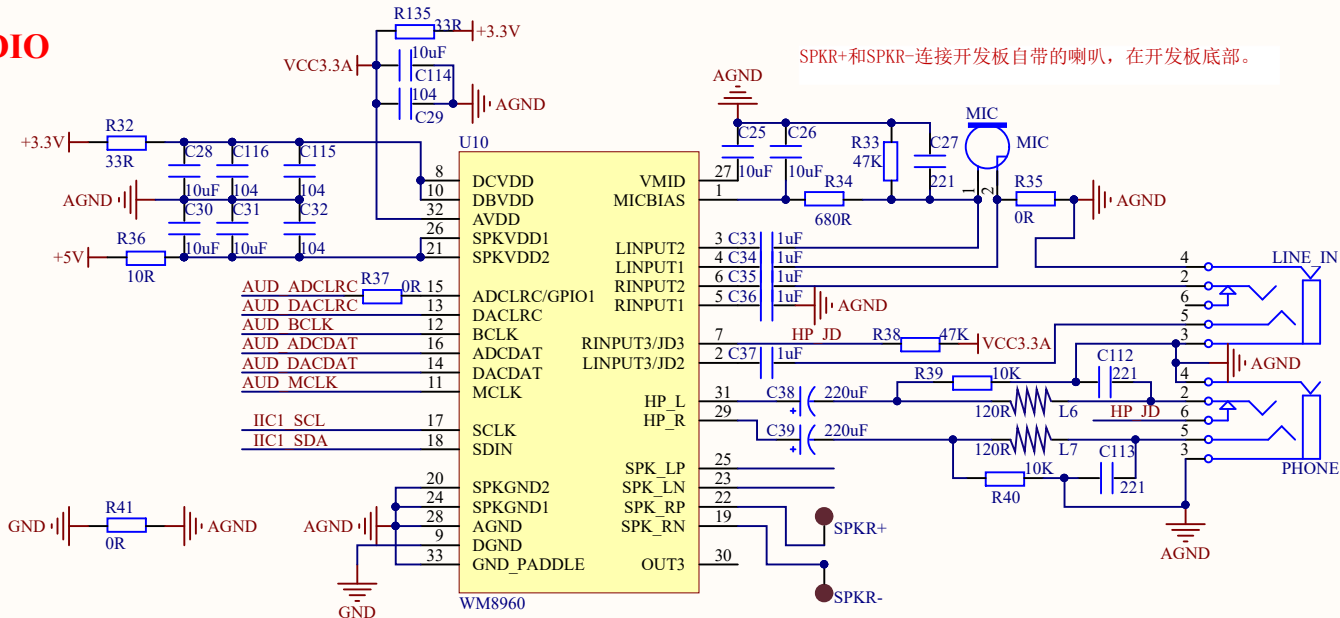

BOOT OPTION

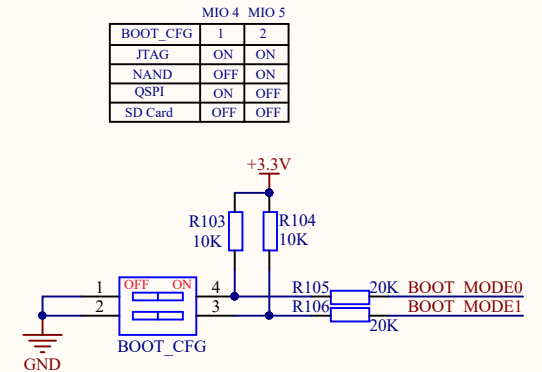

Title

Size	Number	Revision
A4		
Date:	2022/7/2	Sheet of
File:	E:\ZY\NQ\04 ETH&SD&AUDIO.SchDoc	Drawn By:

ETHERNET

Power on Strapping Pins





LED_ACT(IPU)	PHY_ADDR(2)	PHY_ADDR(2)	PHY address 00100b
RXD1(IPD)	PHY_ADDR(1)	PHY_ADDR(1)	
RXD0(IPD)	PHY_ADDR(0)	PHY_ADDR(0)	
RXD3(IPD)	MODE_SEL(1)	01=force low power mode;	Normal mode
LED_1000(IPU)	MODE_SEL(0)	11=normal mode;	
RXD2(IPD)	PLLON	0=PLL OFF in hibernation; 1=PLL ON in hibernation;	PLL OFF in hibernation
RX_DV(IPD)	3.3V/2.5V_SEL	0=RGMII IO 3.3V; 1=RGMII IO 2.5V;	3.3V RGMII
LED_10_100(IPU)	RXC_delay_en	0=RXC delay disable; 1=RXC delay enable;	RXC delay enable
RX_CLK(IPD)	CLK_25M_en	0=CLK_25M enable; 1=CLK_25M disable;	CLK_25M output enable

LED_ACT(IPU)	PHY_ADDR(2)	
RXD1(IPD)	PHY_ADDR(1)	PHY Addr=00000+PHYA(2:0)
RXD0(IPD)	PHY_ADDR(0)	
RXD3(IPD)	MODE_SEL(1)	01=force low power mode;
LED_1000(IPU)	MODE_SEL(0)	11=normal mode;
RXD2(IPD)	PLLON	0=PLL OFF in hibernation; 1=PLL ON in hibernation;
RX_DV(IPD)	3.3V/2.5V_SEL	0=RGMI1 IO 3.3V; 1=RGMI1 IO 2.5V;
LED_10_100(IPU)	RXC_delay_en	0=RXC delay disable; 1=RXC delay enable;
RX_CLK(IPD)	CLK_25M_en	0=CLK_25M enable; 1=CLK_25M disable;

LED_ACT(IPU)	PHY_ADDR(2)	
RXD1(IPD)	PHY_ADDR(1)	PHY Addr=00000+PHYA(2:0)
RXD0(IPD)	PHY_ADDR(0)	
RXD3(IPD)	MODE_SEL(1)	01=force low power mode;
LED_1000(IPU)	MODE_SEL(0)	11=normal mode;
RXD2(IPD)	PLLON	0=PLL OFF in hibernation; 1=PLL ON in hibernation;
RX_DV(IPD)	3.3V/2.5V_SEL	0=RGMI1 IO 3.3V; 1=RGMI1 IO 2.5V;
LED_10_100(IPU)	RXC_delay_en	0=RXC delay disable; 1=RXC delay enable;
RX_CLK(IPD)	CLK_25M_en	0=CLK_25M enable; 1=CLK_25M disable;


Title			
Size A4	Number	Revision	
Date:	2022/7/2	Sheet	of
File:	E:\ZY\NQ\...05 ETH.SchDoc	Drawn By:	

HDMI

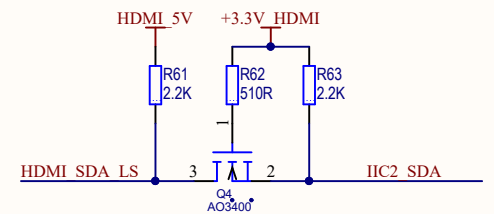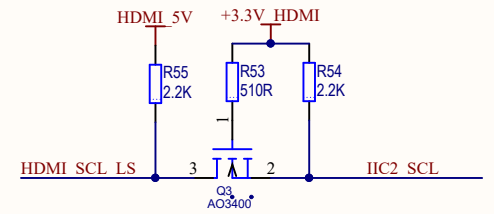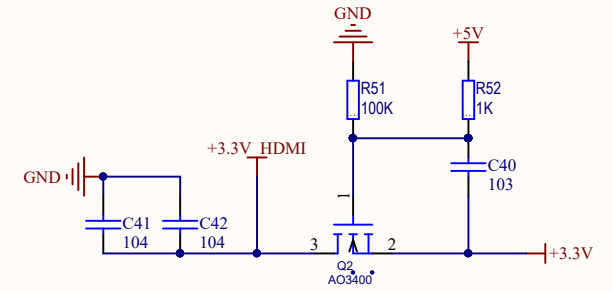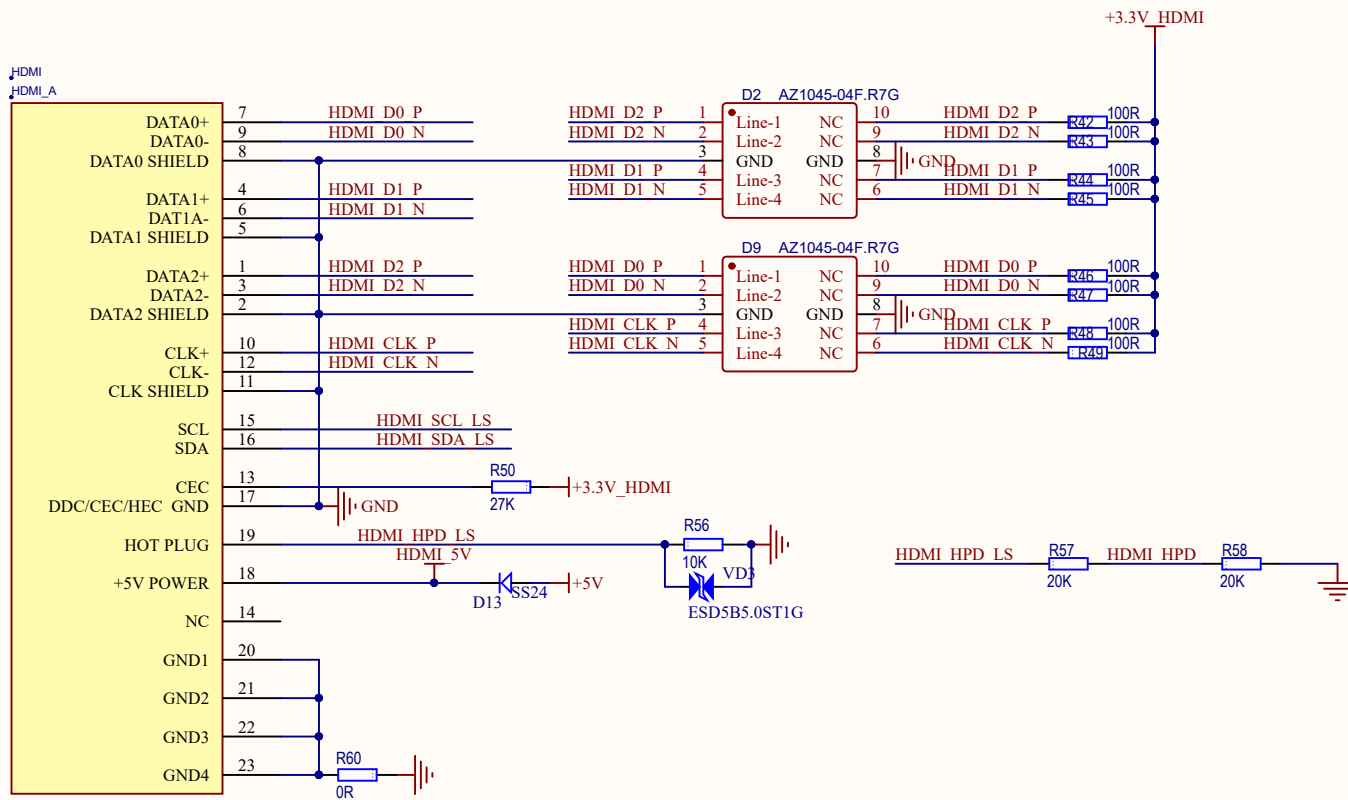

Title			
Size	Number		Revision
A4			
Date:	2022/7/2		Sheet of
File:	E:\ZYNQ\..06 HDMI.SchDoc		Drawn By:


USB OTG

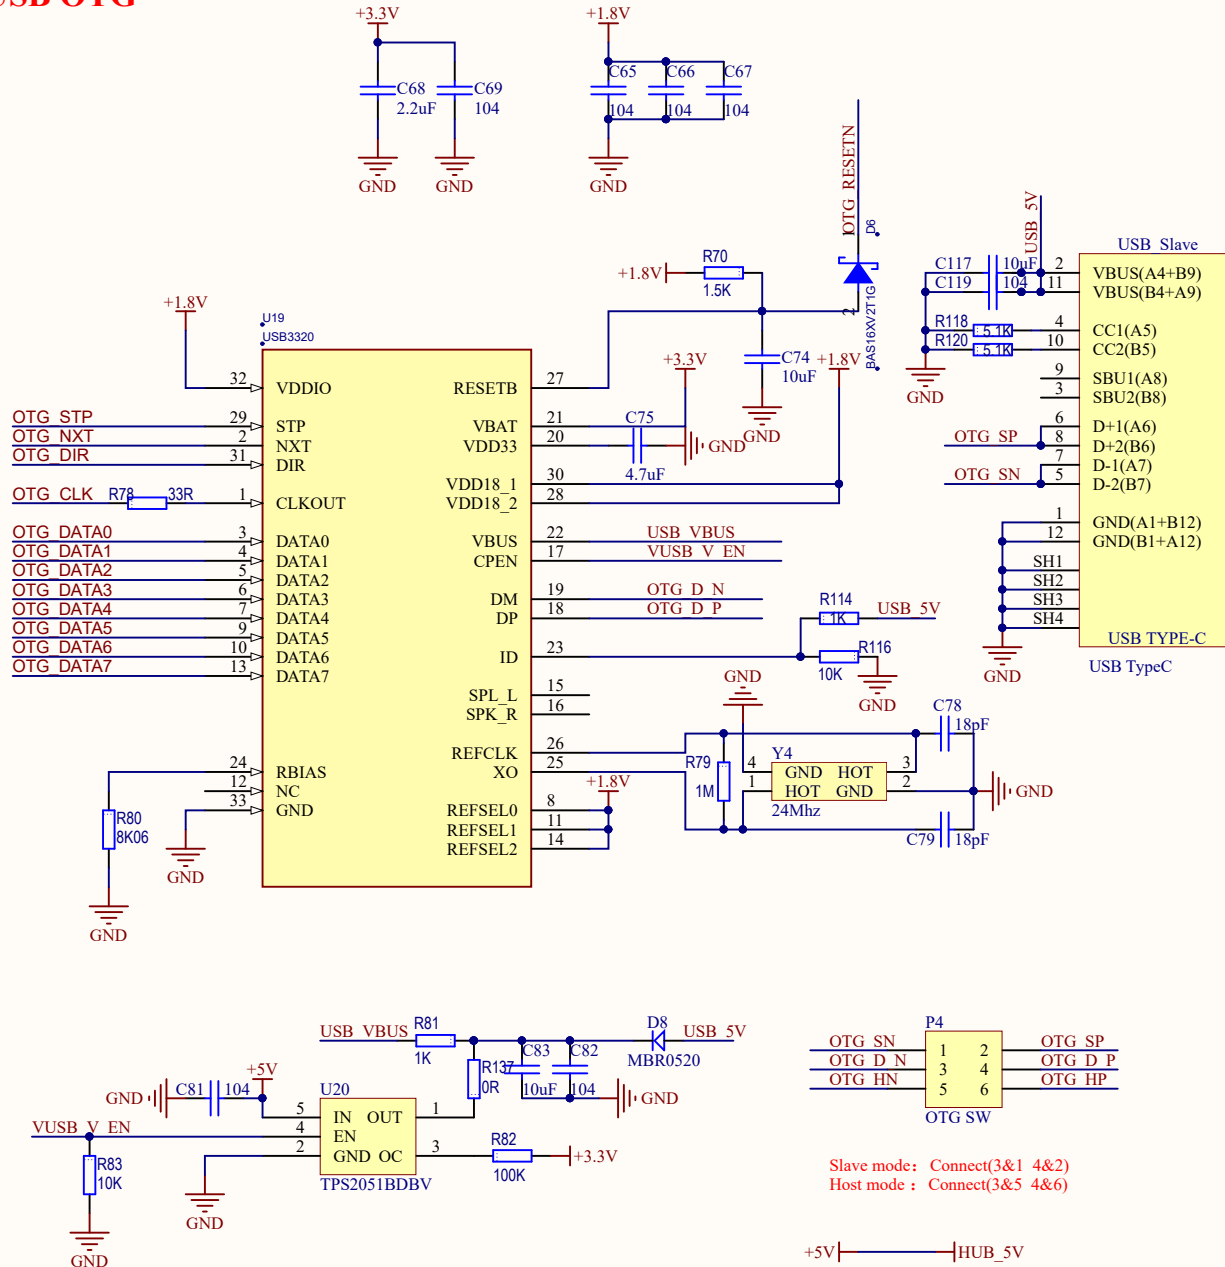

Slave mode: Connect(3&1 4&2)
Host mode : Connect(3&5 4&6)

+5V |-----| HUB_5V

USB HUB

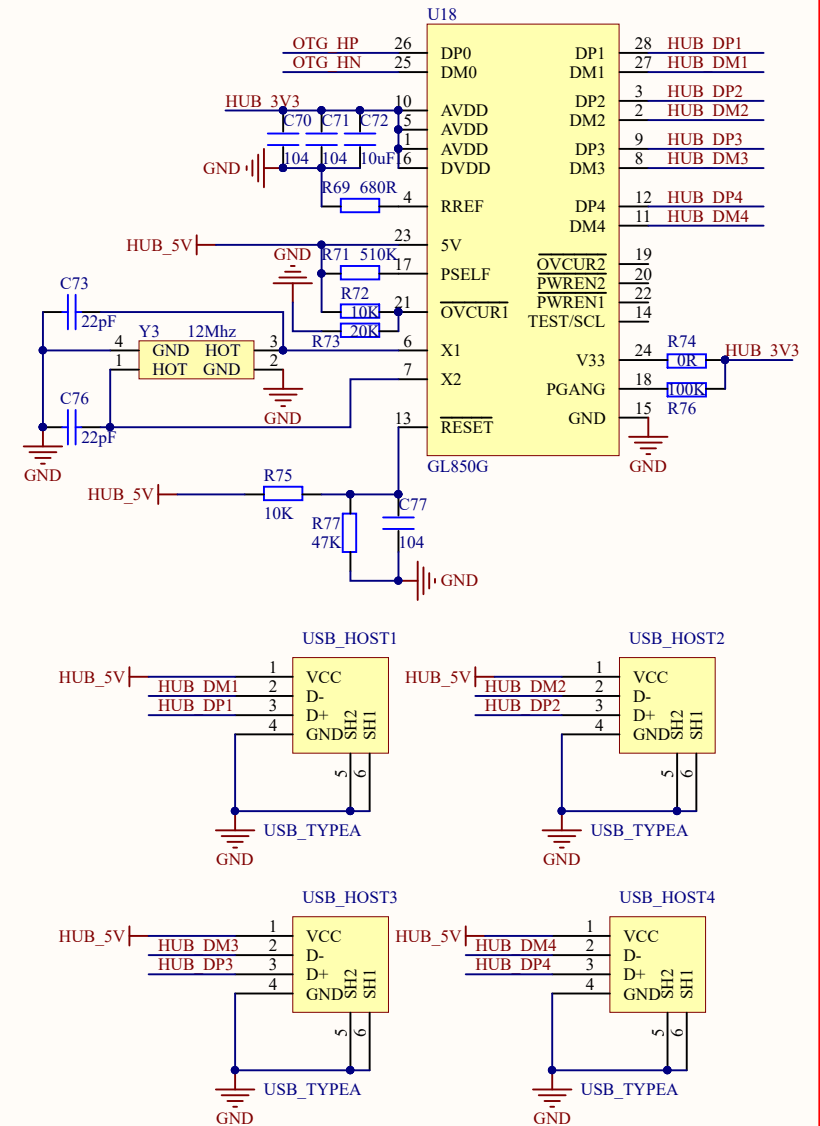

Title
USB OTG

Size	Number	V1.0	Revision
A4			
Date:	2022/7/2	Sheet	of
File:	E:\ZY\NQ\07 USB.SchDoc	Drawn By:	