


确认此型号所有图纸 签字确认:

VER.	DESCRIPTION	DATE
00	FIRST PUBLICATION	15-02-2019

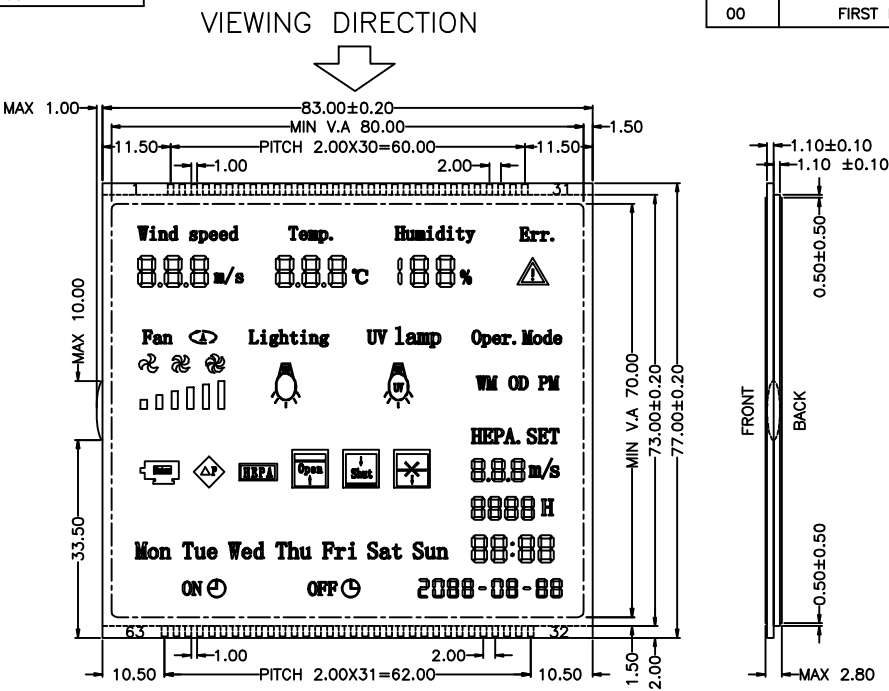

SPECIFICATIONS

DISPLAY MODE : HTN, NEGATIVE MODE  
DRIVE CONDITION : 1/4 DUTY, 1/3 BIAS, 3.3 V, 64Hz  
VIEWING DIRECTION : 12 O'CLOCK  
OPERATING TEMP : -10°C TO +60°C  
STORAGE TEMP : -20°C TO +70°C  
FRONT POLARIZER : TRANSMISSIVE, ADHESIVE  
BACK POLARIZER : TRANSMISSIVE, ADHESIVE  
CONNECTION TYPE : ZEBRA

深圳市万视达光电有限公司					
玻璃结构: 大片在上, 小片在下					
APPROVALS	DATE	MODEL NUMBER :		GENERAL TOL.	UNITS
APP		XH14909N1NA		0.20 MM	MM
CHK				CUSTOMER P/N	
DWN	XYT 15/02	DO NOT SCALE THIS DRAWING.	PROJECTION	SHEET:	1 OF 4