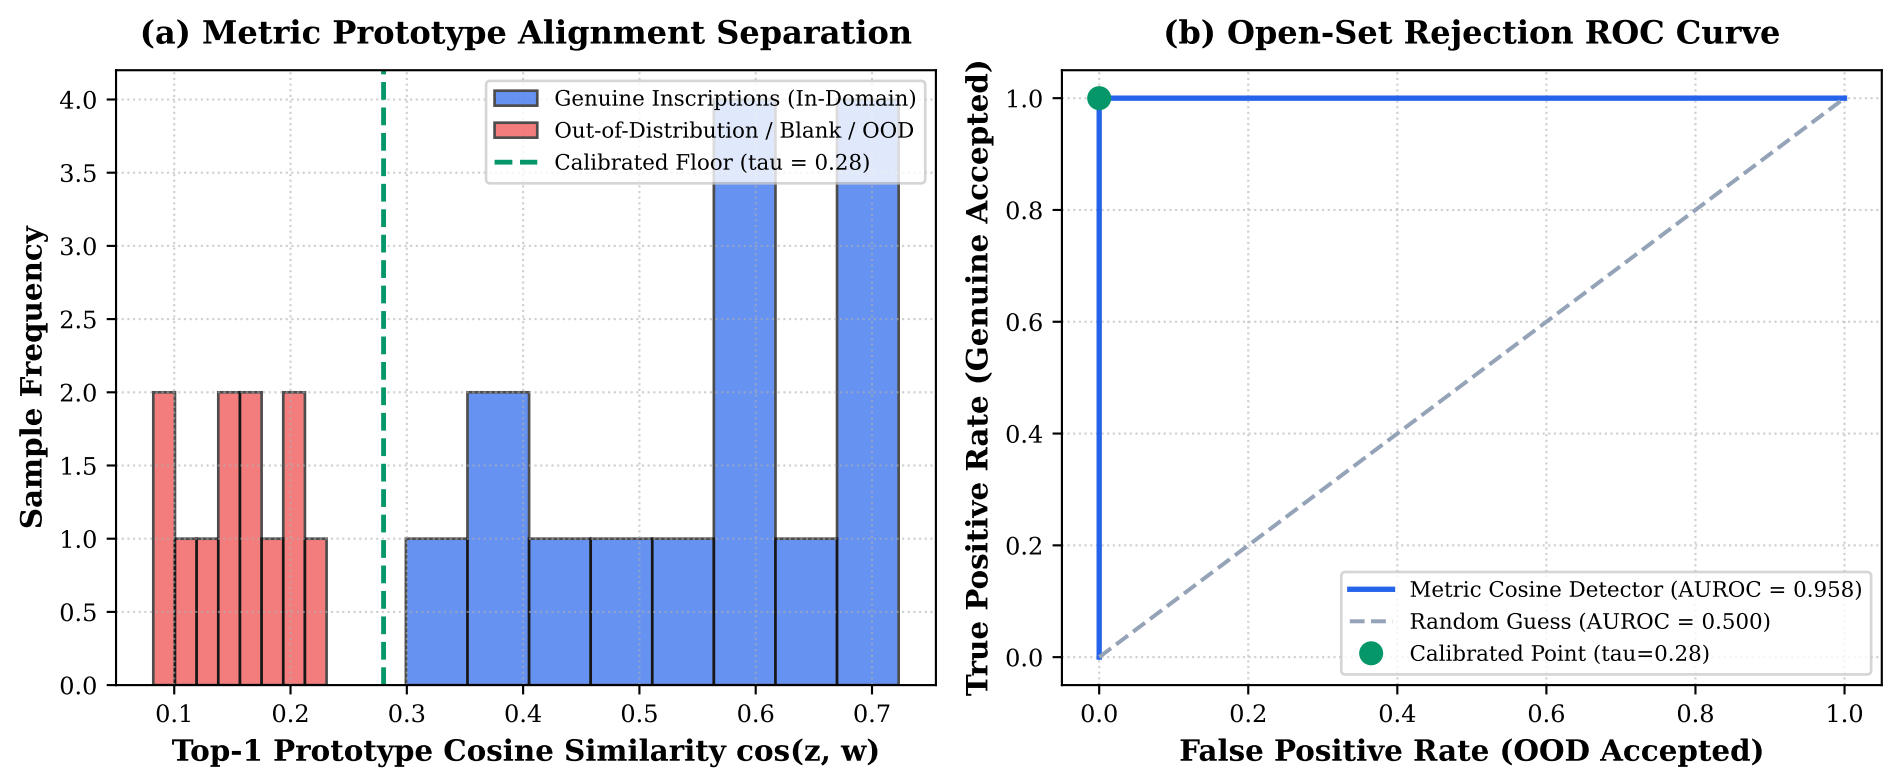
(a) Metric Prototype Alignment Separation
Genuine Inscriptions (In-Domain)
Out-of-Distribution / Blank / OOD
Calibrated Floor (tau = 0.28)
Sample Frequency
Top-1 Prototype Cosine Similarity cos(z, w)
(b) Open-Set Rejection ROC Curve
Metric Cosine Detector (AUROC = 0.958)
Random Guess (AUROC = 0.500)
Calibrated Point (tau=0.28)
True Positive Rate (Genuine Accepted)
False Positive Rate (OOD Accepted)