


SNAKE SW

640 x 512 - 15 μm pitch - InGaAs

→ THE NEW GENERATION
VGA InGaAs FPA SENSOR.

Snake SW is the new generation VGA InGaAs FPA sensor: a high-sensitivity and high-resolution FPA assembly designed for most demanding low flux imaging applications from 0.9 μm to 1.7 μm . Sofradir InGaAs technology exhibits outstanding performances in terms of dark current, uniformity and operability. Snake SW is well-adapted to a large range of applications such as night vision, surveillance, airborne gimbals and various industrial and scientific applications. This high-performance FPA assembly takes full advantage of Sofradir's state of the art technologies.

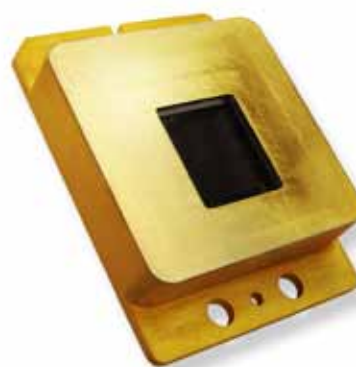

ARRAY FEATURES

• Sensor type	InGaAs PIN - Photodiode
• Format	640 × 512
• Pixel pitch	15 μm × 15 μm
• Waveband	0.9 μm to 1.7 μm (optional extended waveband = 0.4 μm to 1.7 μm)


ROIC (READ-OUT INTEGRATED CIRCUIT)

• Integration type	Snapshot
• Readout modes	IWR, ITR, NDR
• Integration time	1 μs to full frame
• Maximum full frame rate @ 9 MHz	100Hz / 180 Hz / 300Hz (2, 4 or 8 outputs)
• Maximum frame rate @ 9 MHz	30 KHz (windowing mode)
• Maximum pixel rate	18 MHz per output
• Full well	43 10 ³ e ⁻ (Gain 0) / 120 10 ³ e ⁻ (Gain 1) / 1.44 10 ⁶ e ⁻ (Gain 2)
• Output signal swing	2.3 V
• Input bias	1.8 V to 3.6 V
• Windowing	Programmable ($\geq 8 \times 4$ [2 output mode, 30 KFPS]; $\geq 16 \times 4$ [4 output mode, 30 KFPS]; $\geq 32 \times 4$ [8 output mode, 30 KFPS])
• Temperature sensor output	Yes

SNAKE SW

640 x 512 - 15 μm pitch - InGaAs

→ THE NEW GENERATION
VGA InGaAs FPA SENSOR.



TYPICAL (*) PERFORMANCES

Quantum efficiency [QE]	> 70% from 1 μm to 1.6 μm (**)
Noise with ROIC	30 e ⁻ (Gain 0)
Dark current	30 fA @ 0.2 V detector bias
Operability	99.7% (***)
Non uniformity without correction	4 %

PACKAGING

Dimension (W x H x D)	42 mm x 30 mm x 9 mm
Windows	Sapphire
Number of pins	28 Standard 1/10 inch pin pitch
Cooler	Single stage TE Cooler (8.4W)
Packaging characteristics	Hermetically sealed
Operation temperature	From - 40° C to 71° C
Storage temperature	From - 40° C to 71° C

(*) Typical = Expected production mean value.

(**) Optional extended waveband : 40% @ 0.5 μm , 75% @ 0.8 μm , > 80% from 0.9 μm to 1.6 μm

(***) The fraction of pixels with responsivity deviation less than +/- 30 % from the mean.

APPLICATIONS



Technical characteristics described in this data sheet are for information only.
They are not contractual and may change without prior notice.

SOFRADIR HEADQUARTERS

Avenue de la Vauve - CS 20018
91127 Palaiseau - France
Phone + 33 1 60 92 18 30
Fax + 33 1 60 92 18 40

DEVELOPMENT AND PRODUCTION CENTER

Z.I. - BP 21
38113 Veurey-Voroize - France
Phone + 33 4 76 28 77 00
Fax + 33 4 76 53 85 97


SOFRADIR
Sensing your future
www.sofradir.com