
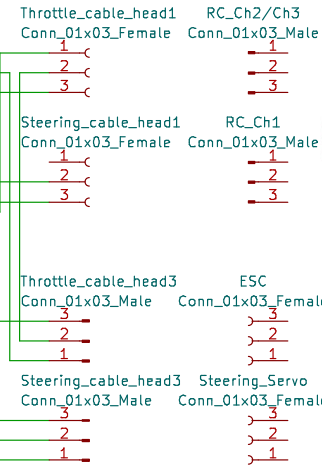



I/O Board

Cable Harness

Pin 1 on the 2-pin tabbed headers (e.g. 640456-2, 644752-2) are on the LEFT when viewed with the tab facing the viewer and on the top (See illustration).

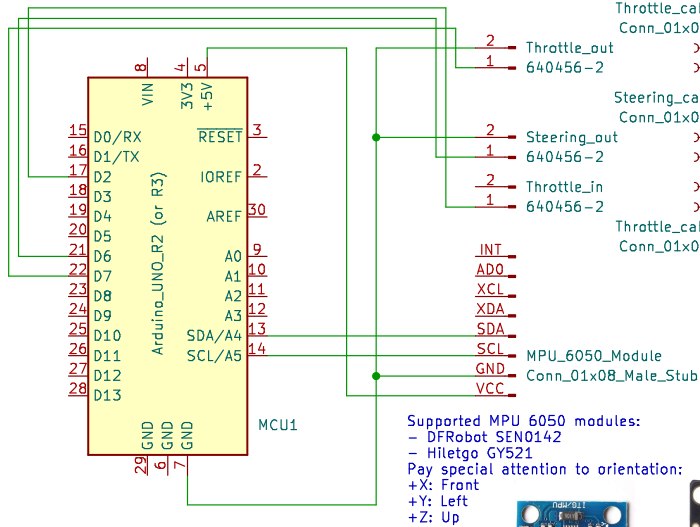

3-Wire PWM line conventions:

- Pin 1: White wire, PWM signal
- Pin 2: Red wire, +5V
- Pin 3: Black wire, GND

Radio Control:

- Ch1/Ch2: Steering wheel + Trim
- Ch3: Trigger
- Ch4+: Void

