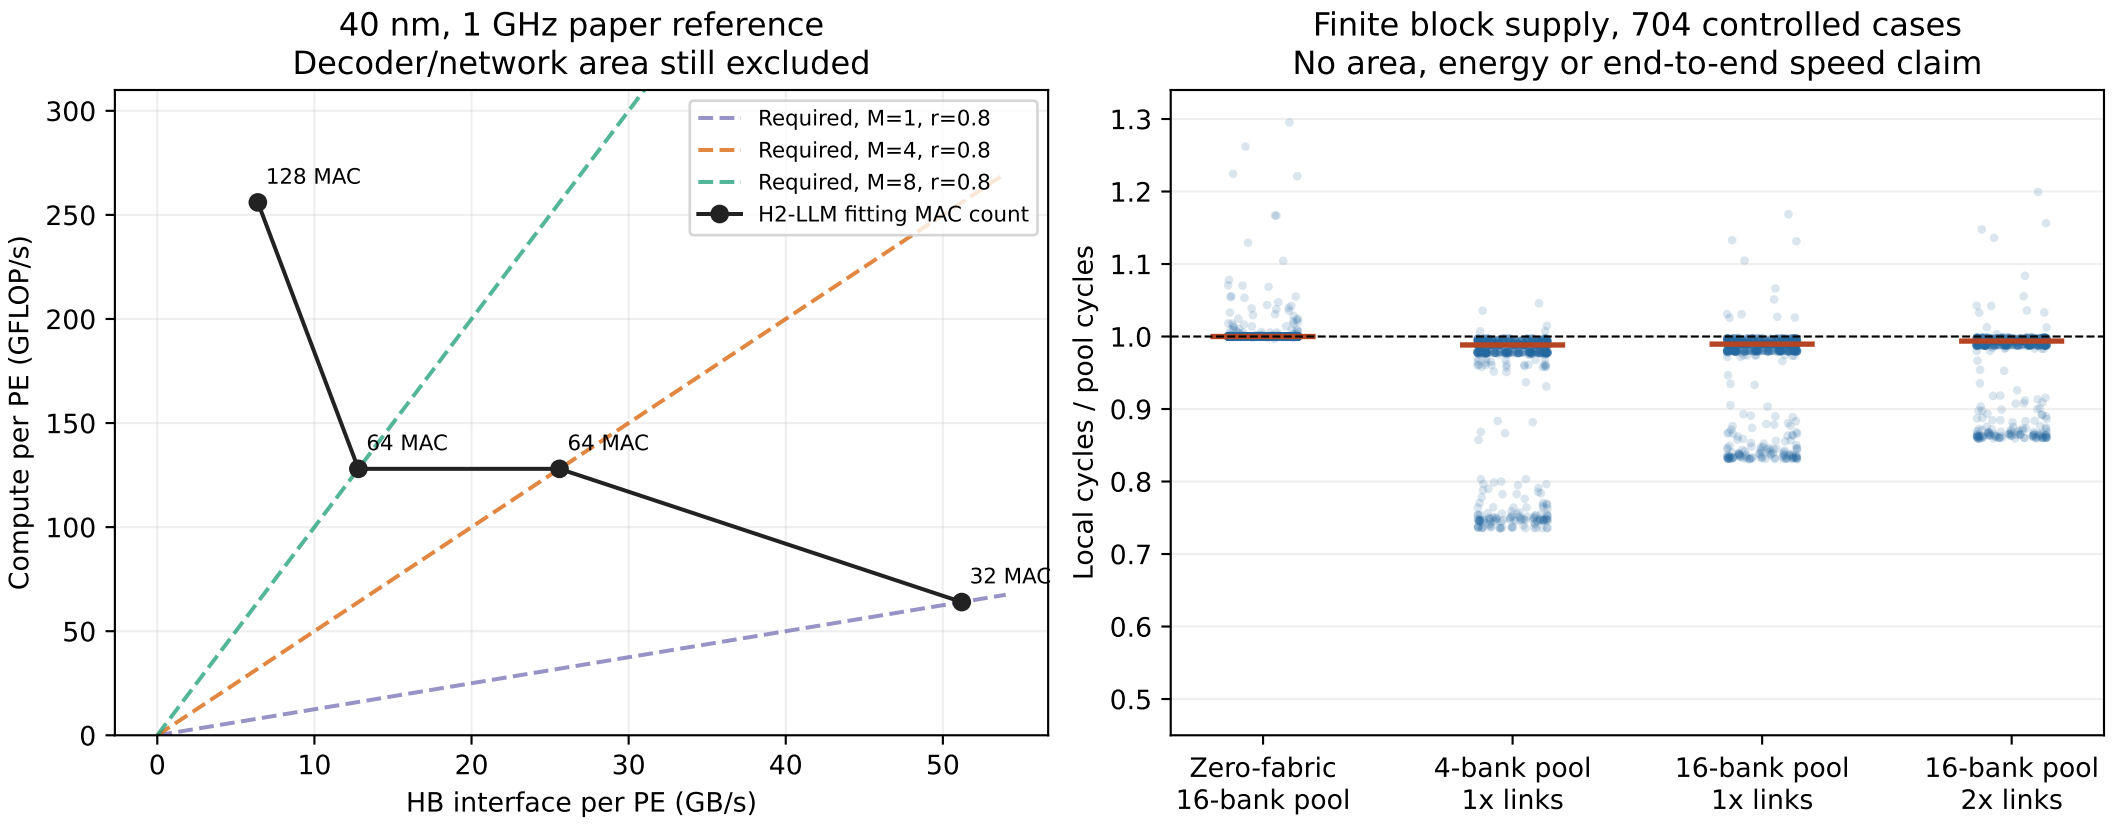
40 nm, 1 GHz paper reference
Decoder/network area still excluded
Required, M=1, r=0.8
Required, M=4, r=0.8
Required, M=8, r=0.8
H2-LLM fitting MAC count
128 MAC
64 MAC
64 MAC
32 MAC
Compute per PE (GFLOP/s)
HB interface per PE (GB/s)
0
50
100
150
200
250
300
0
10
20
30
40
50
Finite block supply, 704 controlled cases
No area, energy or end-to-end speed claim
Local cycles / pool cycles
0.5
0.6
0.7
0.8
0.9
1.0
1.1
1.2
1.3
Zero-fabric
16-bank pool
4-bank pool
1x links
16-bank pool
1x links
16-bank pool
2x links