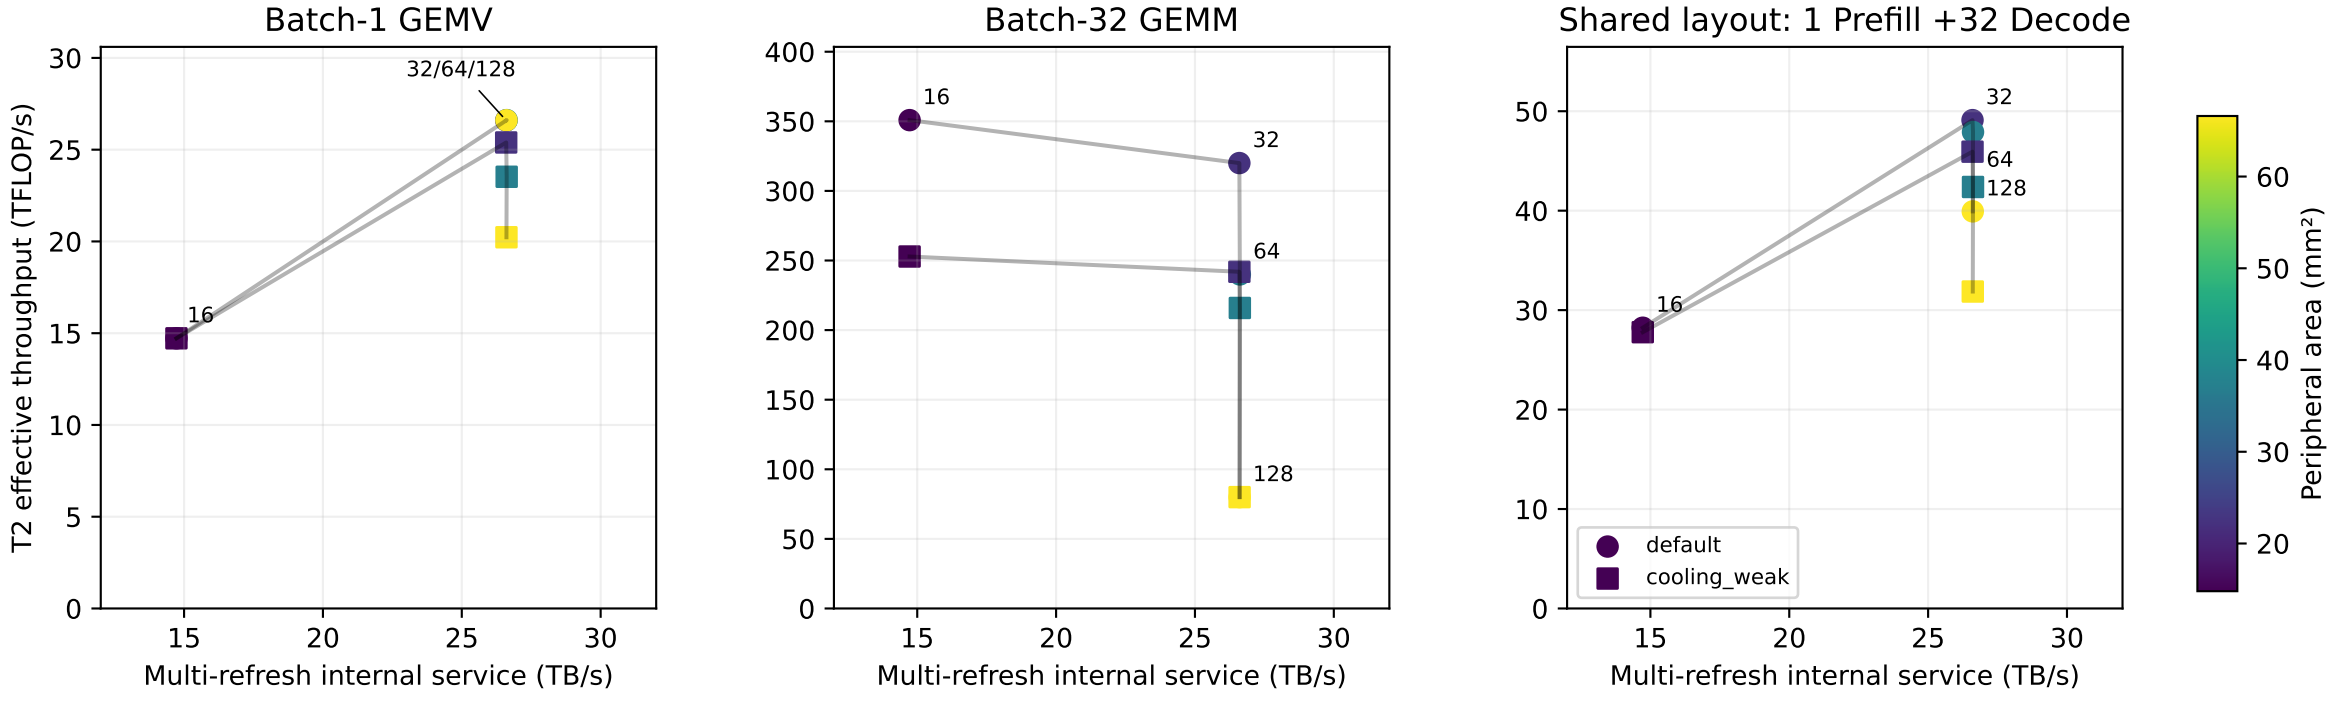
Bandwidth–Area–Thermal tradeoff; labels =default K
Temperature-constrained LP, not chip measurements
Batch-1 GEMV
Batch-32 GEMM
Shared layout: 1 Prefill +32 Decode
T2 effective throughput (TFLOP/s)
Multi-refresh internal service (TB/s)
Peripheral area (mm²)
32/64/128
16
32
64
128
default
cooling_weak