3D-MODEL:1111122420 PSM ASY

BASE CAGE DETAILS

(APPLIES TO ALL CAGES IN THIS DRAWING)

747540420

SHOWN

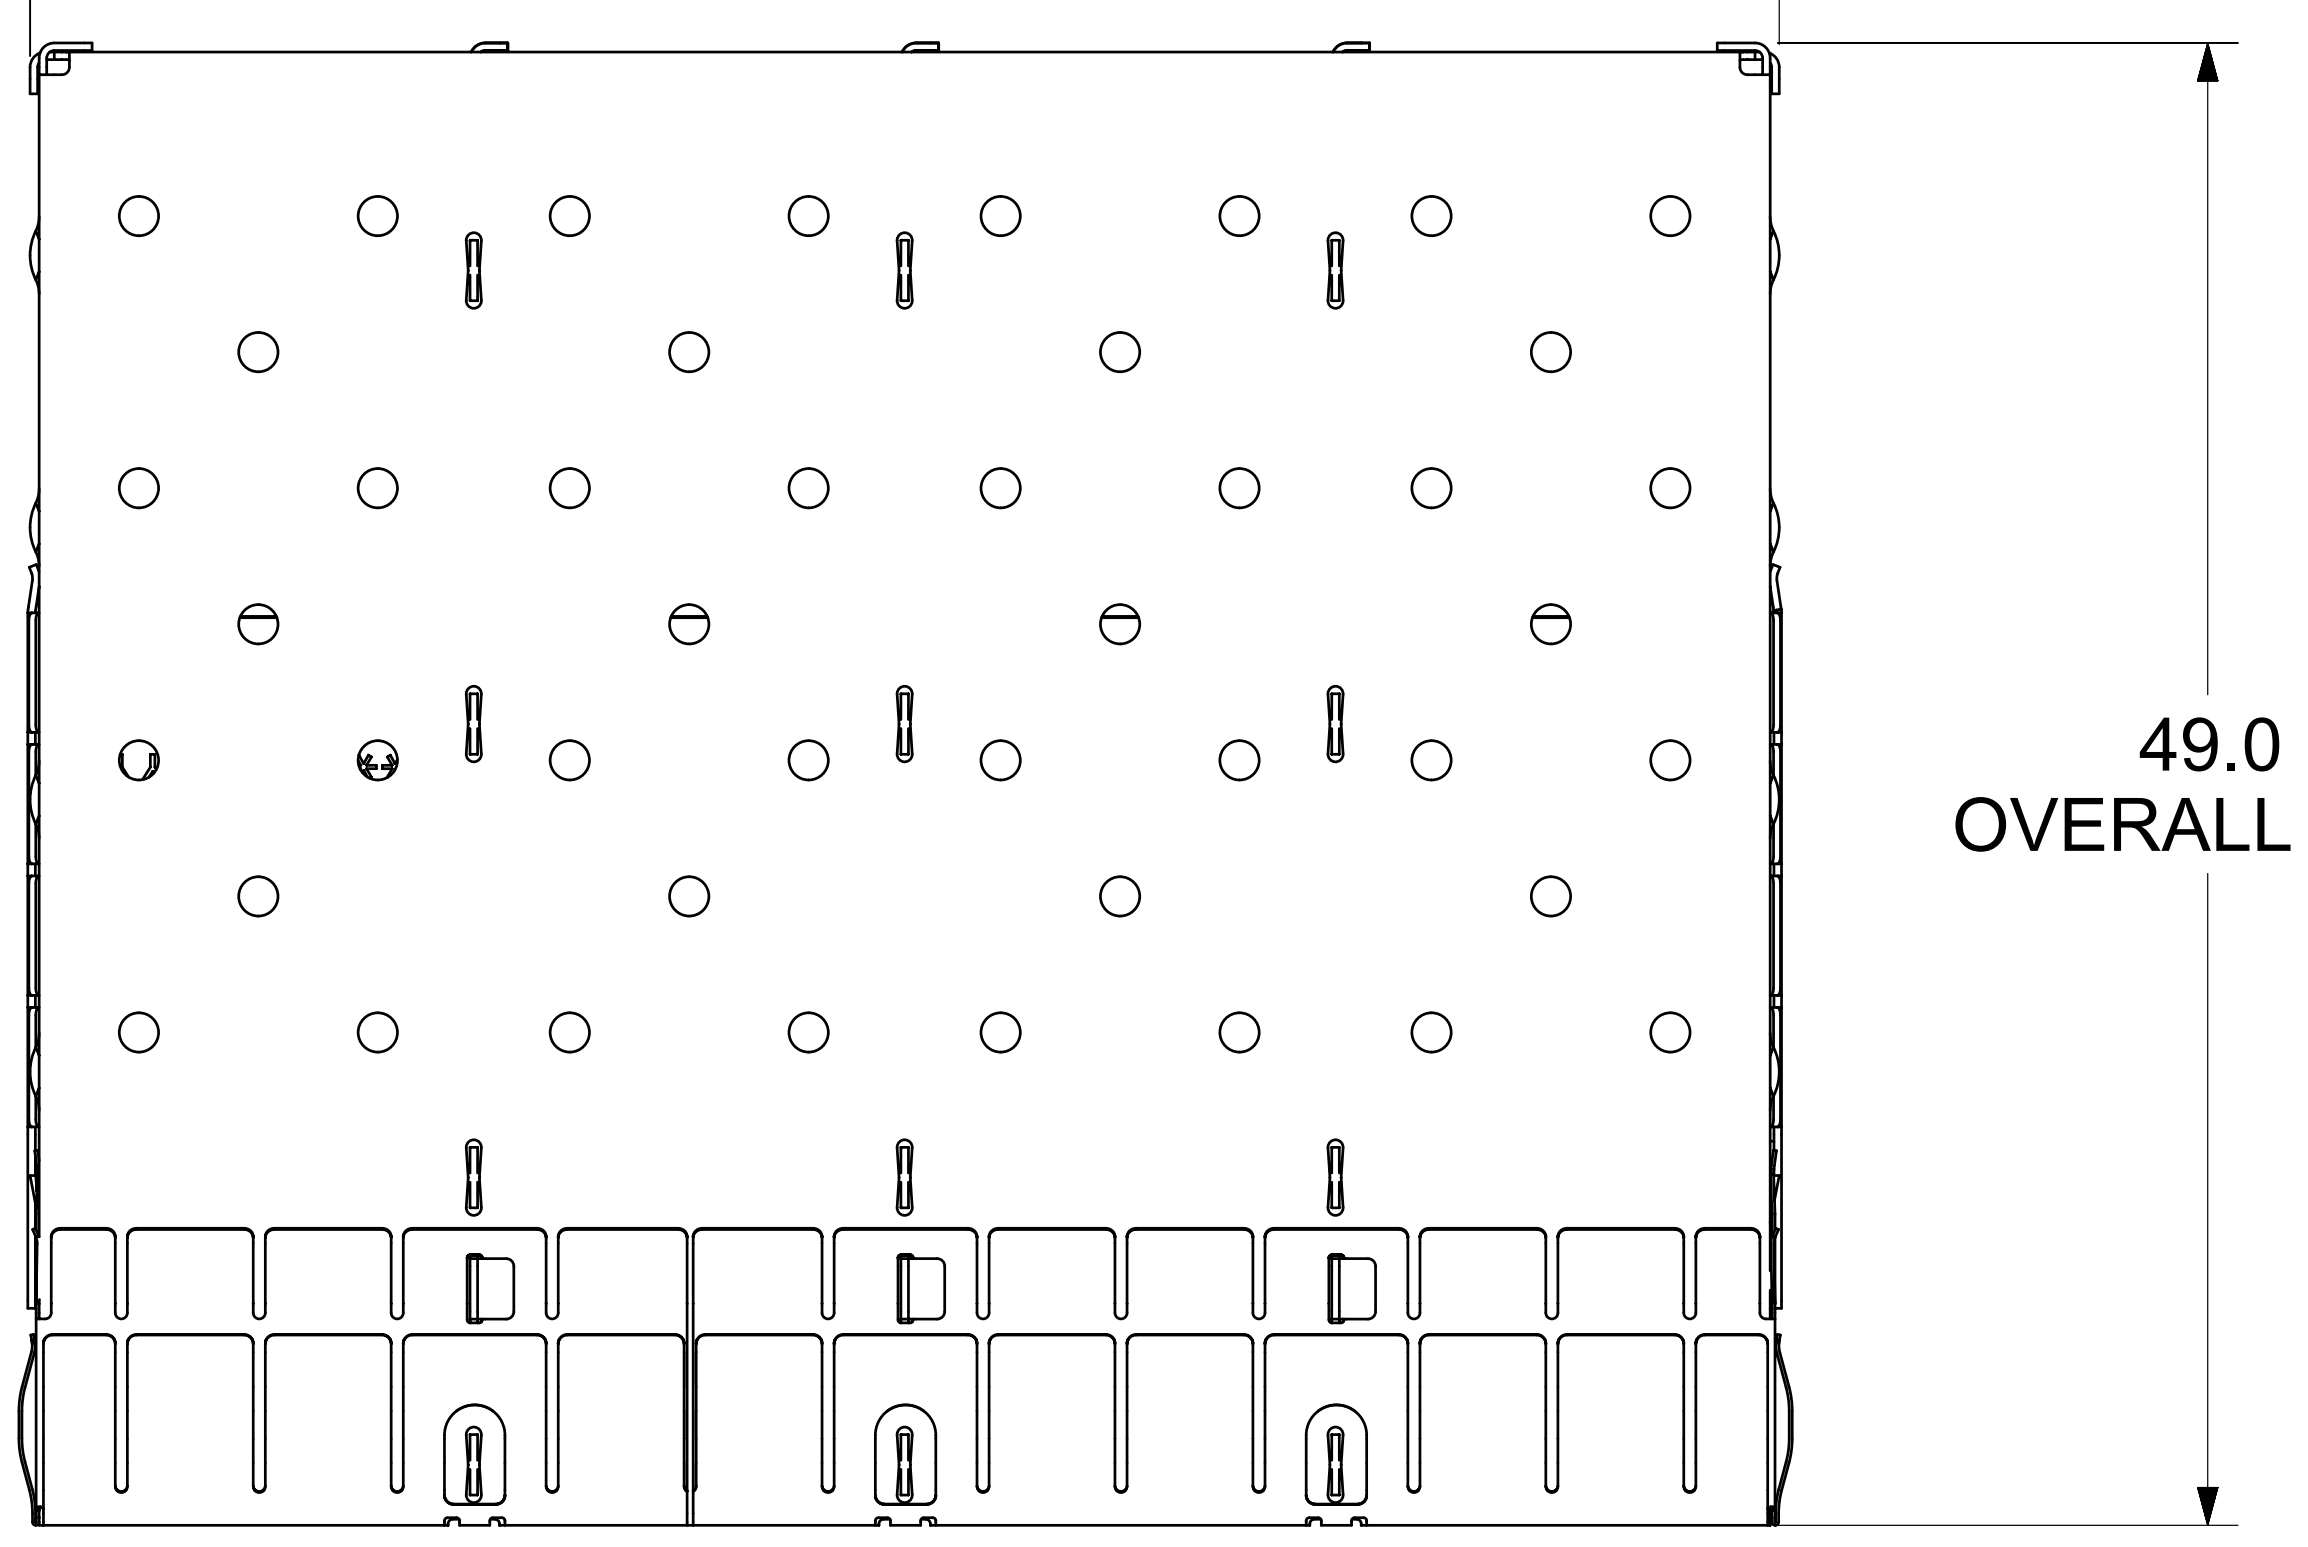

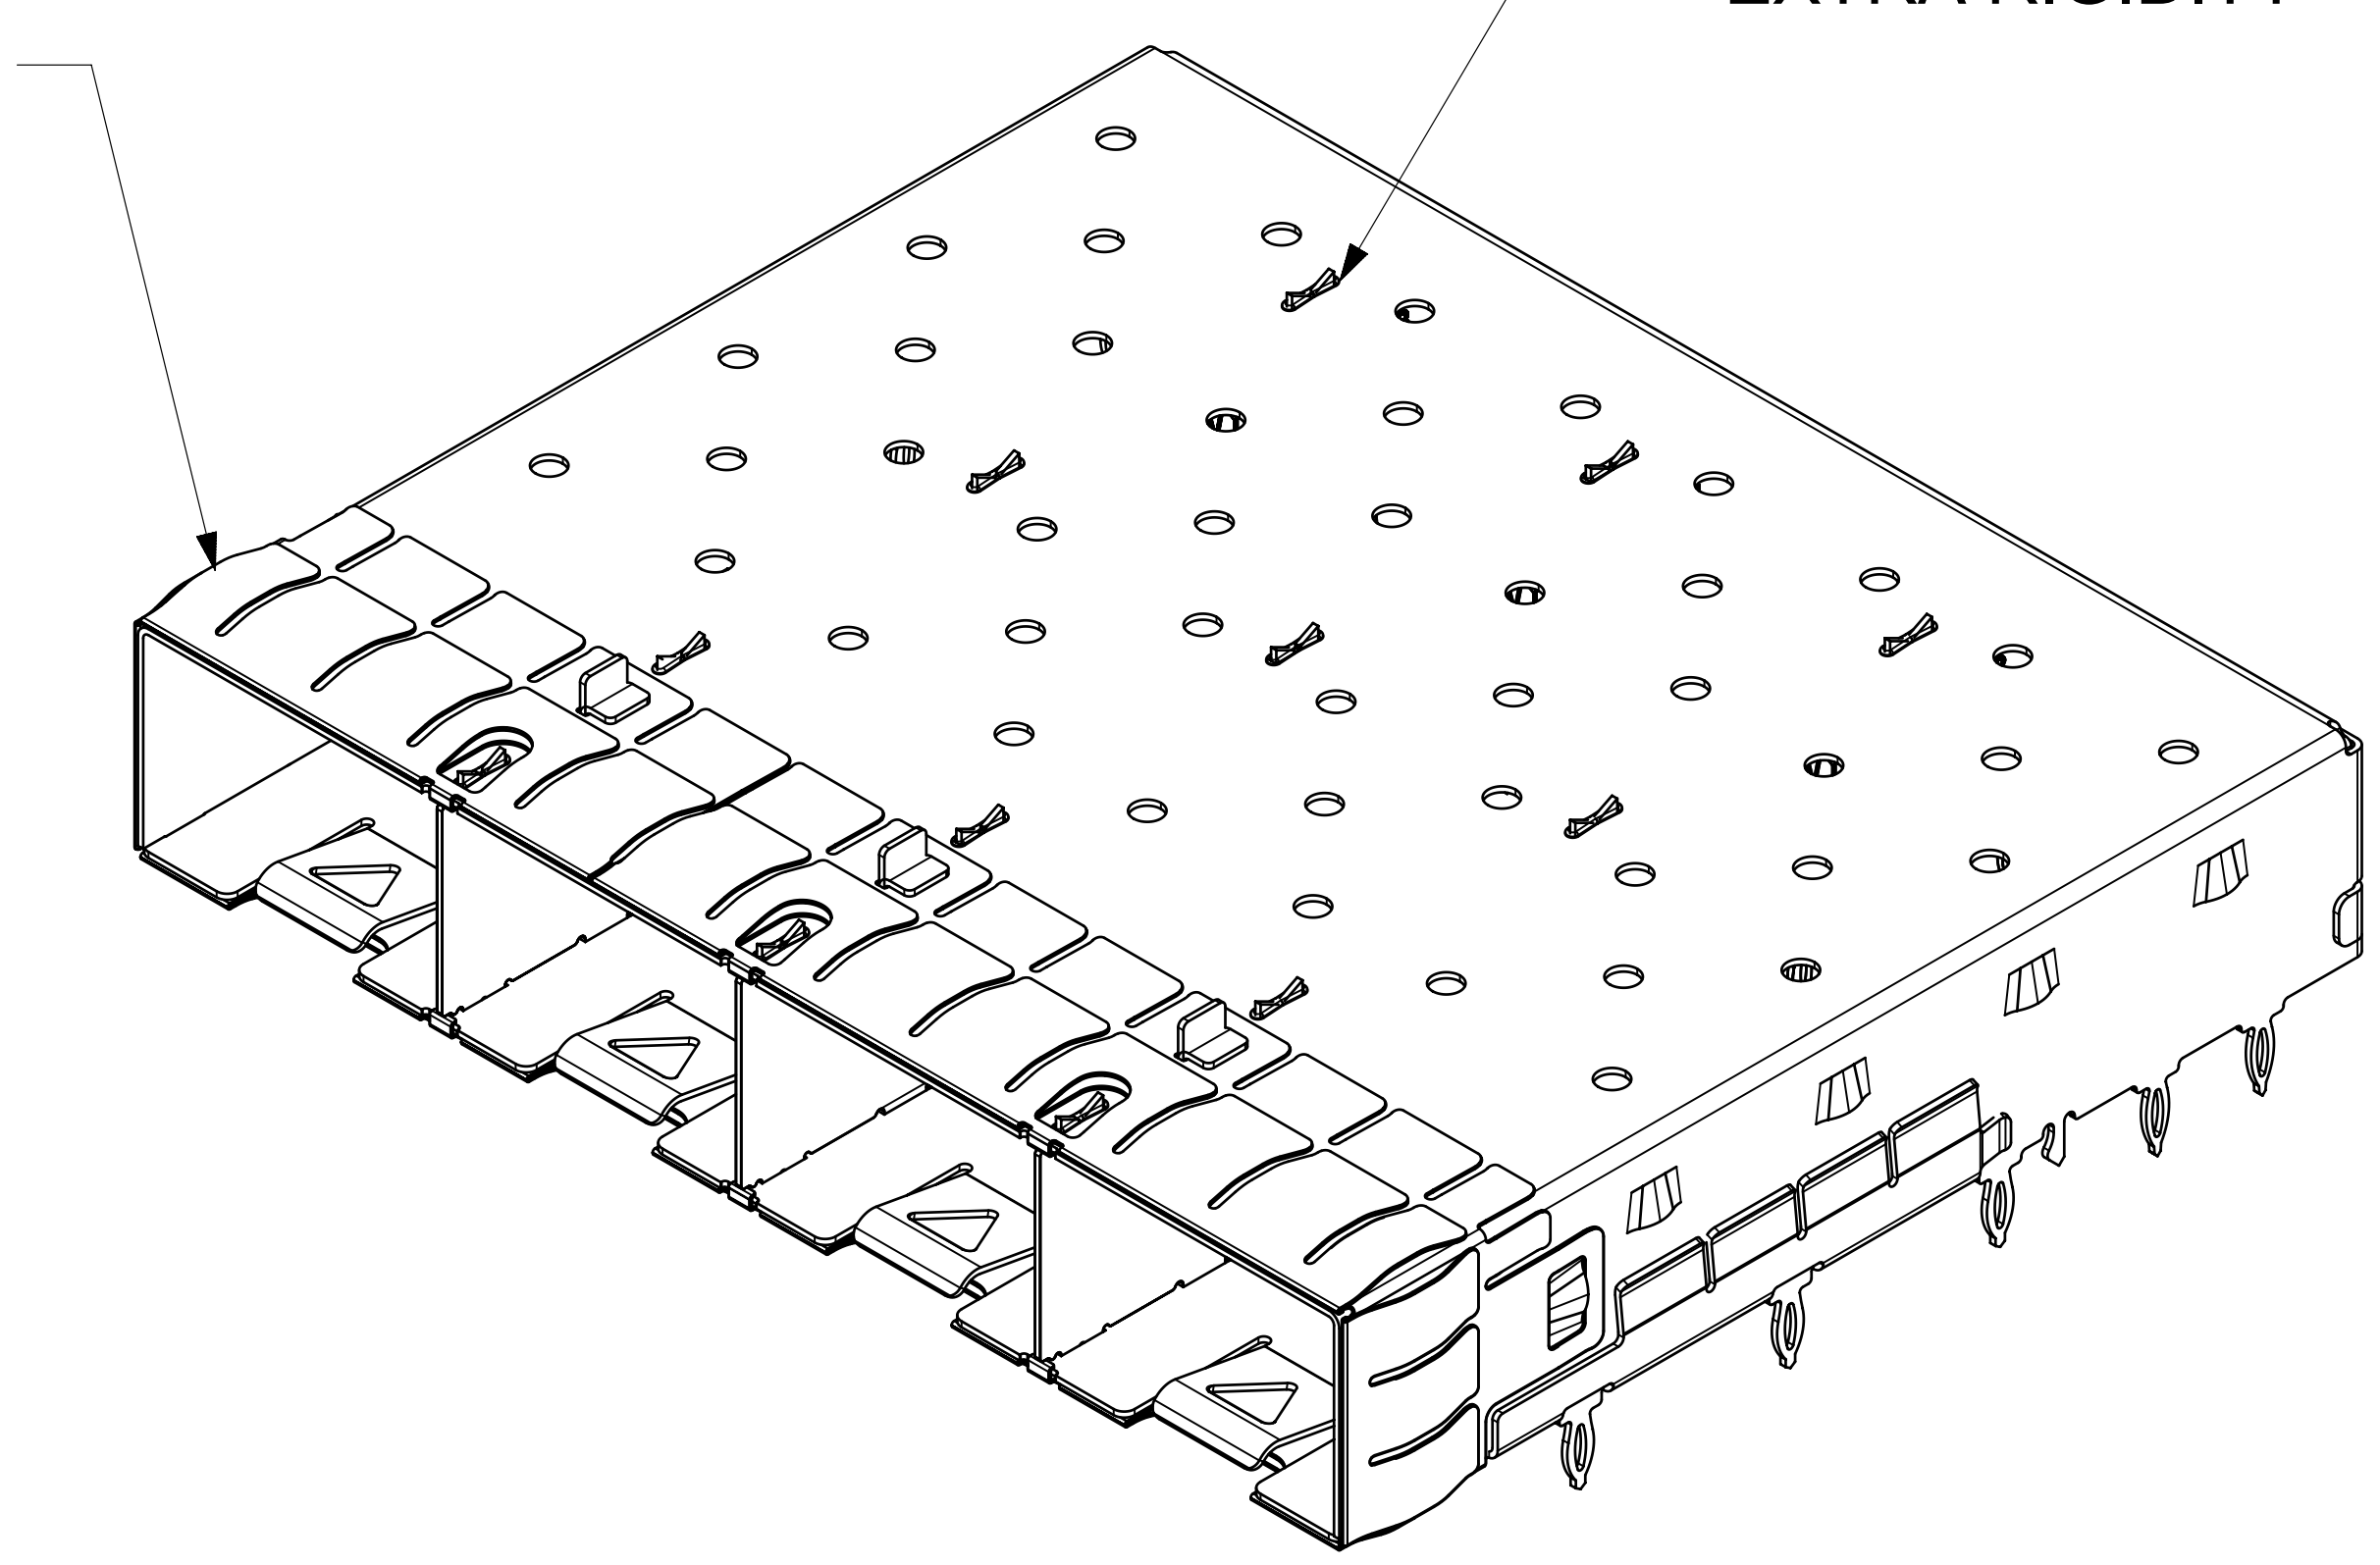

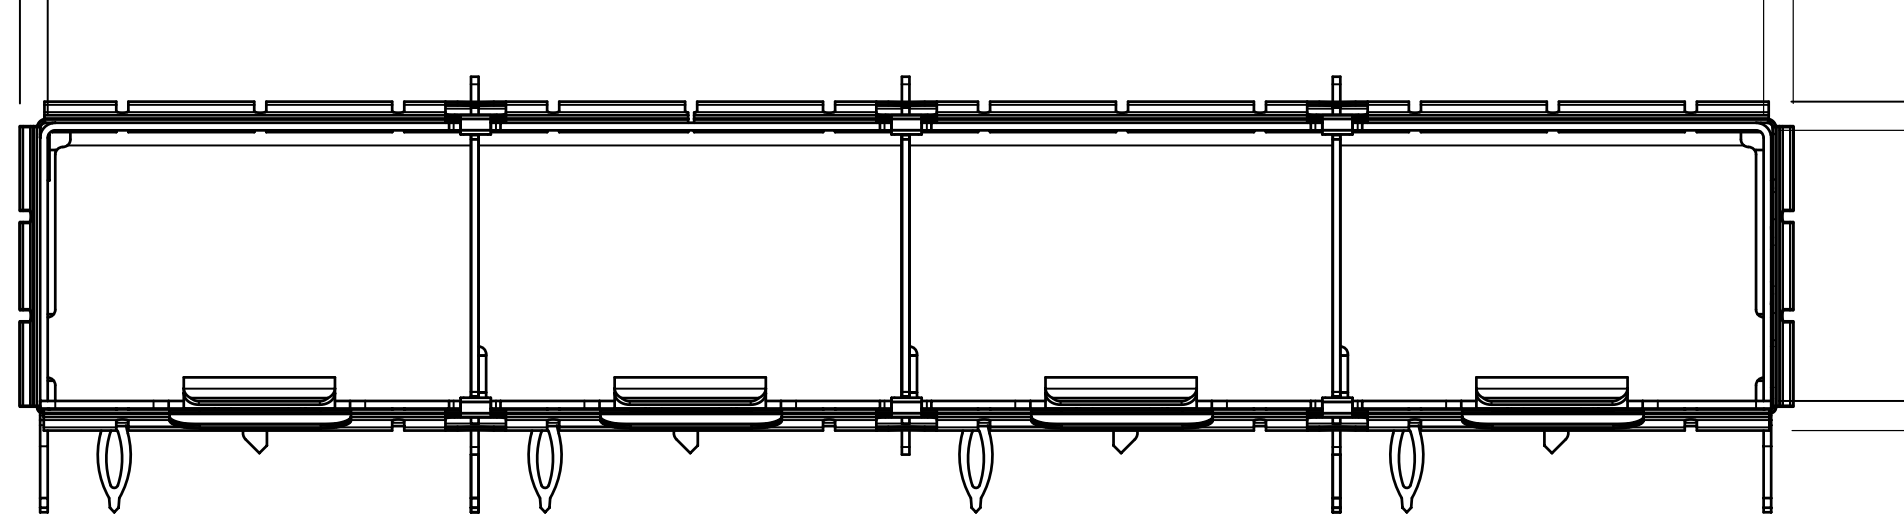

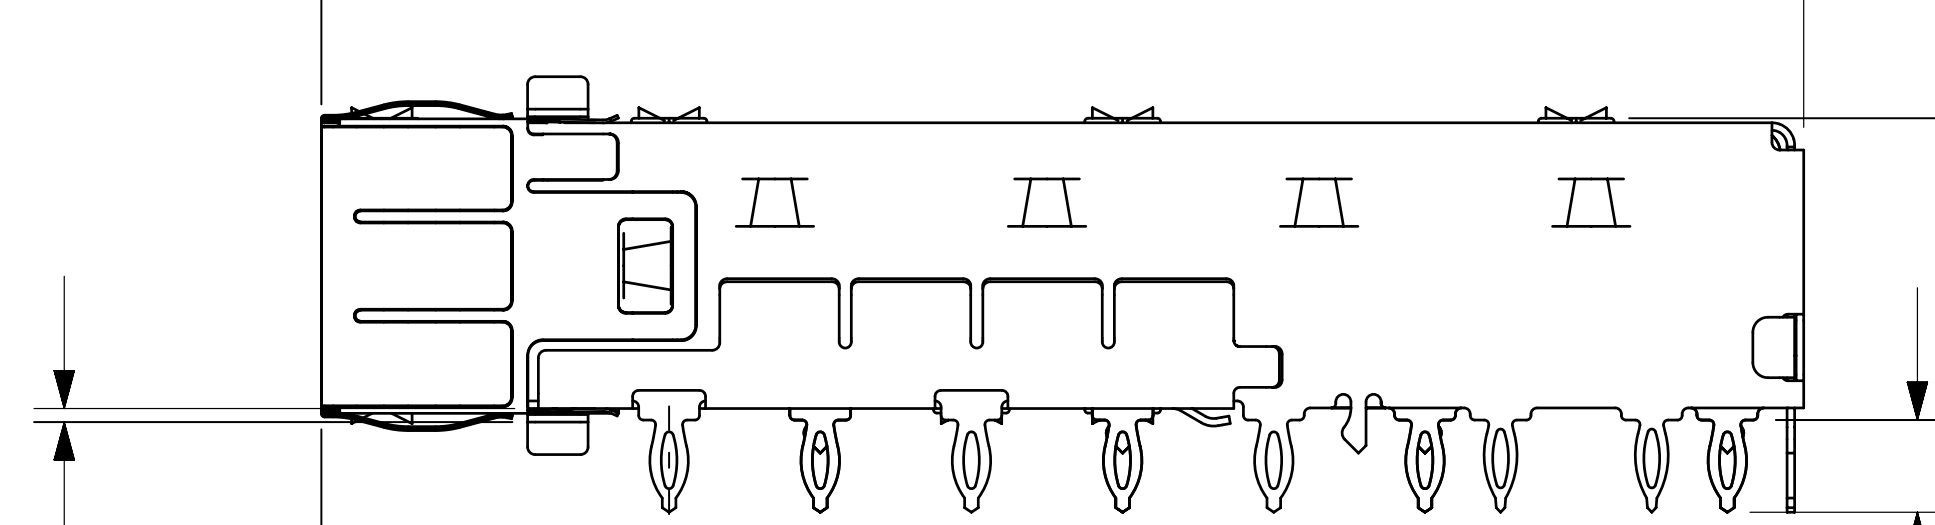

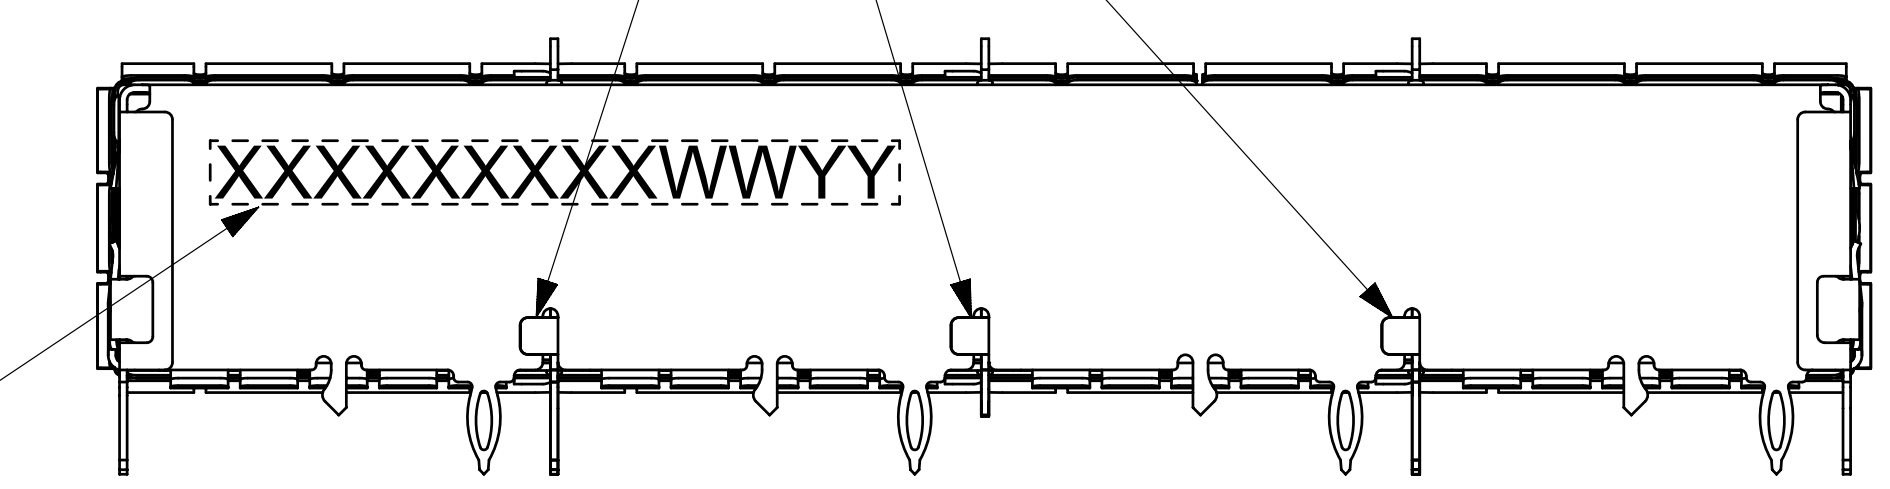

PART NO. AND WEEK/YEAR DATE CODE TO BE PRINTED ON THE BACK OF COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN ON 74754 SERIES CAGE ASSEMBLIES.

	WEEK/YEAR DATE CODE TABLE
WW	01 THRU 52 OR 53 EXAMPLE: 01 = FIRST WEEK OF YEAR 52 = LAST WEEK OF YEAR
YY	19, 20, 21,,, ETC. EXAMPLE: YEAR 2019 = 19

NOTES:

1. MATERIAL:
   CAGE: 0.25mm THICK COPPER ALLOY, NICKEL PLATED.
   SPRING FINGERS: 0.10mm THICK COPPER ALLOY, NICKEL PLATED.
   HEATSINK: ALUMINUM, NICKEL PLATED.
   HEATSINK SPRING CLIP: STAINLESS STEEL.
2. PRESS FIT LEGS 3.05mm LONG:
3. PORTS ARE DESIGNED FOR SFP+ TRANSCEIVERS AND ARE COMPATIBLE WITH SFP TRANSCEIVERS. THE TOP SURFACE OF THE MODULE MUST BE FLAT (NO PRODUCT LABEL RECESS) AND THERMALLY CONDUCTIVE TO FUNCTION OPTIMALLY.
4. WELD SPOT MAY SHOW SLIGHT MATERIAL DISCOLORATION.
5. NO RoHS EXEMPTIONS.
6. CUSTOM HEATSINKS AVAILABLE UPON REQUEST.

SYMBOLS		
DIMENSION UNITS	mm	SCALE 2:1
GENERAL TOLERANCES (UNLESS SPECIFIED)		
ANGULAR TOL	±	1.0 °
4 PLACES	±	
3 PLACES	±	
2 PLACES	±	0.15
1 PLACE	±	0.25
0 PLACES	±	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

CURRENT REV DESC: SEE REVISION TABLE

EC NO: 610317
DRWN: SMALLESHAPPA 2019/01/09
CHK'D: VK10 2019/01/11
APPR: RCHEN08 2019/01/15
INITIAL REVISION:
DRWN: VK10 2016/06/02
APPR: RCHEN08 2016/08/04

THIRD ANGLE PROJECTION | DRAWING C-SIZE | SERIES 111112

molex

SFP+ 1X4 SF CAGE 3.05 MM
PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1111122420	PSD	ASY	M

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE SHEET 3		1 OF 8

DOCUMENT STATUS	P1	RELEASE DATE	2019/01/15 04:22:10

CAGE ASSEMBLY OPTIONS

OPEN TOP
1111120420
SHOWN
(APPLIES TO ALL OPEN TOP CAGES)

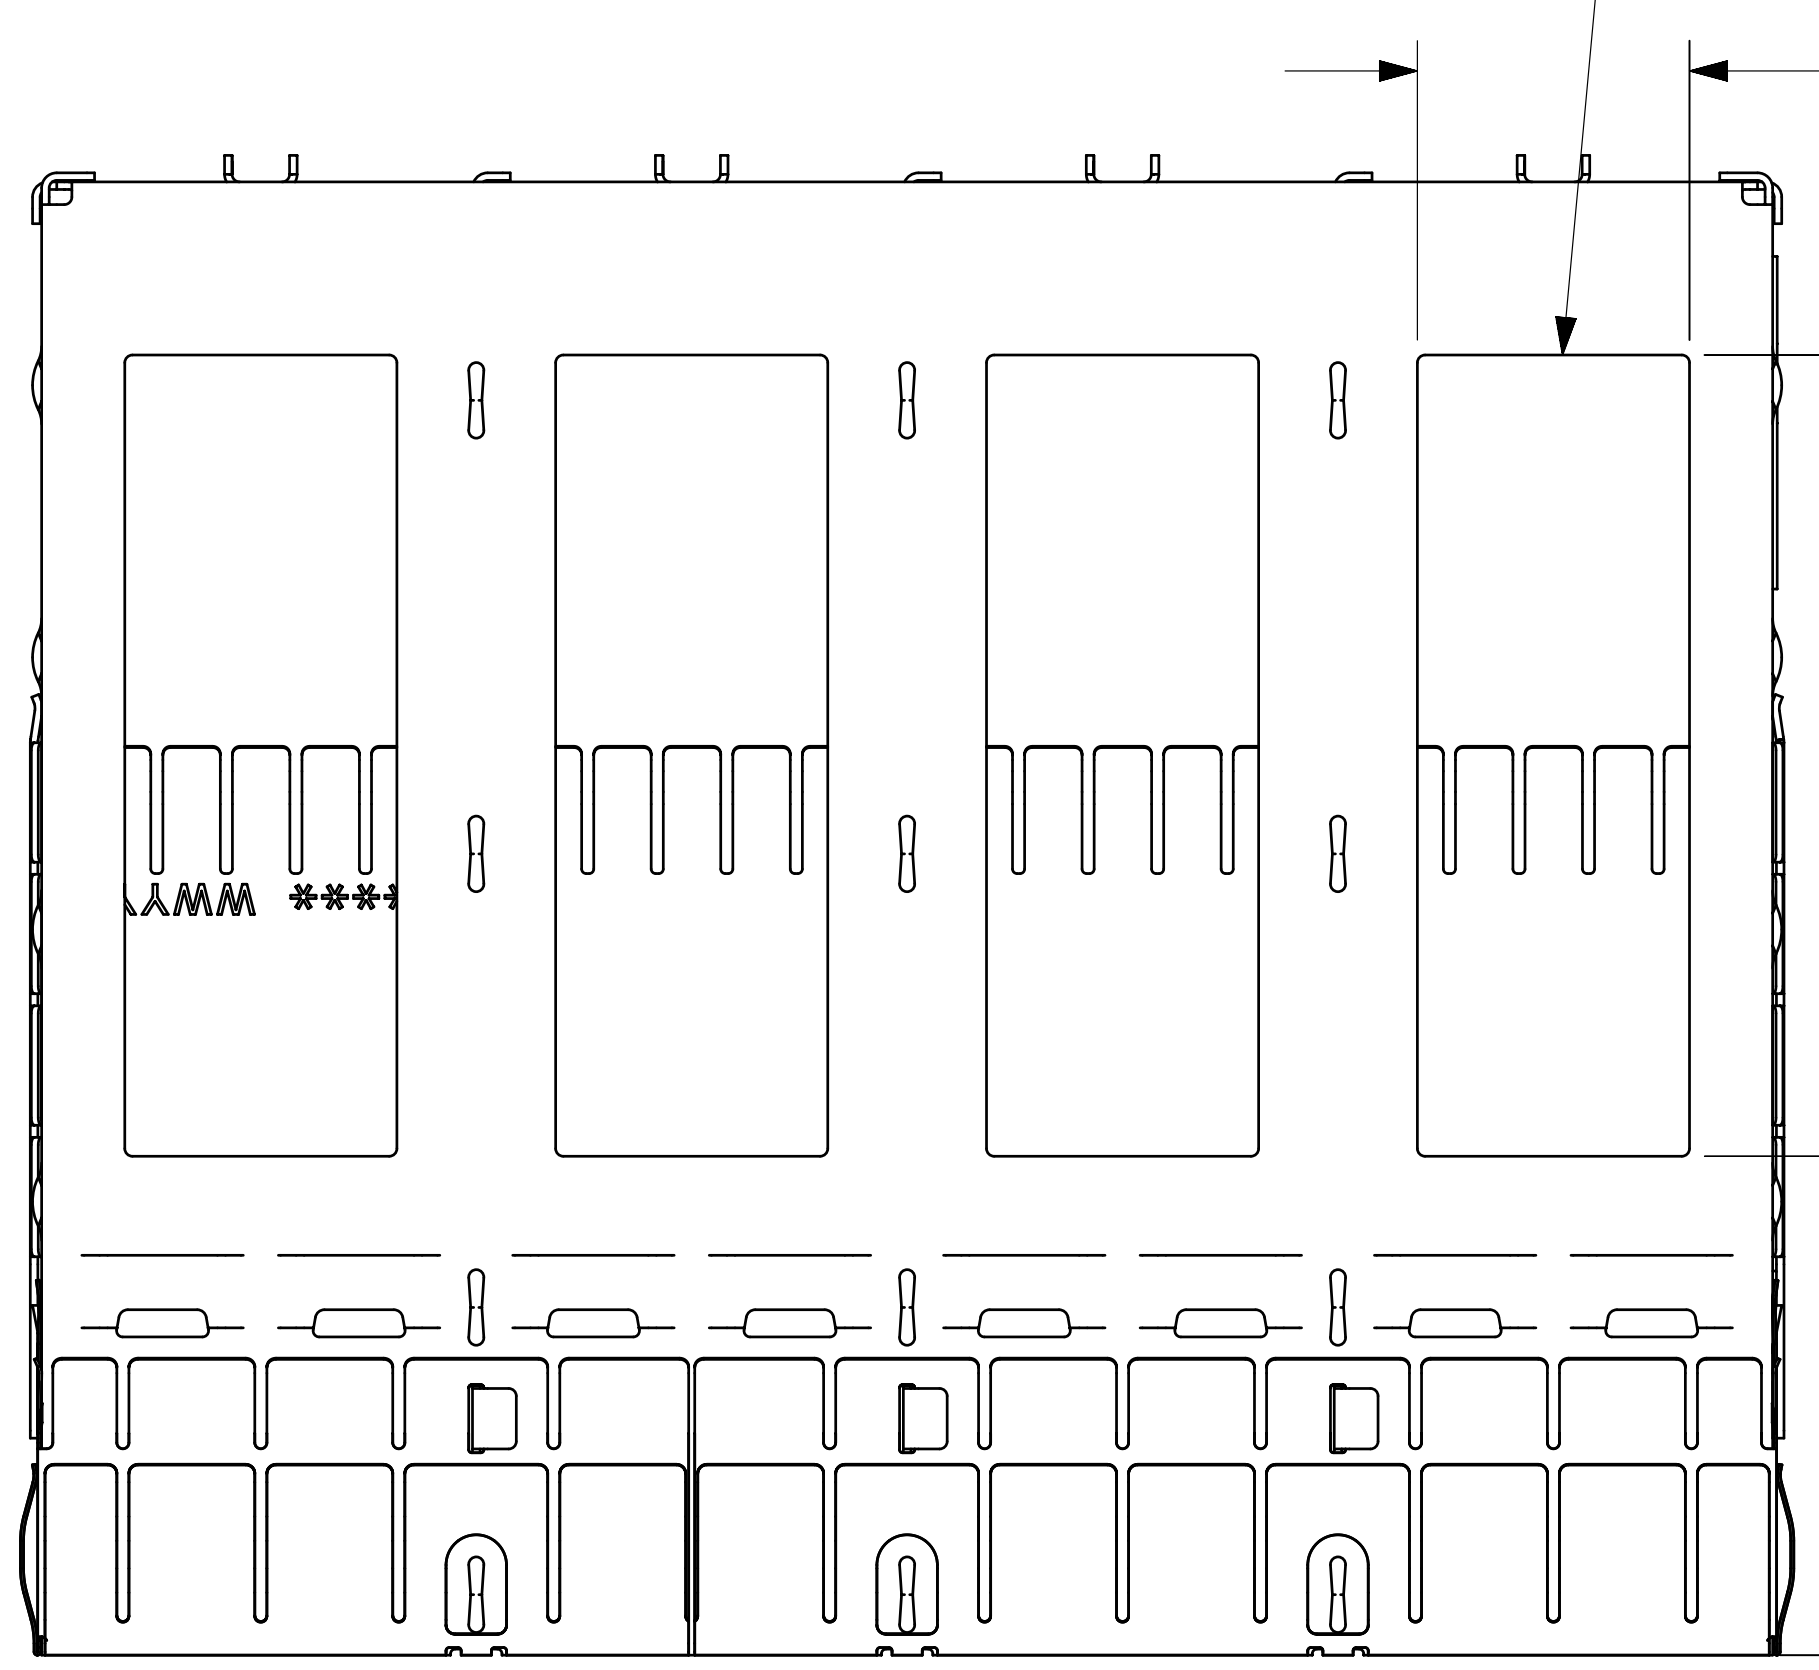

HEATSINK OPTIONS
CUSTOM FIN

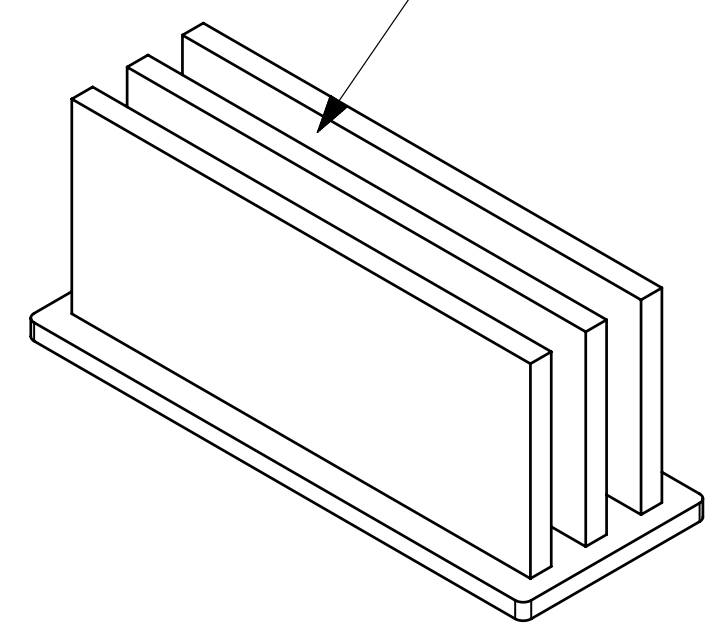

OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
CUSTOM	23.6

HEATSINK OPTIONS

PIN FIELD NETWORKING
PIN FIELD SAN
PIN FIELD PCI

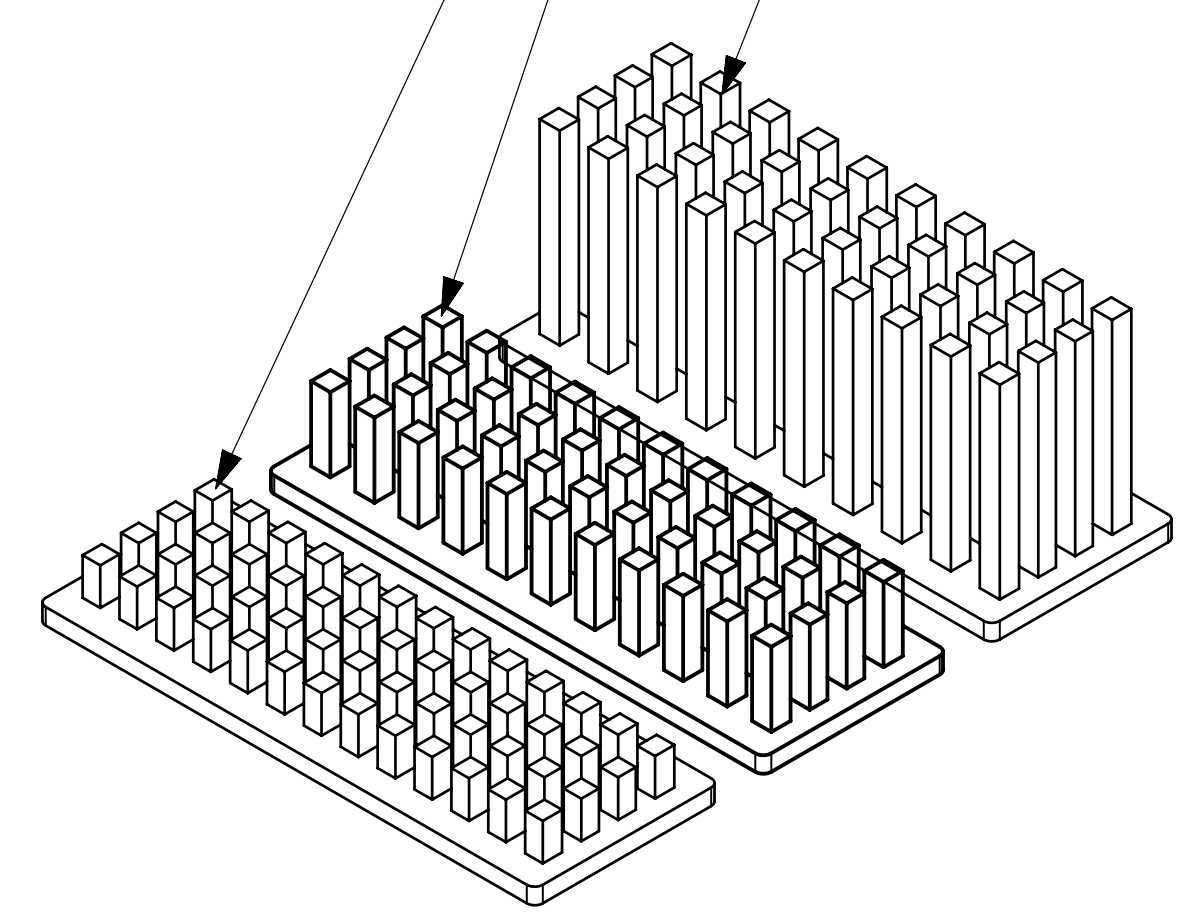

OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
PCI	14.3
SAN	16.6
NETWORKING	23.6

NOTE: PCI-13ROWS
SAN-11ROWS
NETWORKING-10ROWS

HEATSINK OPTIONS

LATERAL FIN NETWORKING
LATERAL FIN SAN
LATERAL FIN PCI

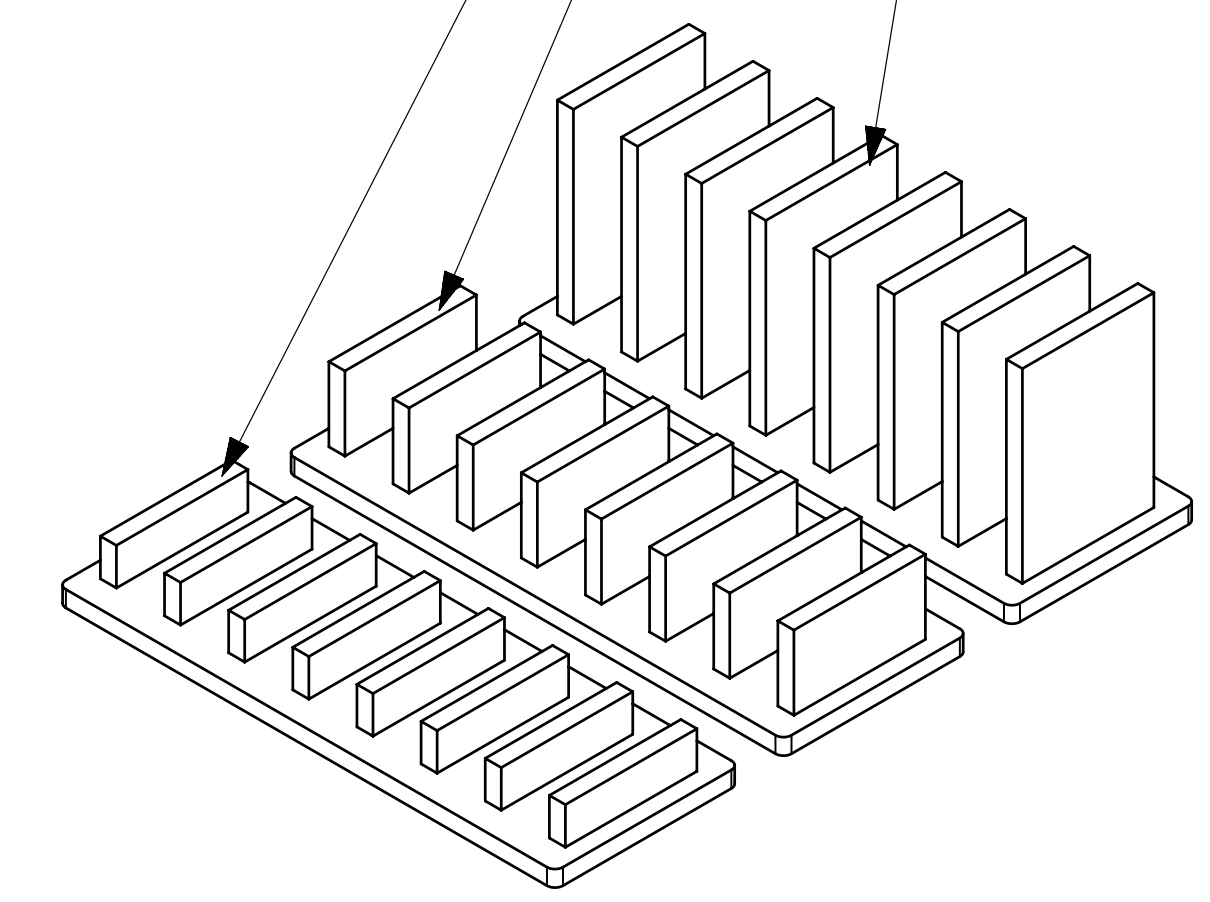

OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
PCI	14.3
SAN	16.6
NETWORK I NG	23.6

HEATSINK OPTIONS

WIDE GAP PIN FIELD NETWORKING
WIDE GAP PIN FIELD SAN
WIDE GAP PIN FIELD PCI

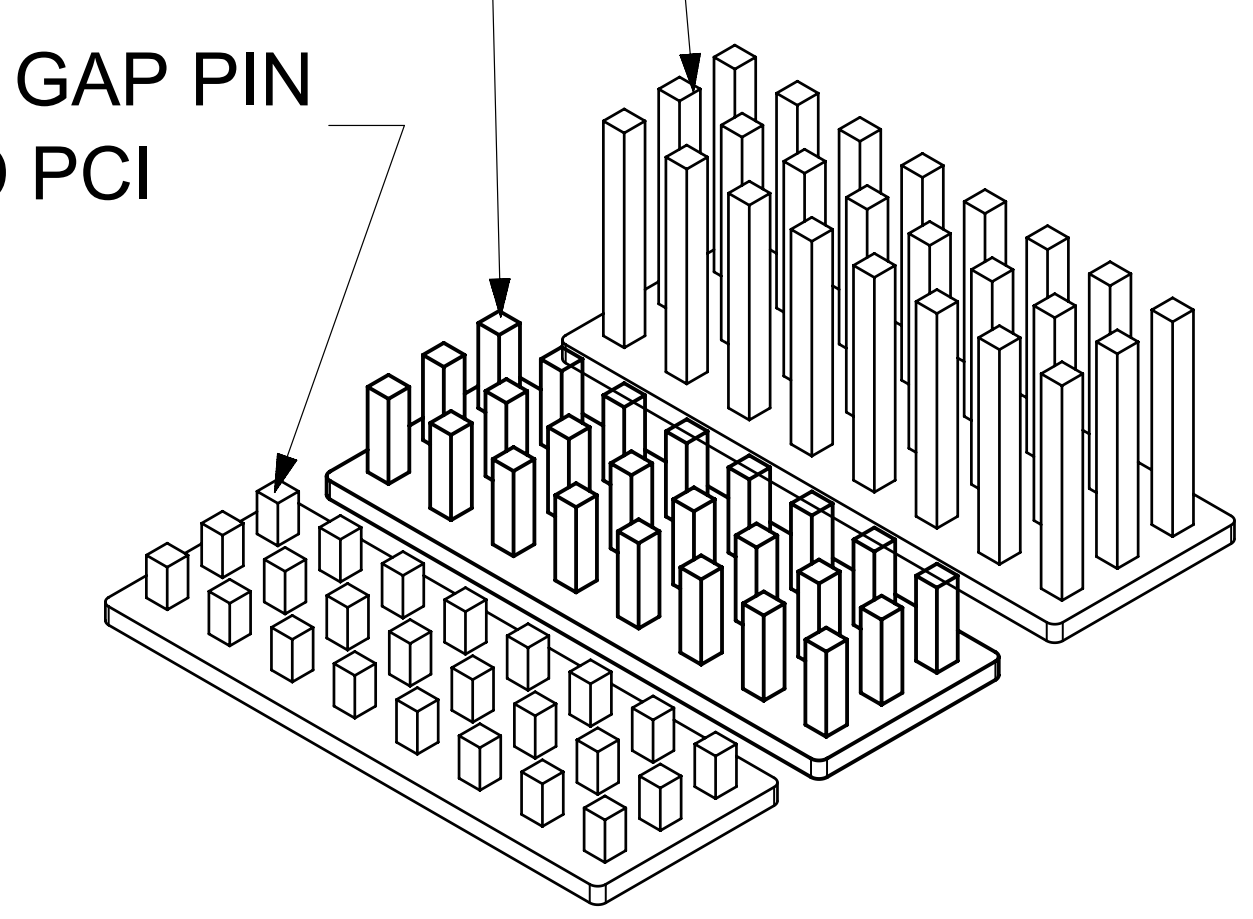

OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
PCI	14.3
SAN	16.6
NETWORK I NG	23.6

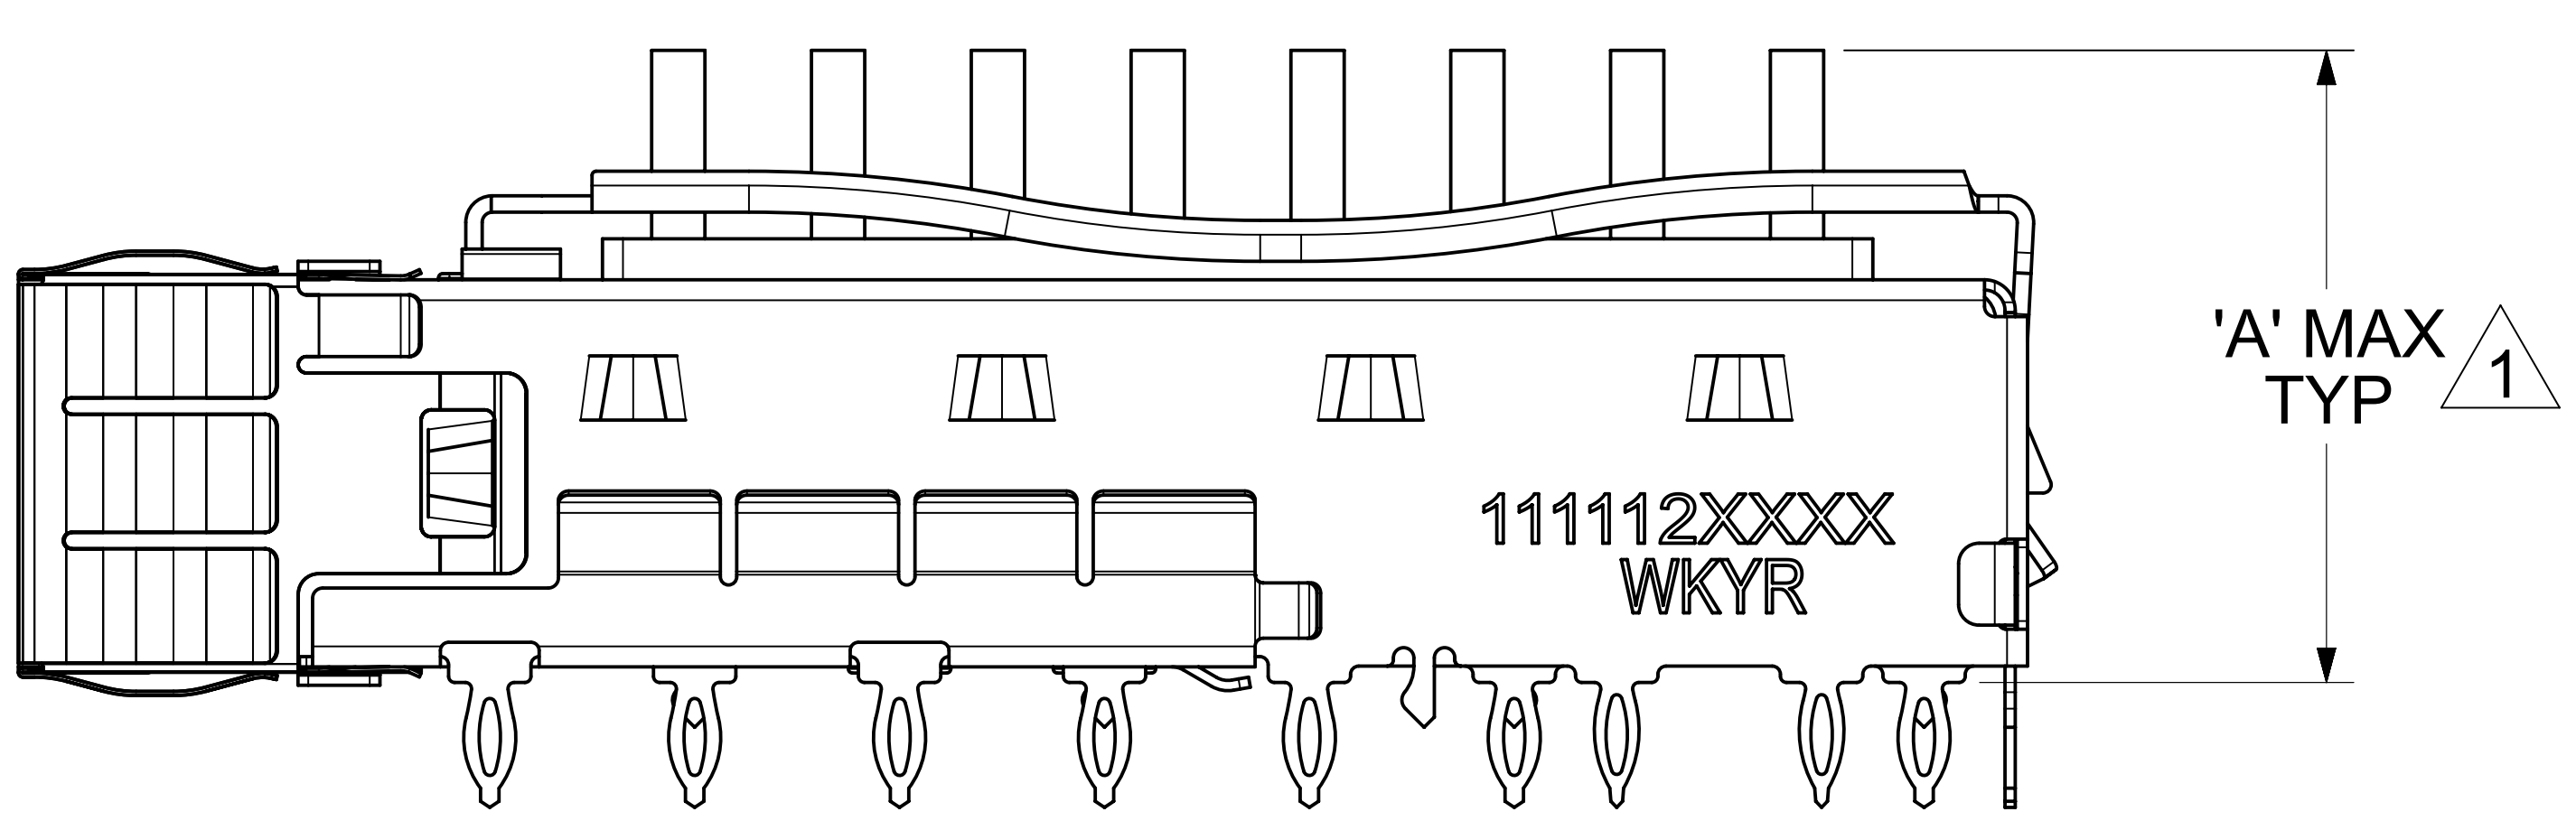

OPTIONAL POLYIMIDE INSULATOR ATTACHED TO BOTTOM OF CAGE MATERIAL NUMBER 739310633 REFERENCE

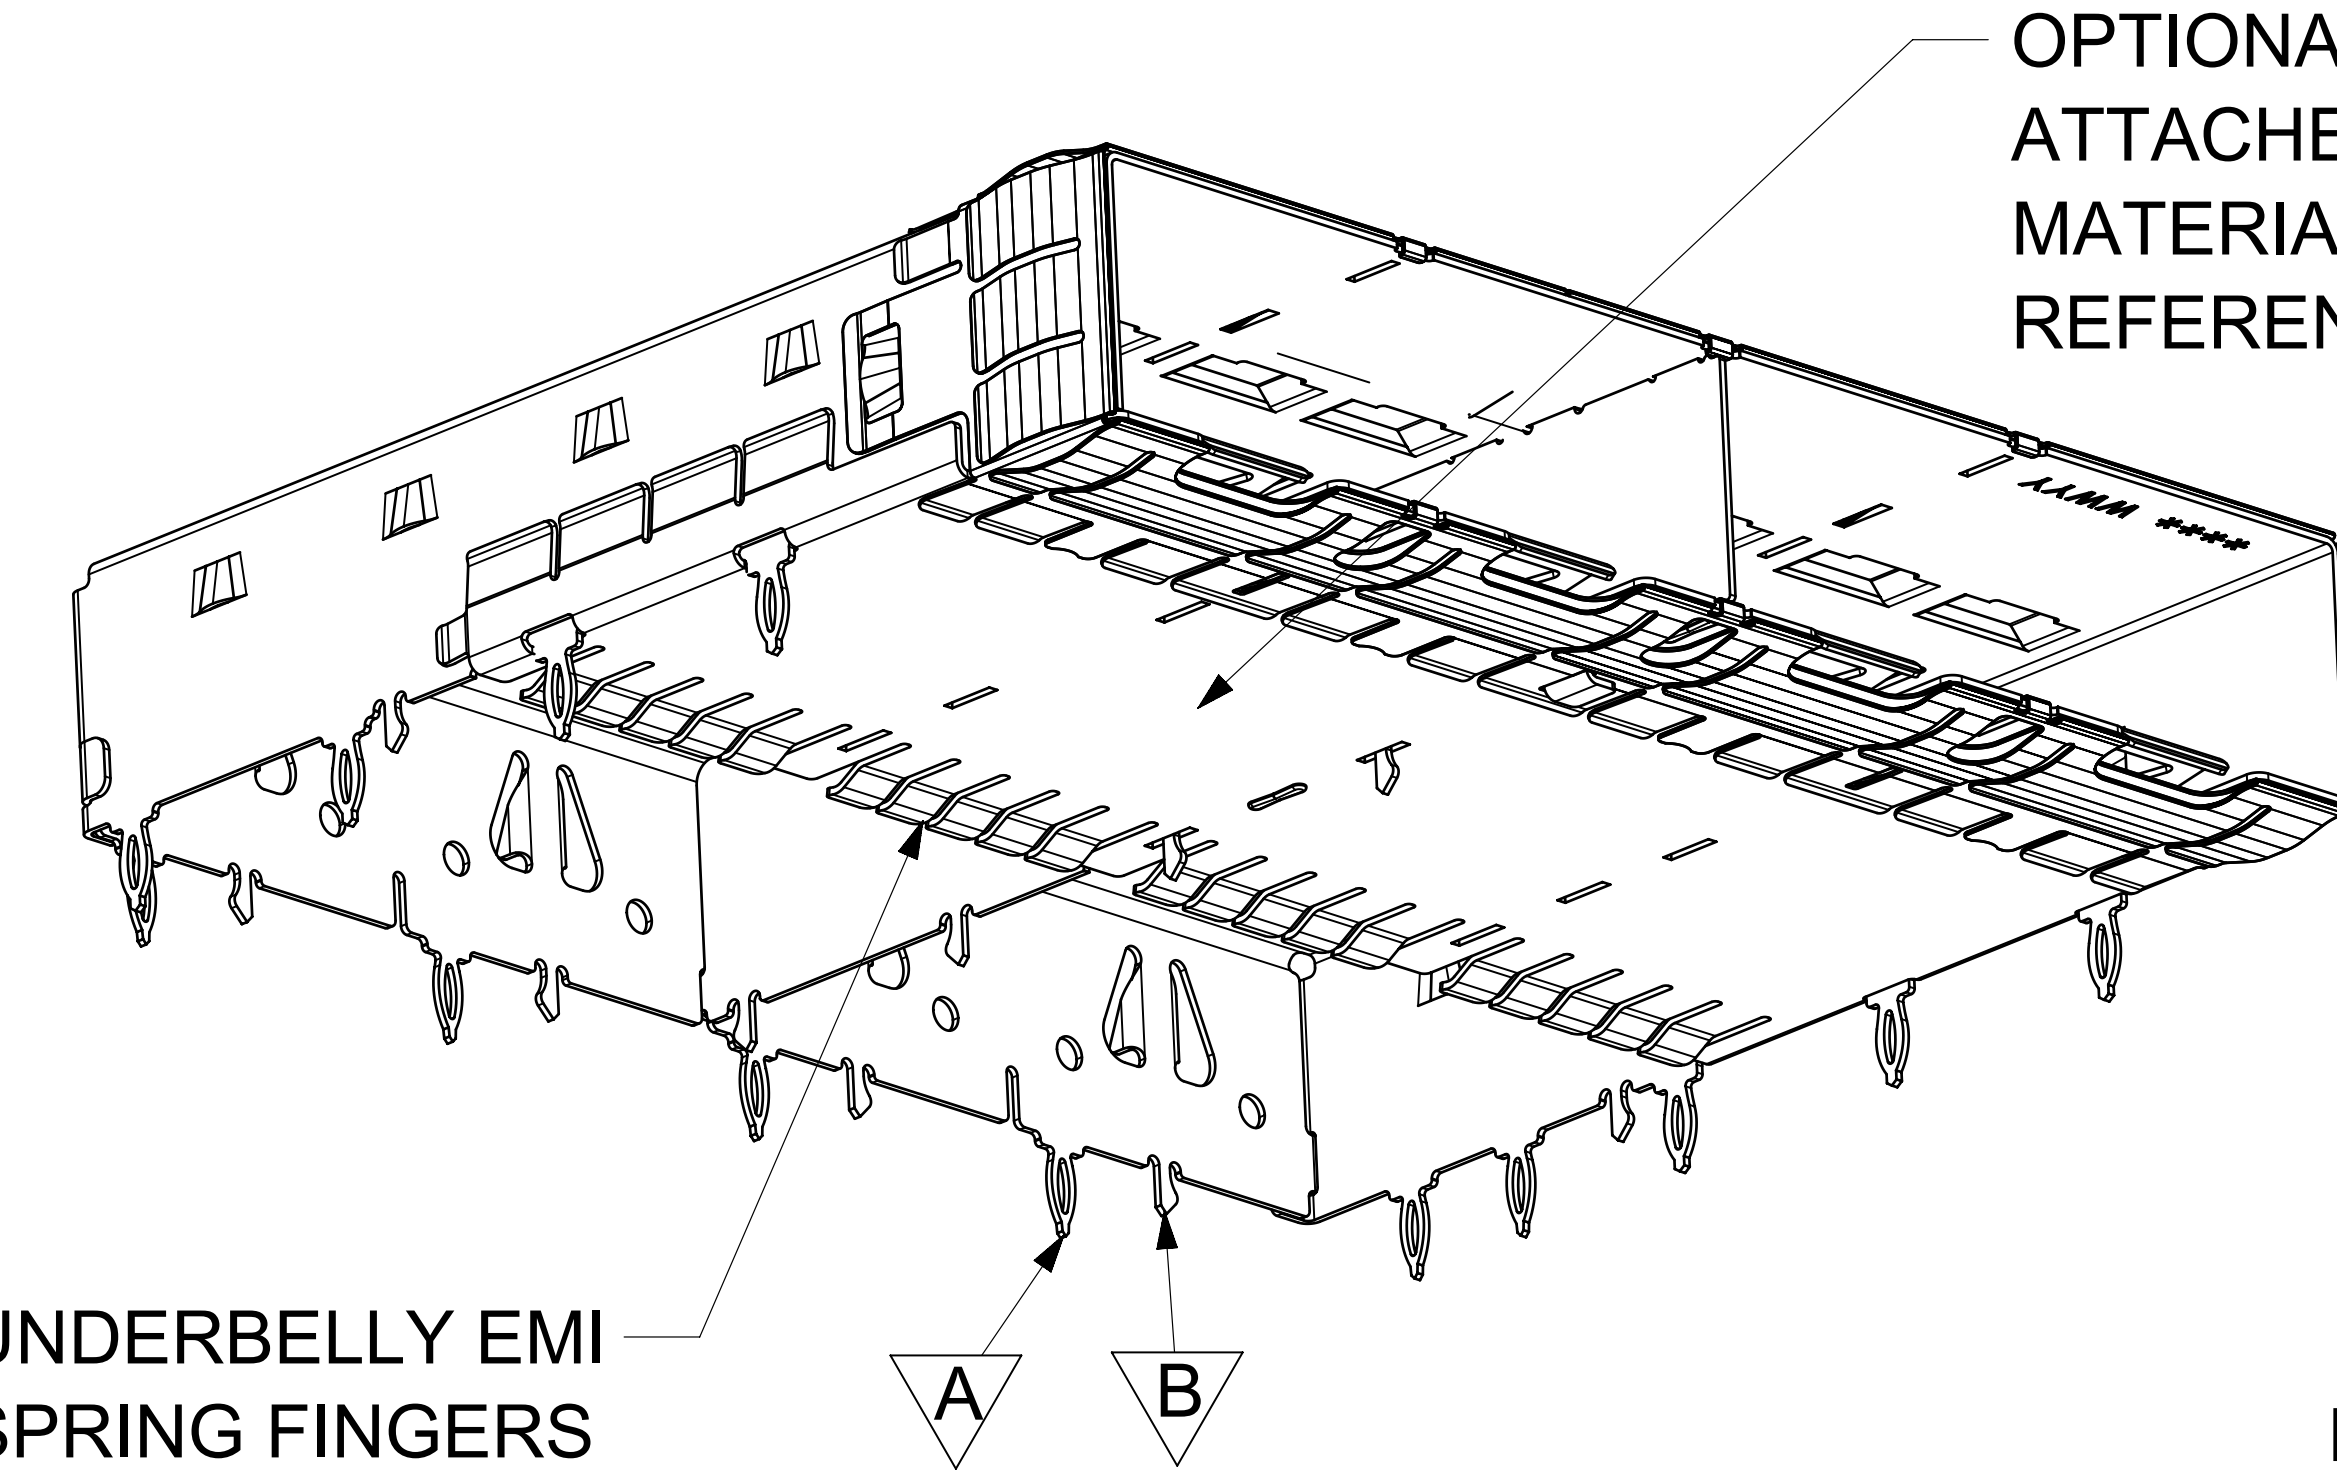

UNDERBELLY EMI SPRING FINGERS

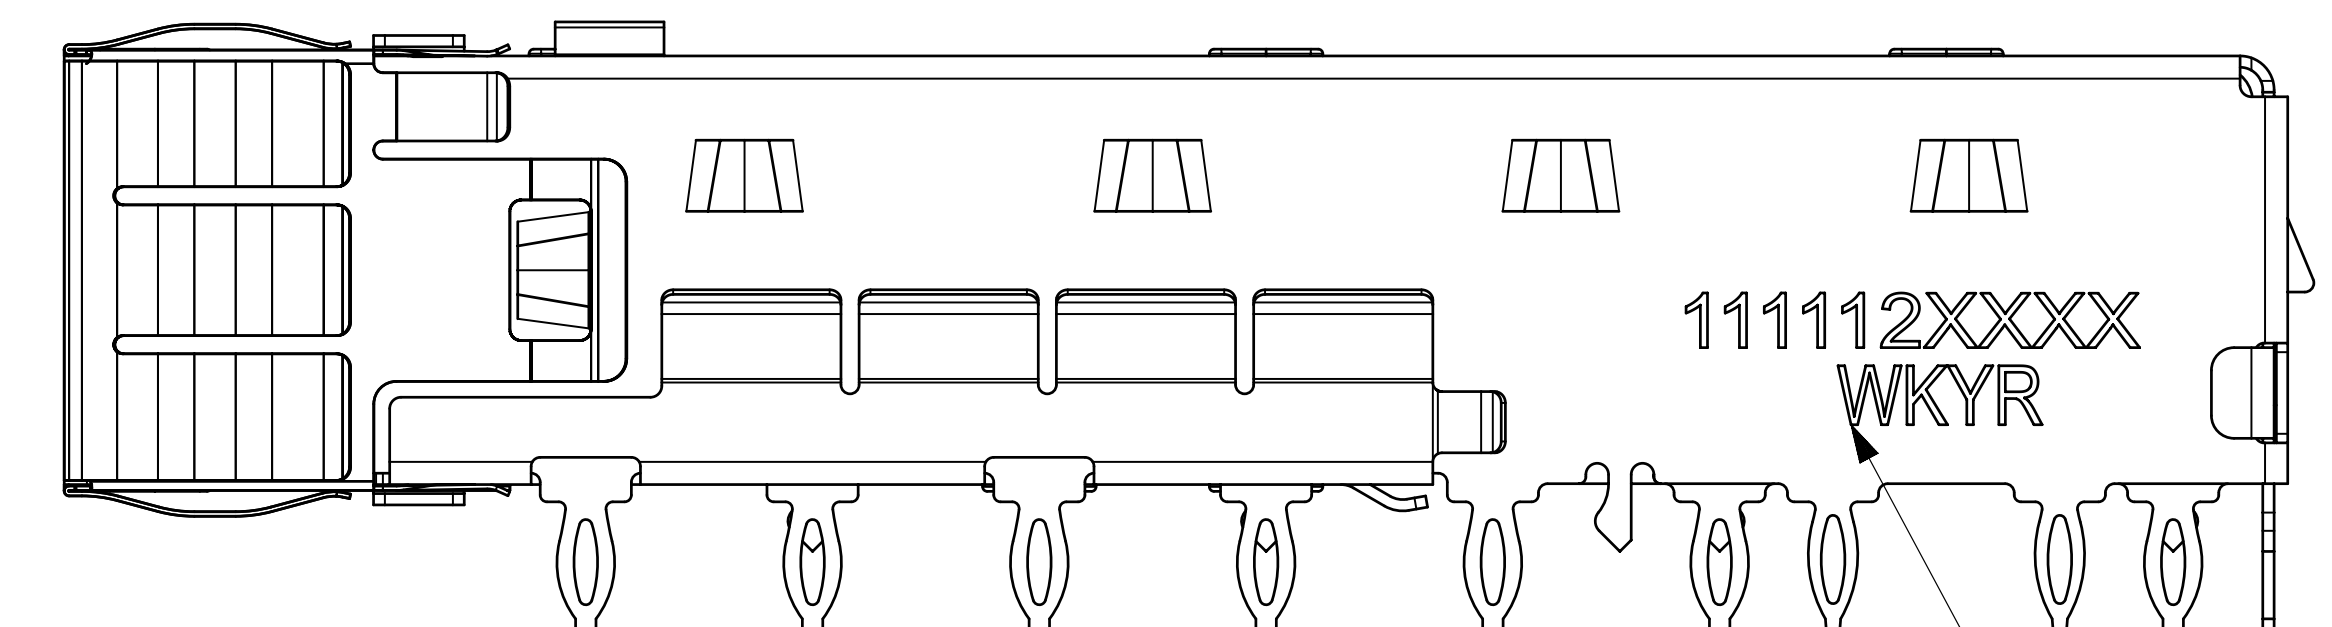

NOTES:
1. HEIGHT OF HEATSINK WITH MODULE INSERTED. DIMENSION MAY BE LESS DUE TO MODULE AND HEATSINK VARIATIONS.

PART NO. AND WEEK/YEAR DATE CODE TO BE PRINTED ON THE SIDE OF COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN FOR 111112 SERIES CAGE ASSEMBLIES.

WEEK/YEAR DATE CODE TABLE	
WW	01 THRU 52 OR 53 EXAMPLE: 01 = FIRST WEEK OF YEAR 52 = LAST WEEK OF YEAR
YY	19, 20, 21,, ETC. EXAMPLE: YEAR 2019 = 19

REAR LEG OPTIONS

(PER PORT)

1A | 1A, 1B | 3A

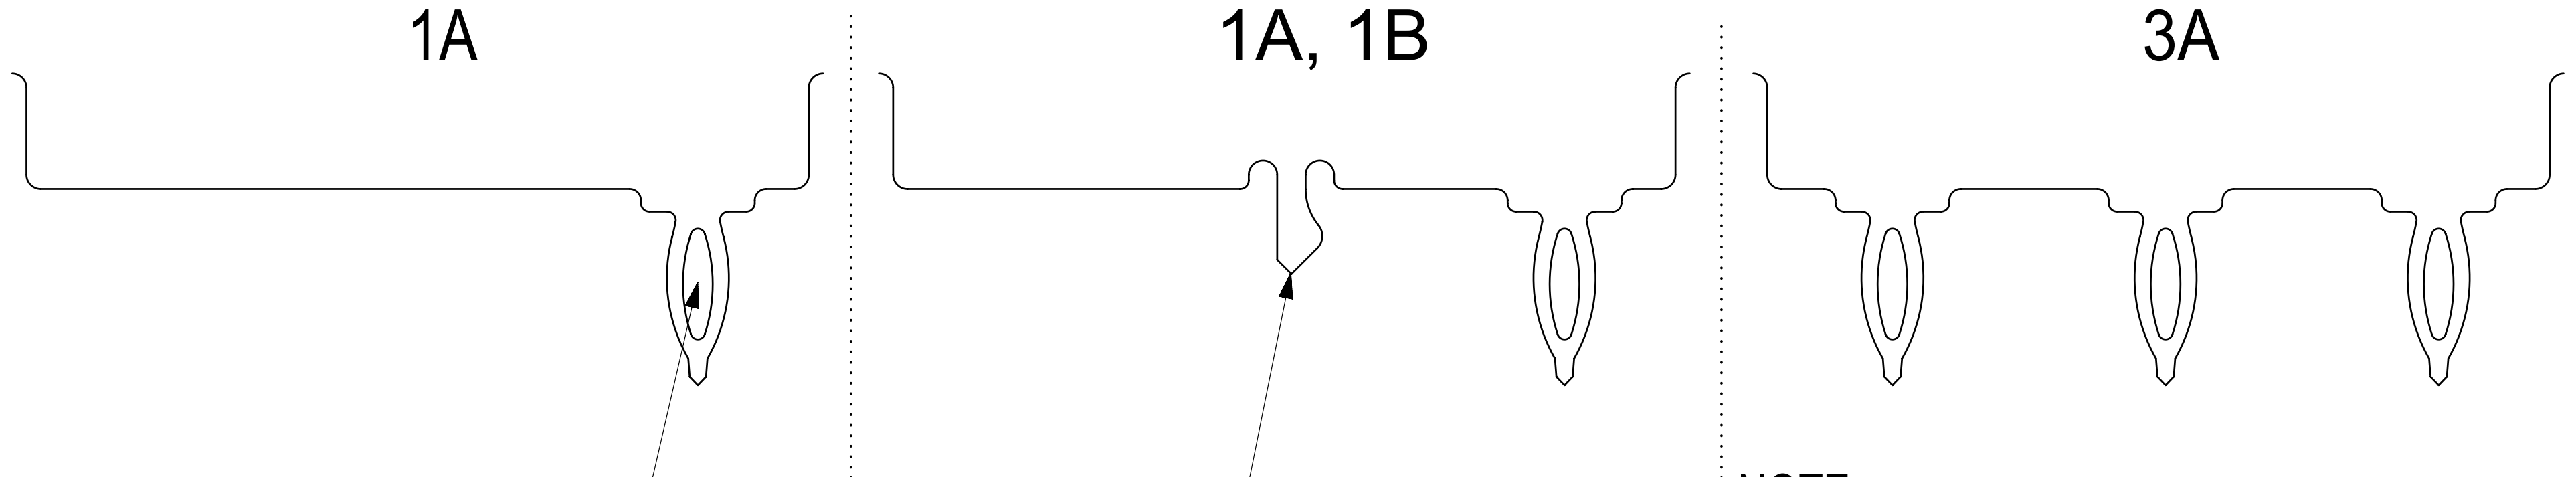

A :PRESS FIT
B :P-PIN

NOTE:
3A IS FOR SINGLE SIDED APPLICATION ONLY

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

SYMBOLS		
DIMENSION UNITS: mm	SCALE: 2:1	
GENERAL TOLERANCES (UNLESS SPECIFIED)		
ANGULAR TOL	±	1.0 °
4 PLACES	±	
3 PLACES	±	
2 PLACES	±	0.15
1 PLACE	±	0.25
0 PLACES	±	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

= 0 (symbols, 10 rows)

CURRENT REV DESC: SEE REVISION TABLE

EC NO:	610317	
DRWN:	SMALLESHAPPA	2019/01/09
CHK'D:	VK10	2019/01/11
APPR:	RCHEN08	2019/01/15
INITIAL REVISION:		
DRWN:	VK10	2016/06/02
APPR:	RCHEN08	2016/08/04

molex

SFP+ 1X4 SF CAGE 3.05 MM
PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1111122420	PSD	ASY	M

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	C-SIZE	111112	SEE SHEET 3		2 OF 8

DOCUMENT STATUS	P1	RELEASE DATE	2019/01/15 04:22:10

FORMAT: master-tb-prod-C
REVISION: H
DATE: 2018/01/18

PART NUMBER SELECTION

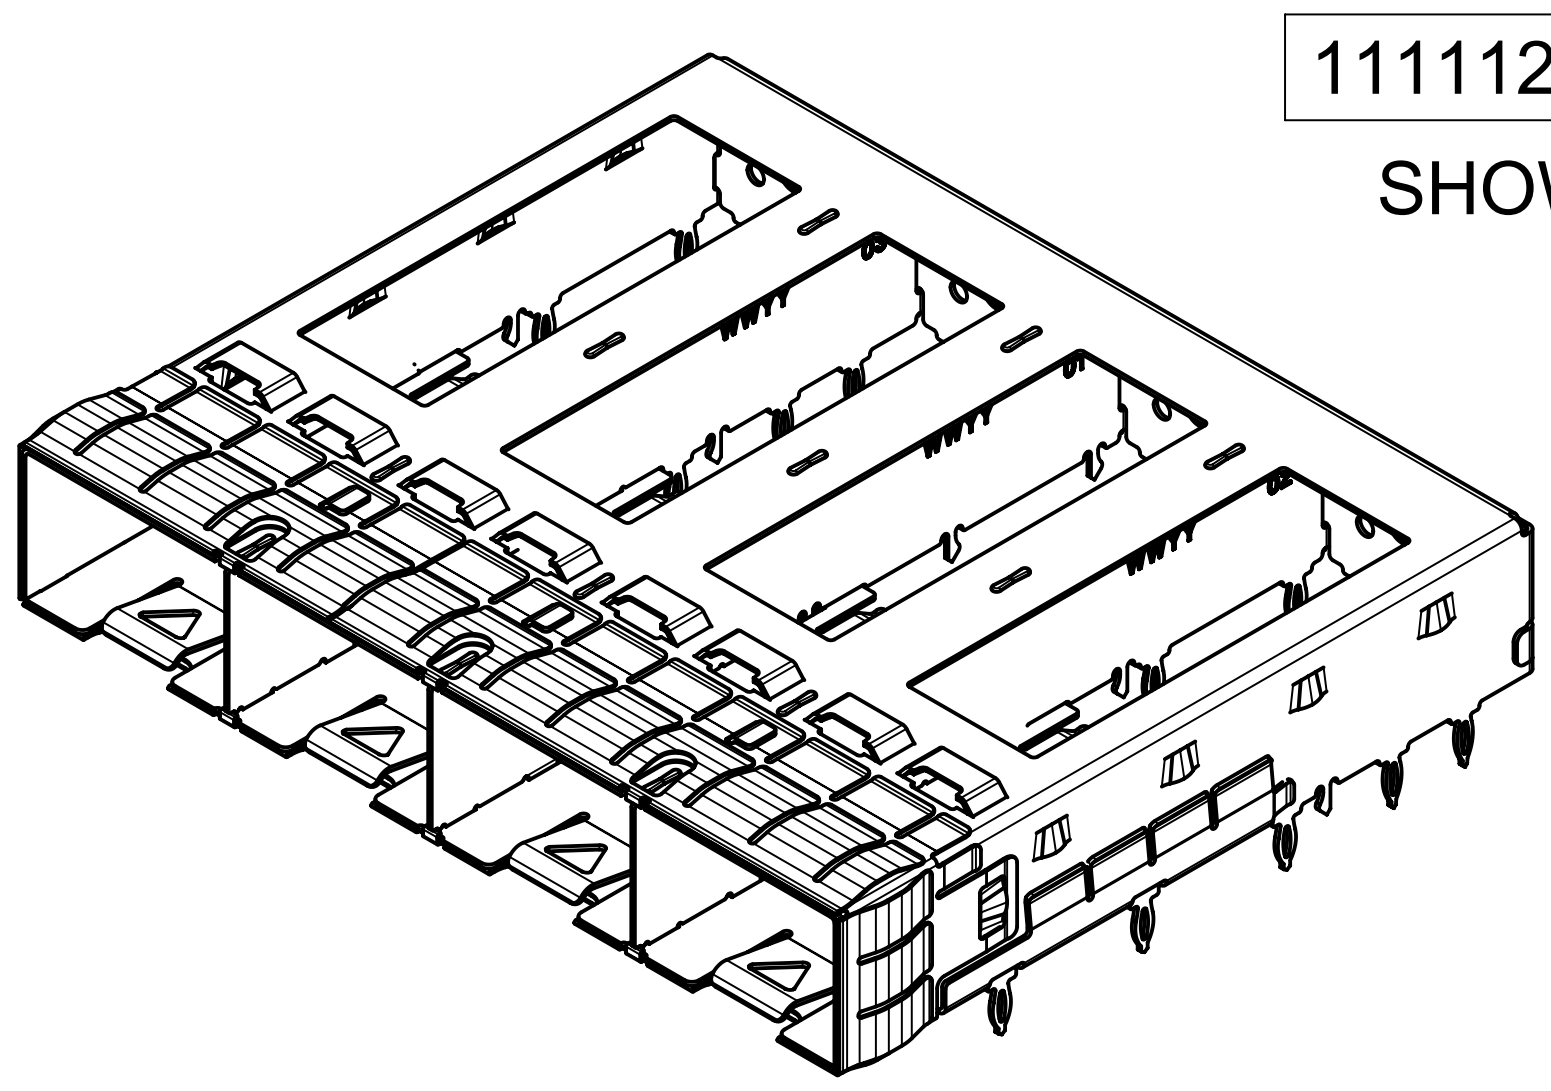

1111120420
SHOWN

SFP+ OPEN TOP BASE CAGE FOR HEATSINK		
PART NO.	POLYIMIDE INSULATOR	# OF REAR LEGS PER PORT
1111120420	---	1A, 1B
1111120460	YES	1A, 1B
1111120494	---	1A, 1B

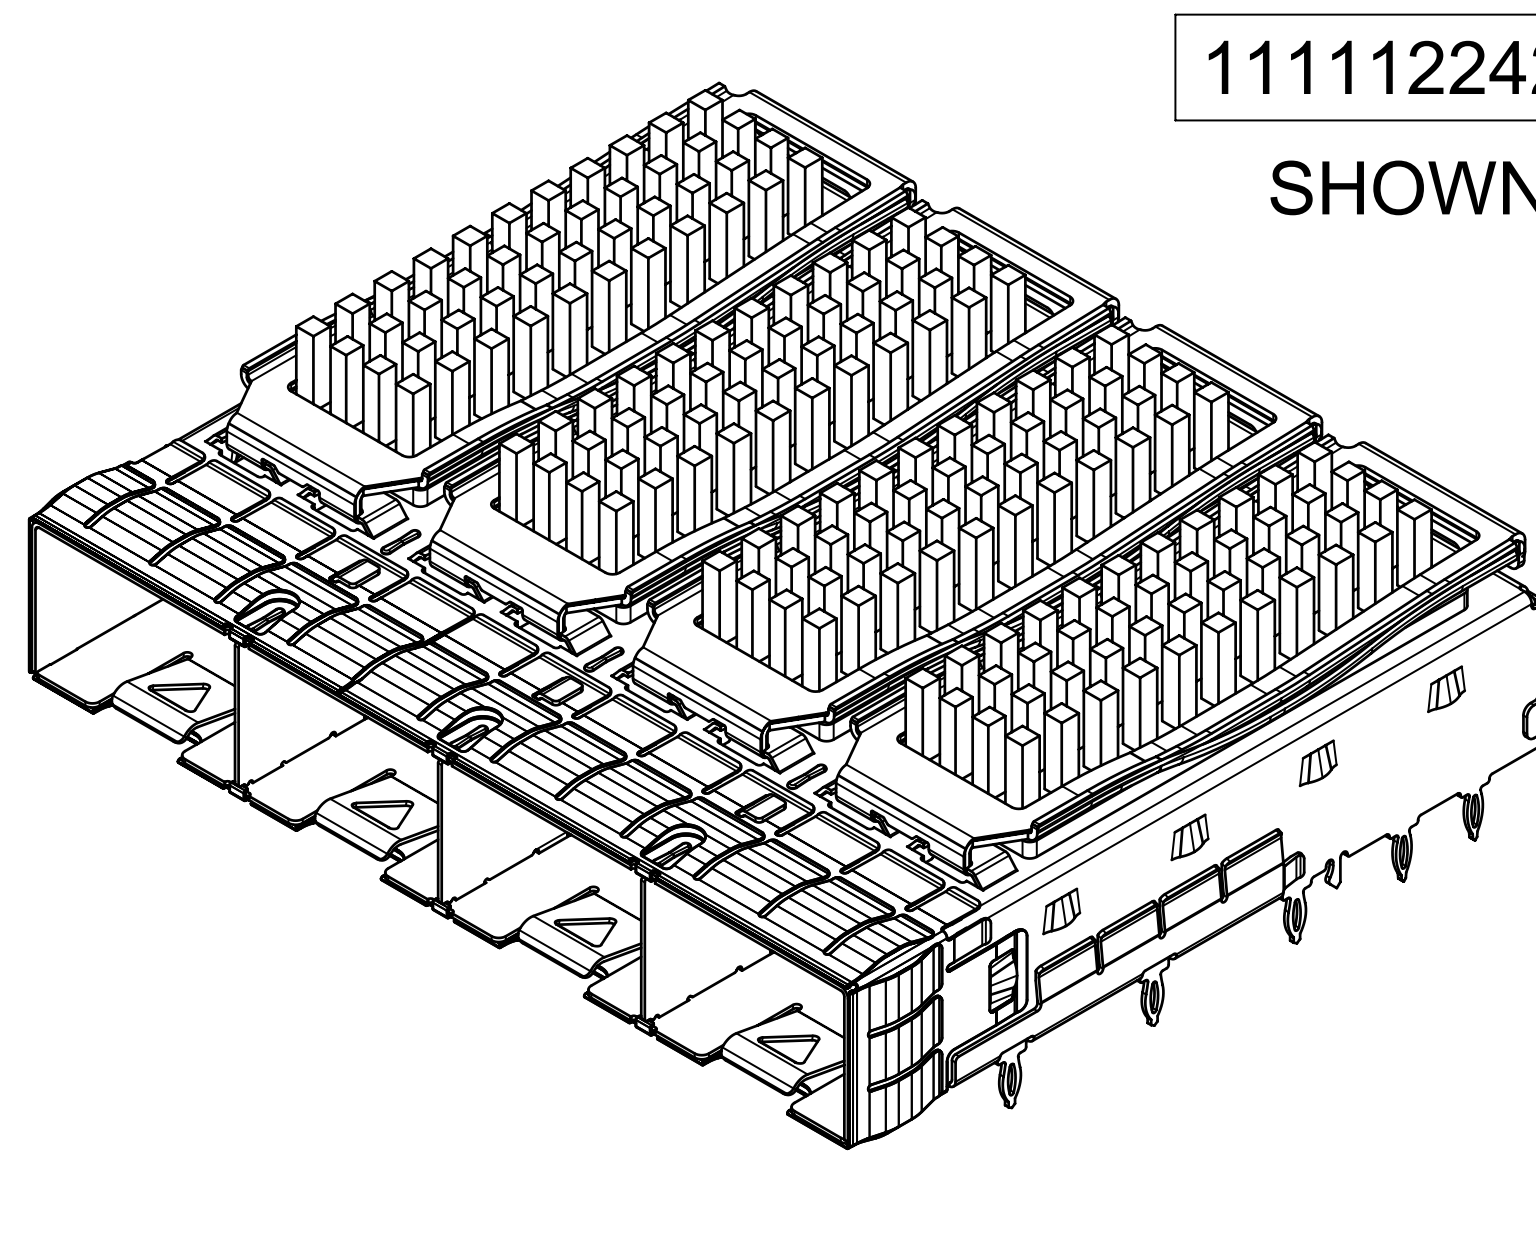

1111122420
SHOWN

SFP+ PIN FIELD HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEAT SINK	# OF REAR LEGS PER PORT
1111121420	---	PCI	1A, 1B
1111121460	YES	PCI	1A, 1B
1111122420	---	SAN	1A, 1B
1111122460	YES	SAN	1A, 1B
1111123420	---	NET	1A, 1B
1111123460	YES	NET	1A, 1B

NOTE: PCI-13ROWS
SAN-11ROWS
NET-10ROWS

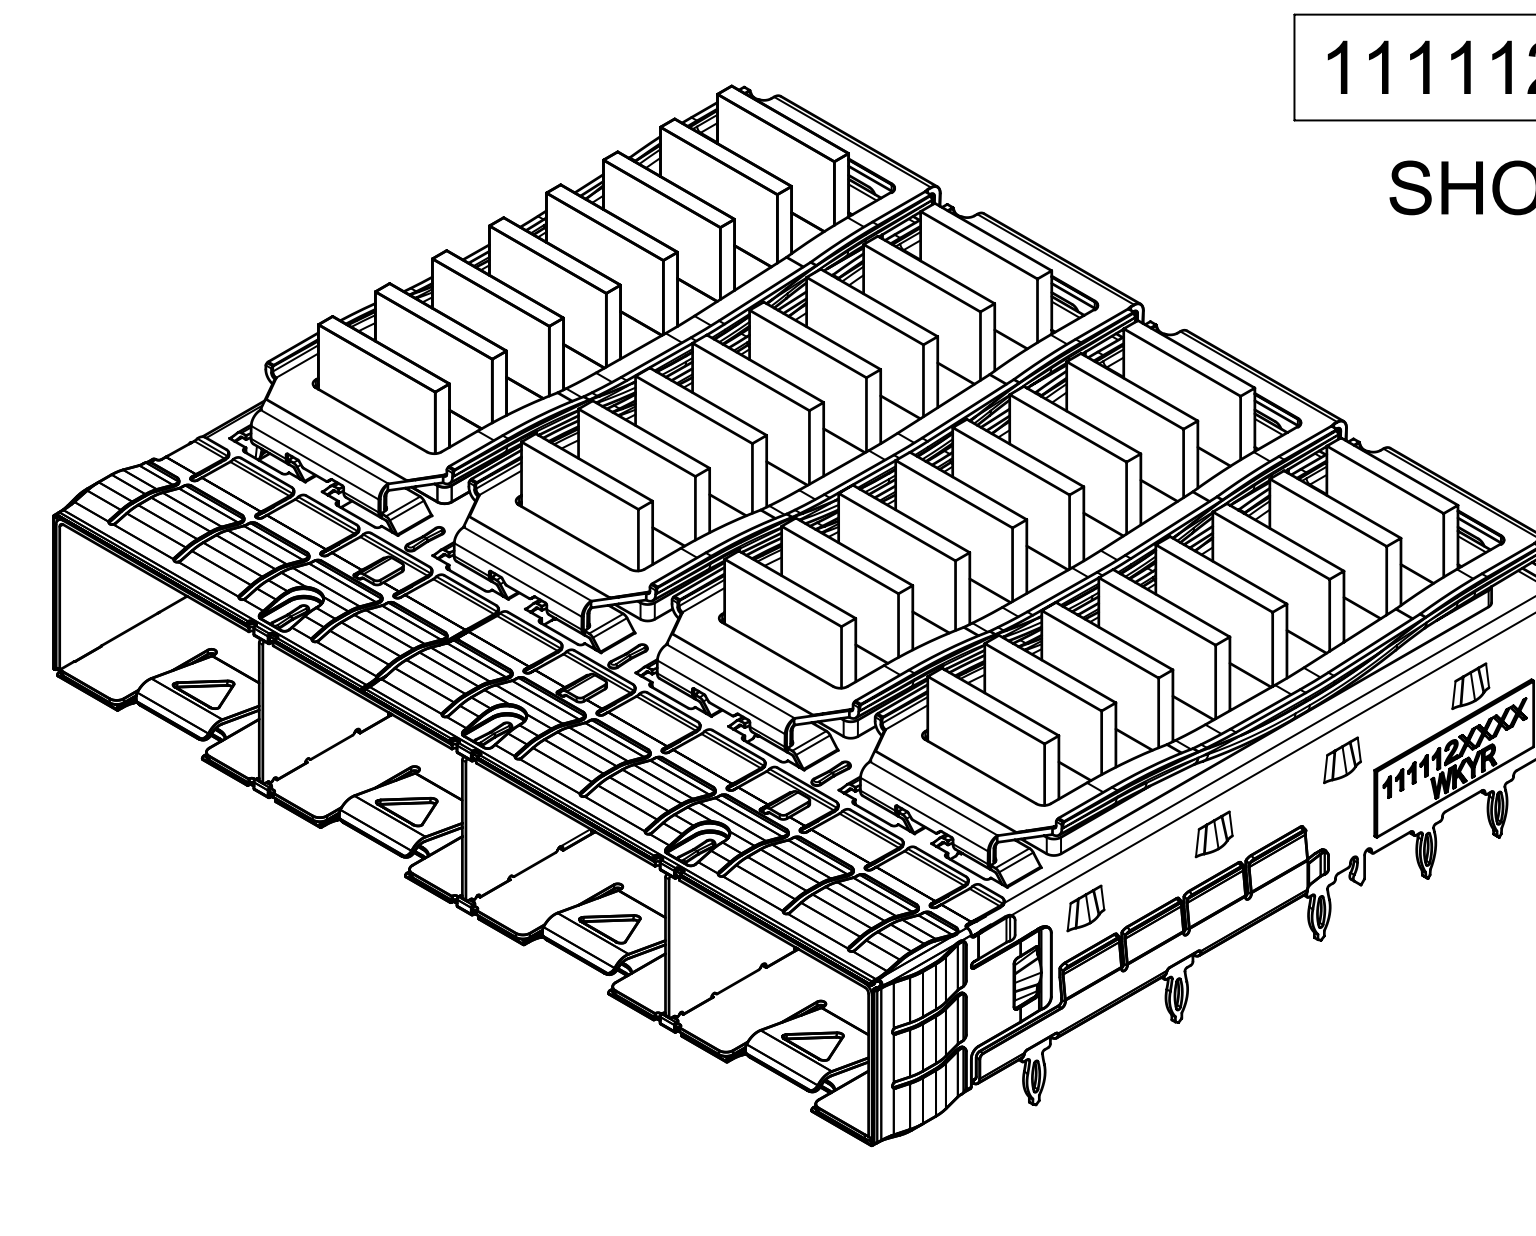

1111125420
SHOWN

SFP+ LATERAL FIN HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEAT SINK	# OF REAR LEGS PER PORT
1111124420	---	PCI	1A, 1B
1111124460	YES	PCI	1A, 1B
1111125420	---	SAN	1A, 1B
1111125421	---	SAN(*)	1A, 1B
1111125460	YES	SAN	1A, 1B
1111126420	---	NET	1A, 1B
1111126460	YES	NET	1A, 1B

NOTE: (*)FAR LOW CAST

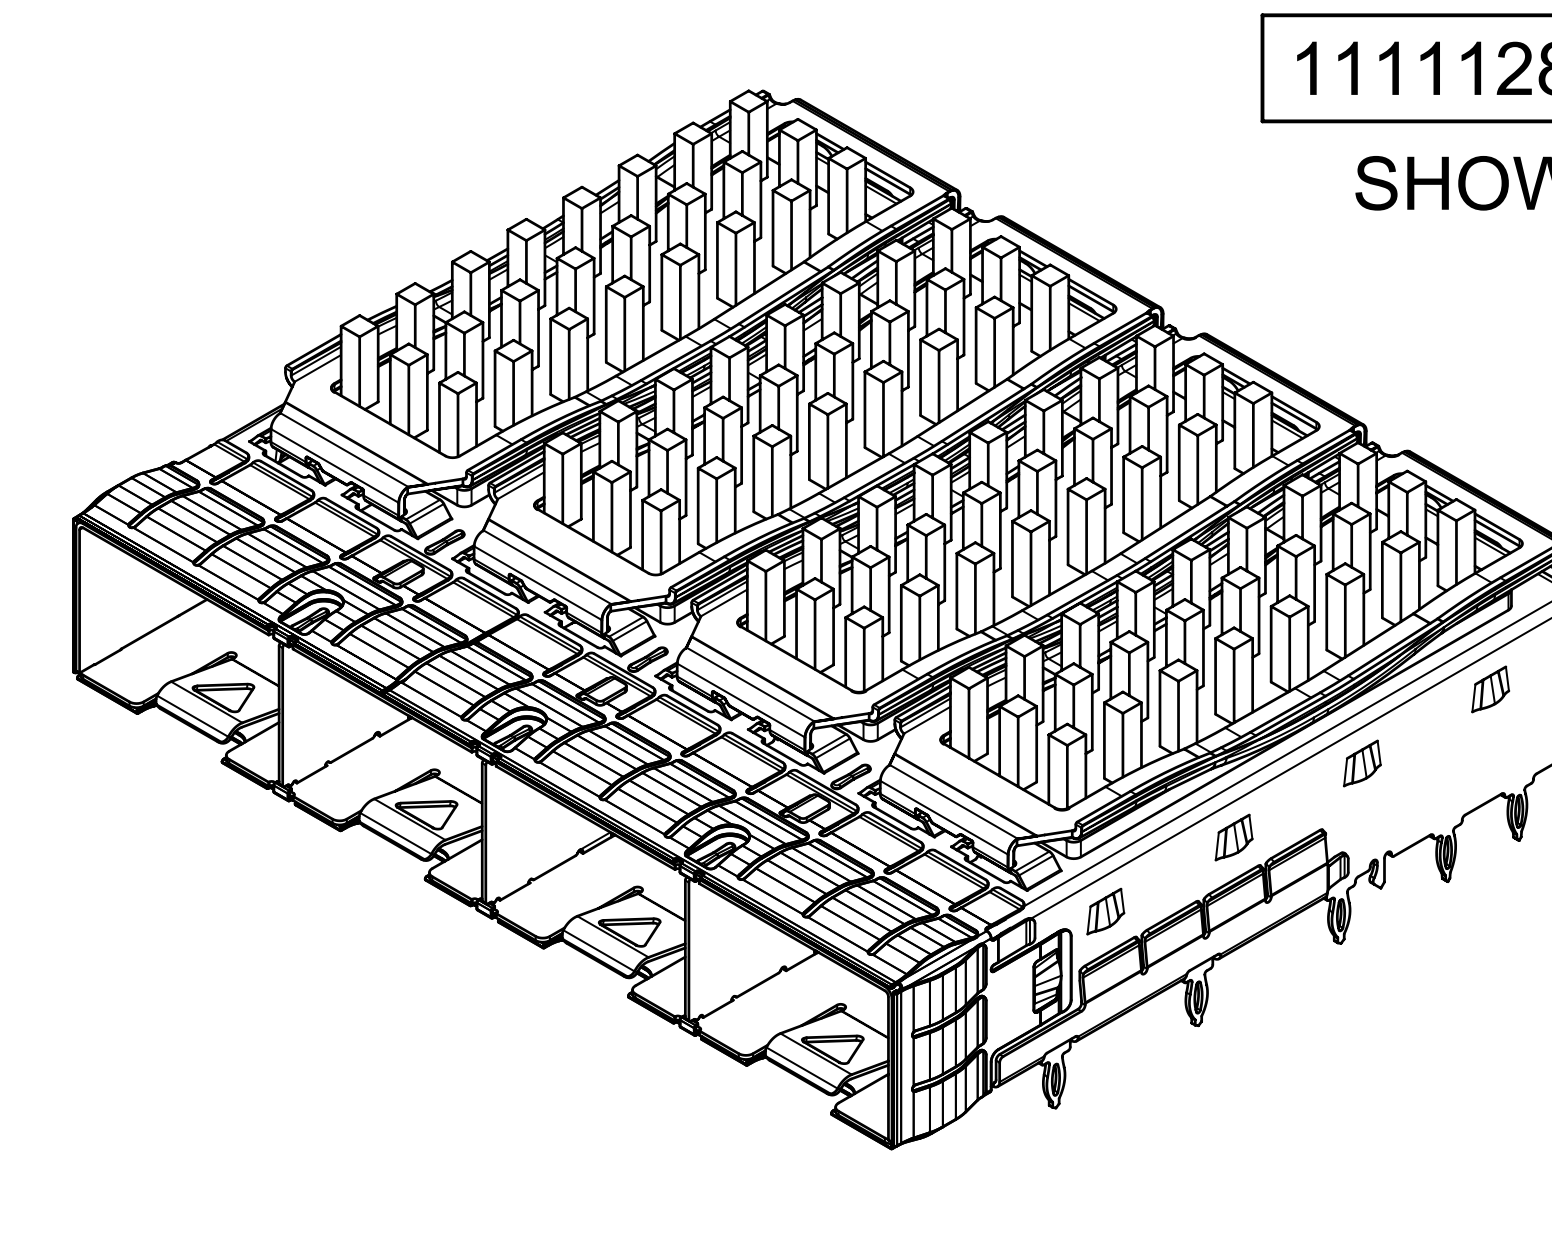

1111128420
SHOWN

SFP+ WIDE GAP PIN FIELD HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEAT SINK	# OF REAR LEGS PER PORT
1111127420	---	PCI	1A, 1B
1111127460	YES	PCI	1A, 1B
1111128420	---	SAN	1A, 1B
1111128460	YES	SAN	1A, 1B
1111129420	---	NET	1A, 1B
1111129460	YES	NET	1A, 1B

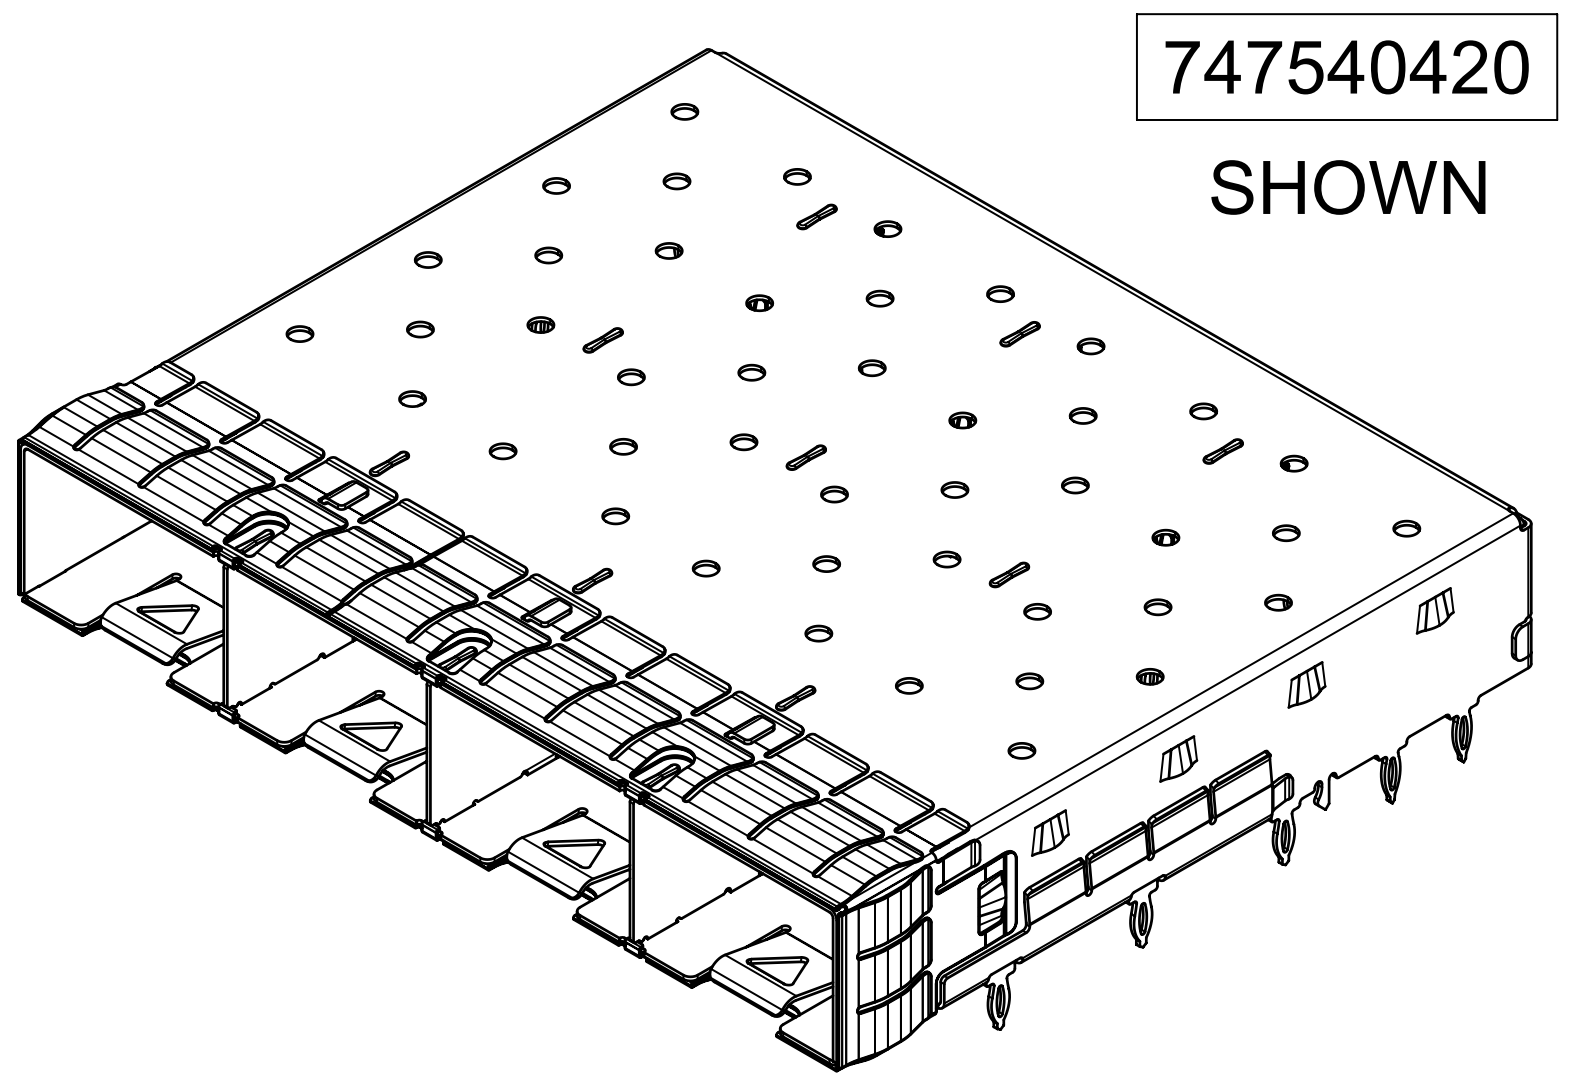

747540420
SHOWN

SFP+ OPEN TOP BASE CAGE FOR HEATSINK				
PART NO.	POLYIMIDE INSULATOR	WELD POINT QUANTITY	# OF REAR LEGS PER PORT	PLATING
747540420	---	6	1A, 1B	-----
747540422	---	6	3A	-----
747540423	---	19	1A, 1B	-----
747540427	YES (15mm MAX PITCH BETWEEN ANY 2 WELD POINTS)	6	1A, 1B	-----
747540464	---	6	1A, 1B	OVER ALL: MAT TIN PLATED 2.0μm MIN.

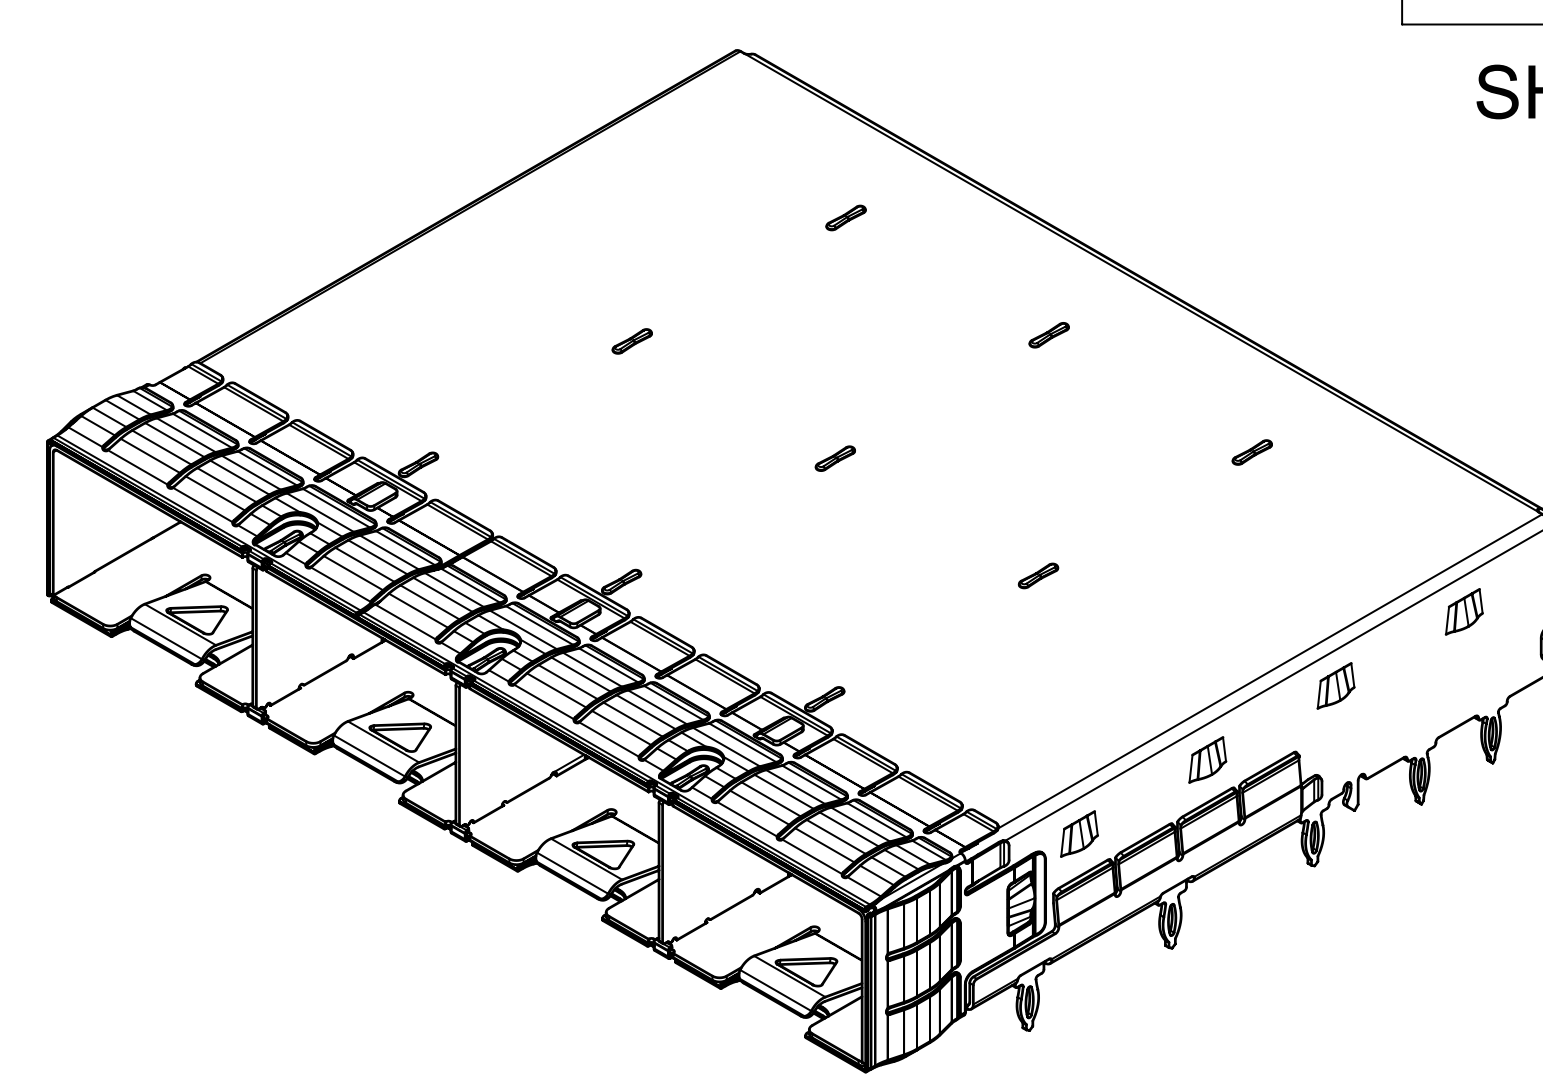

747540426
SHOWN

SFP+ CLOSED TOP BASE CAGE			
PART NO.	WELD POINT QUANTITY	# OF REAR LEGS PER PORT	PLATING
747540426	6 (15mm MAX PITCH BETWEEN ANY 2 WELD POINTS)	1A, 1B	OVER ALL: MAT TIN PLATED 2.0μM MIN.

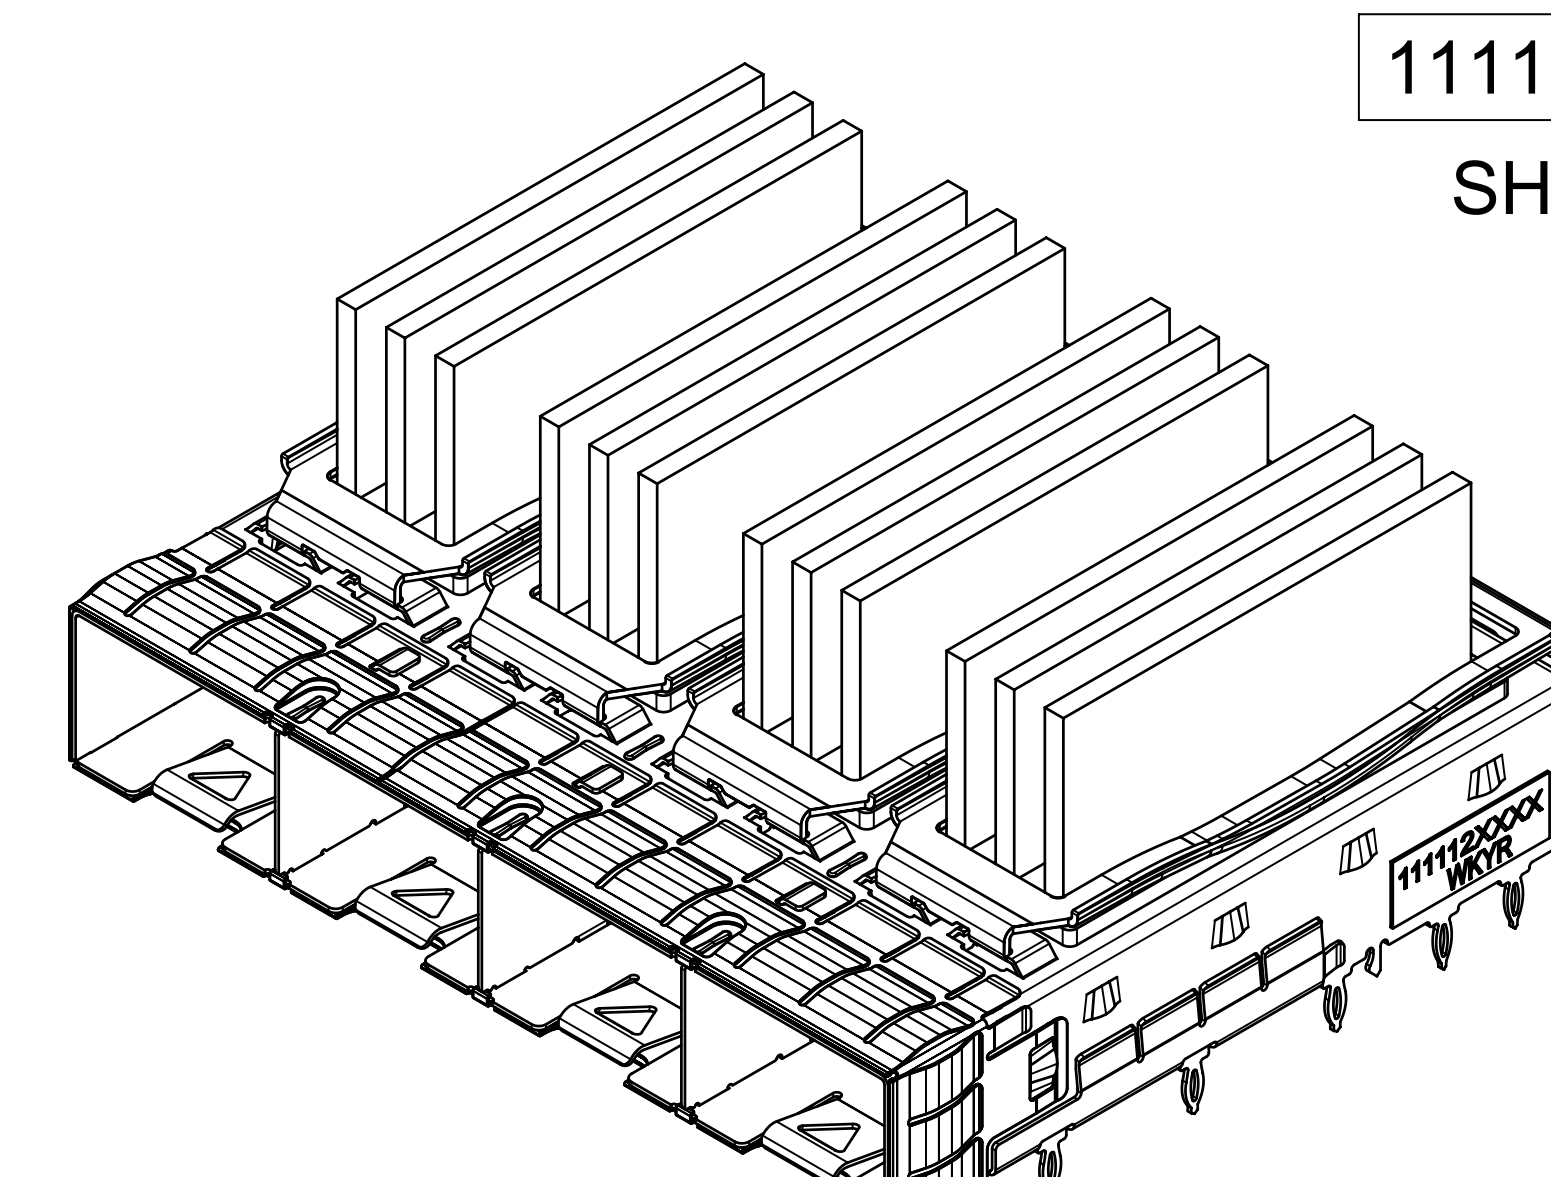

1111126421
SHOWN

SFP+ CUSTOM FIN HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEAT SINK	# OF REAR LEGS PER PORT
1111126421	---	CUSTOM	1A, 1B

SYMBOLS: = 0 (×9)

DIMENSION UNITS: mm | SCALE: 4:3
GENERAL TOLERANCES (UNLESS SPECIFIED)
ANGULAR TOL ± 1.0 °
4 PLACES ±
3 PLACES ±
2 PLACES ± 0.15
1 PLACE ± 0.25
0 PLACES ±
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: SEE REVISION TABLE
EC NO: 610317
DRWN: SMALLESHAPPA 2019/01/09
CHK'D: VK10 2019/01/11
APPR: RCHEN08 2019/01/15
INITIAL REVISION:
DRWN: VK10 2016/06/02
APPR: RCHEN08 2016/08/04
THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 111112

molex
SFP+ 1X4 SF CAGE 3.05 MM PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS
PRODUCT CUSTOMER DRAWING
DOCUMENT NUMBER: 1111122420 | DOC TYPE: PSD | DOC PART: ASY | REVISION: M
MATERIAL NUMBER: SEE TABLE | CUSTOMER: | SHEET NUMBER: 3 OF 8

DOCUMENT STATUS: P1 | RELEASE DATE: 2019/01/15 04:22:10

PCB LAYOUT FOR SINGLE SIDE MOUNT

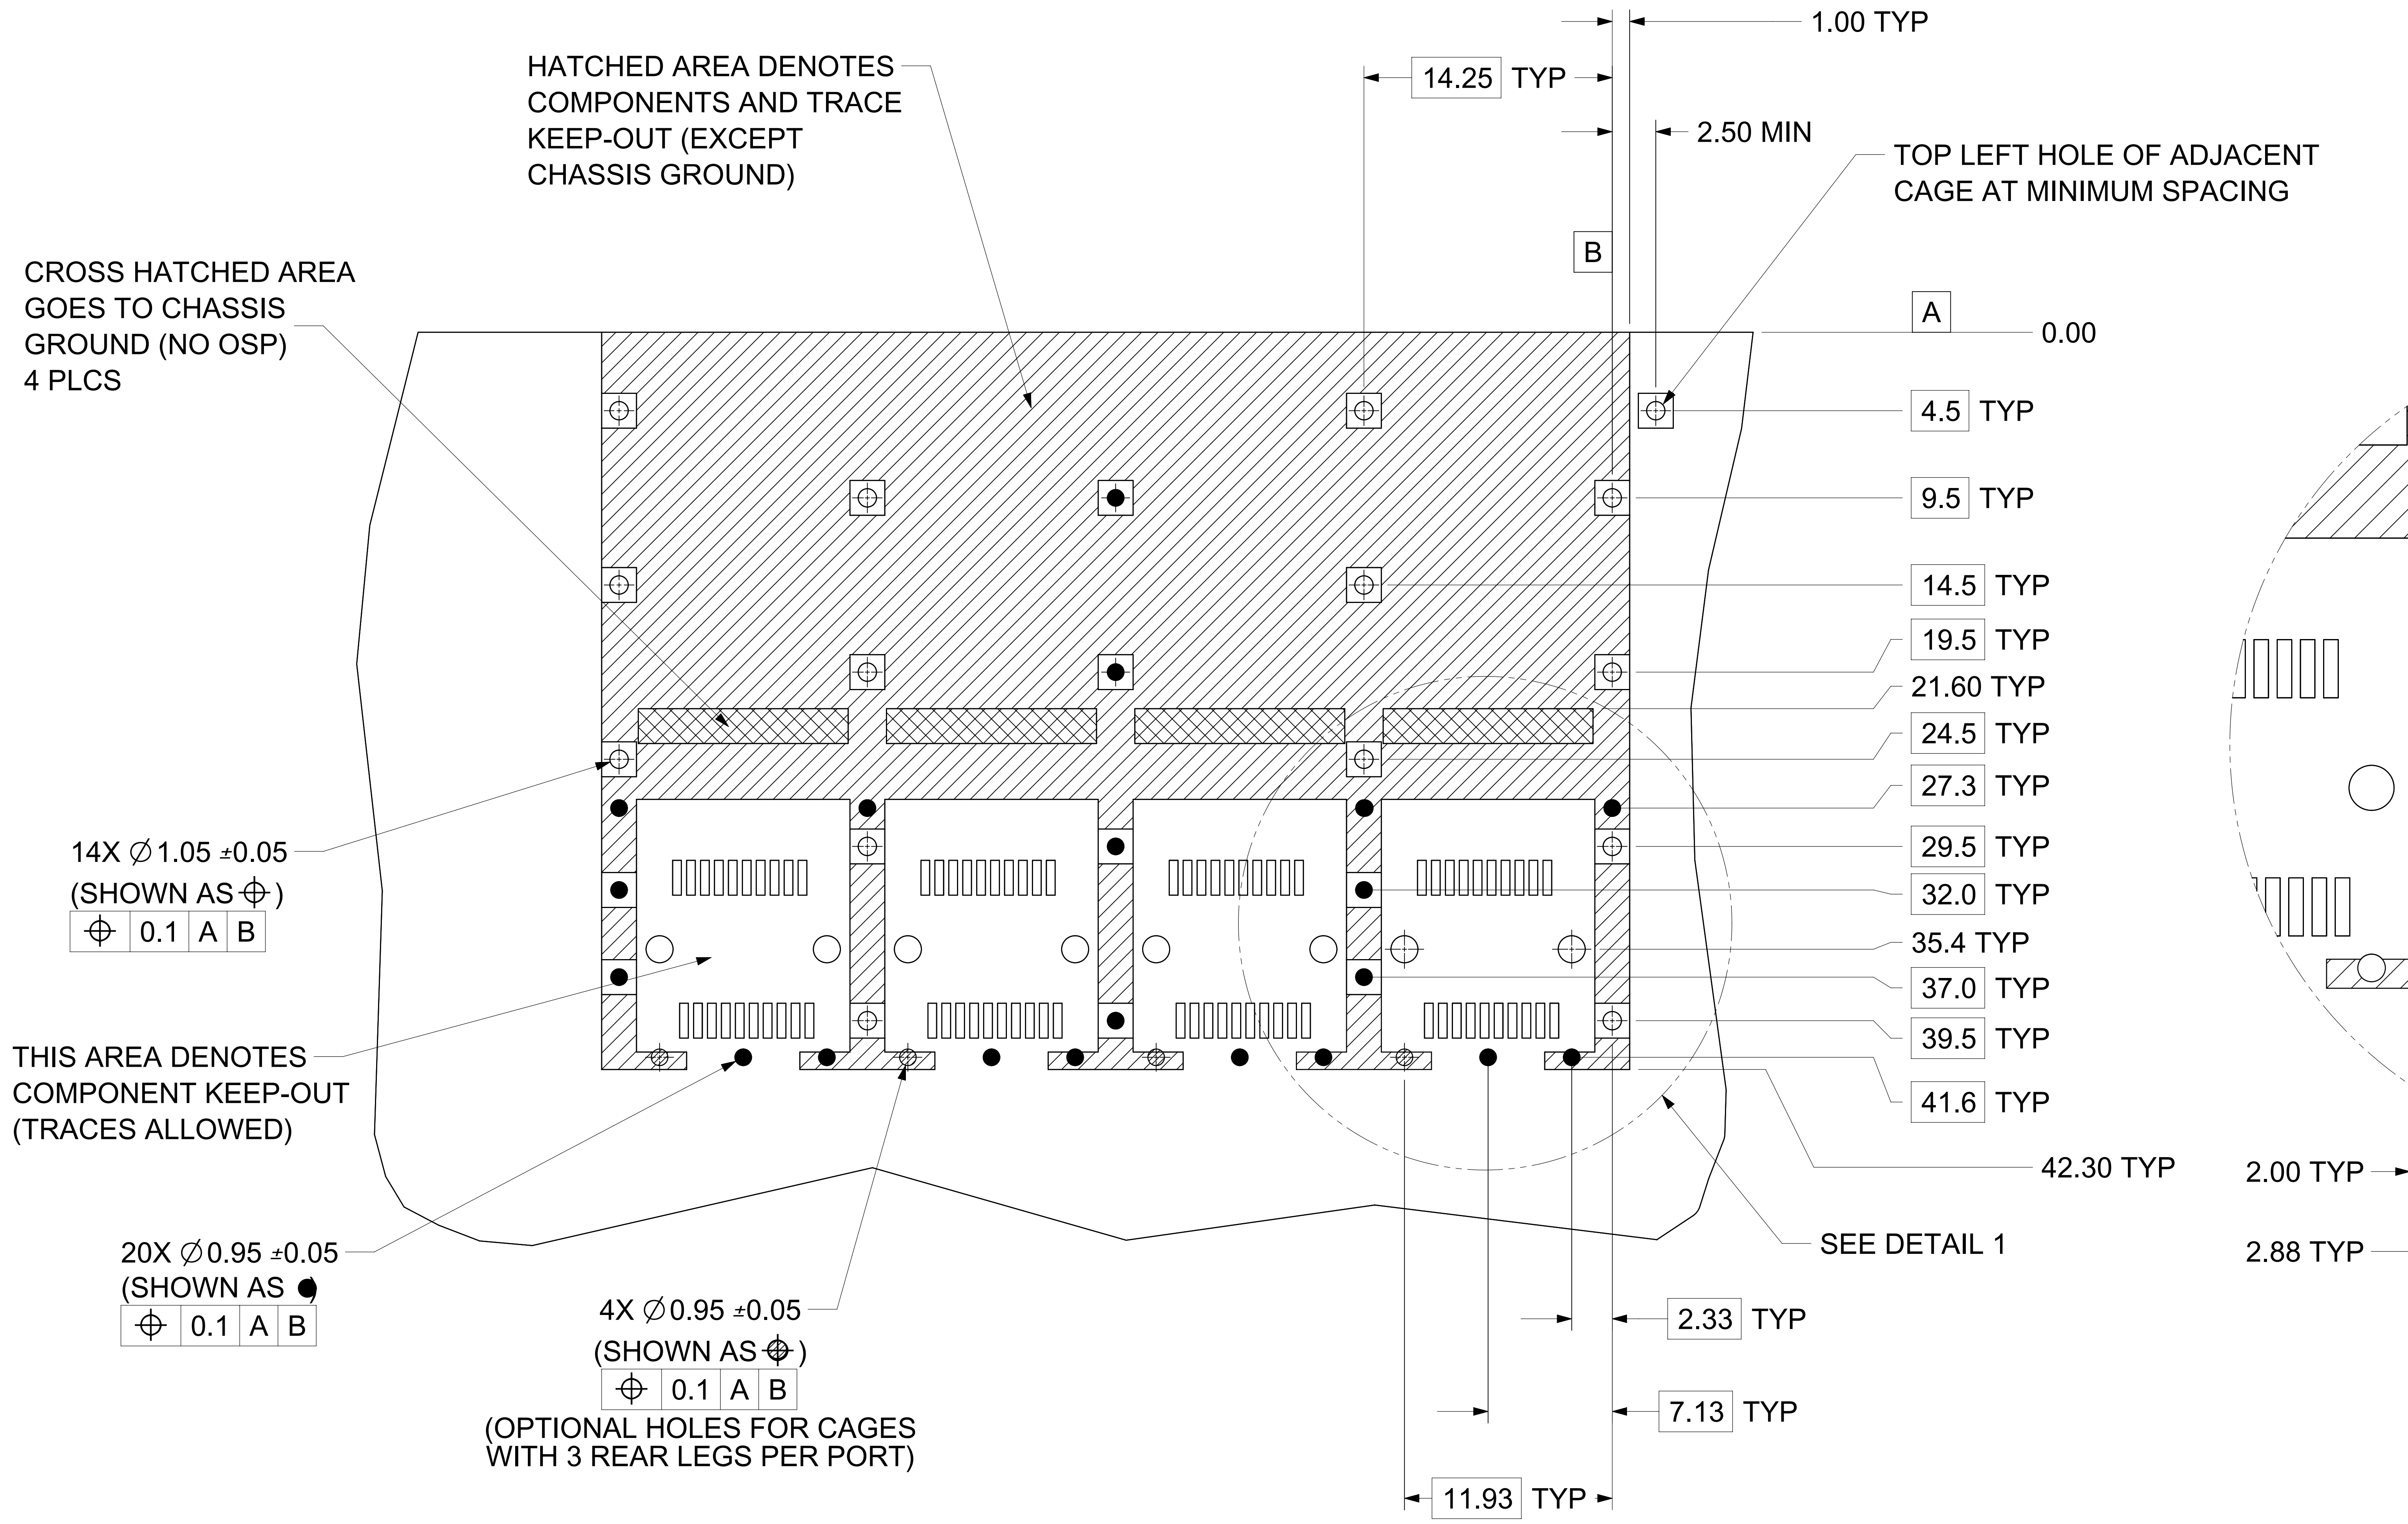

HOST CONNECTOR DETAIL

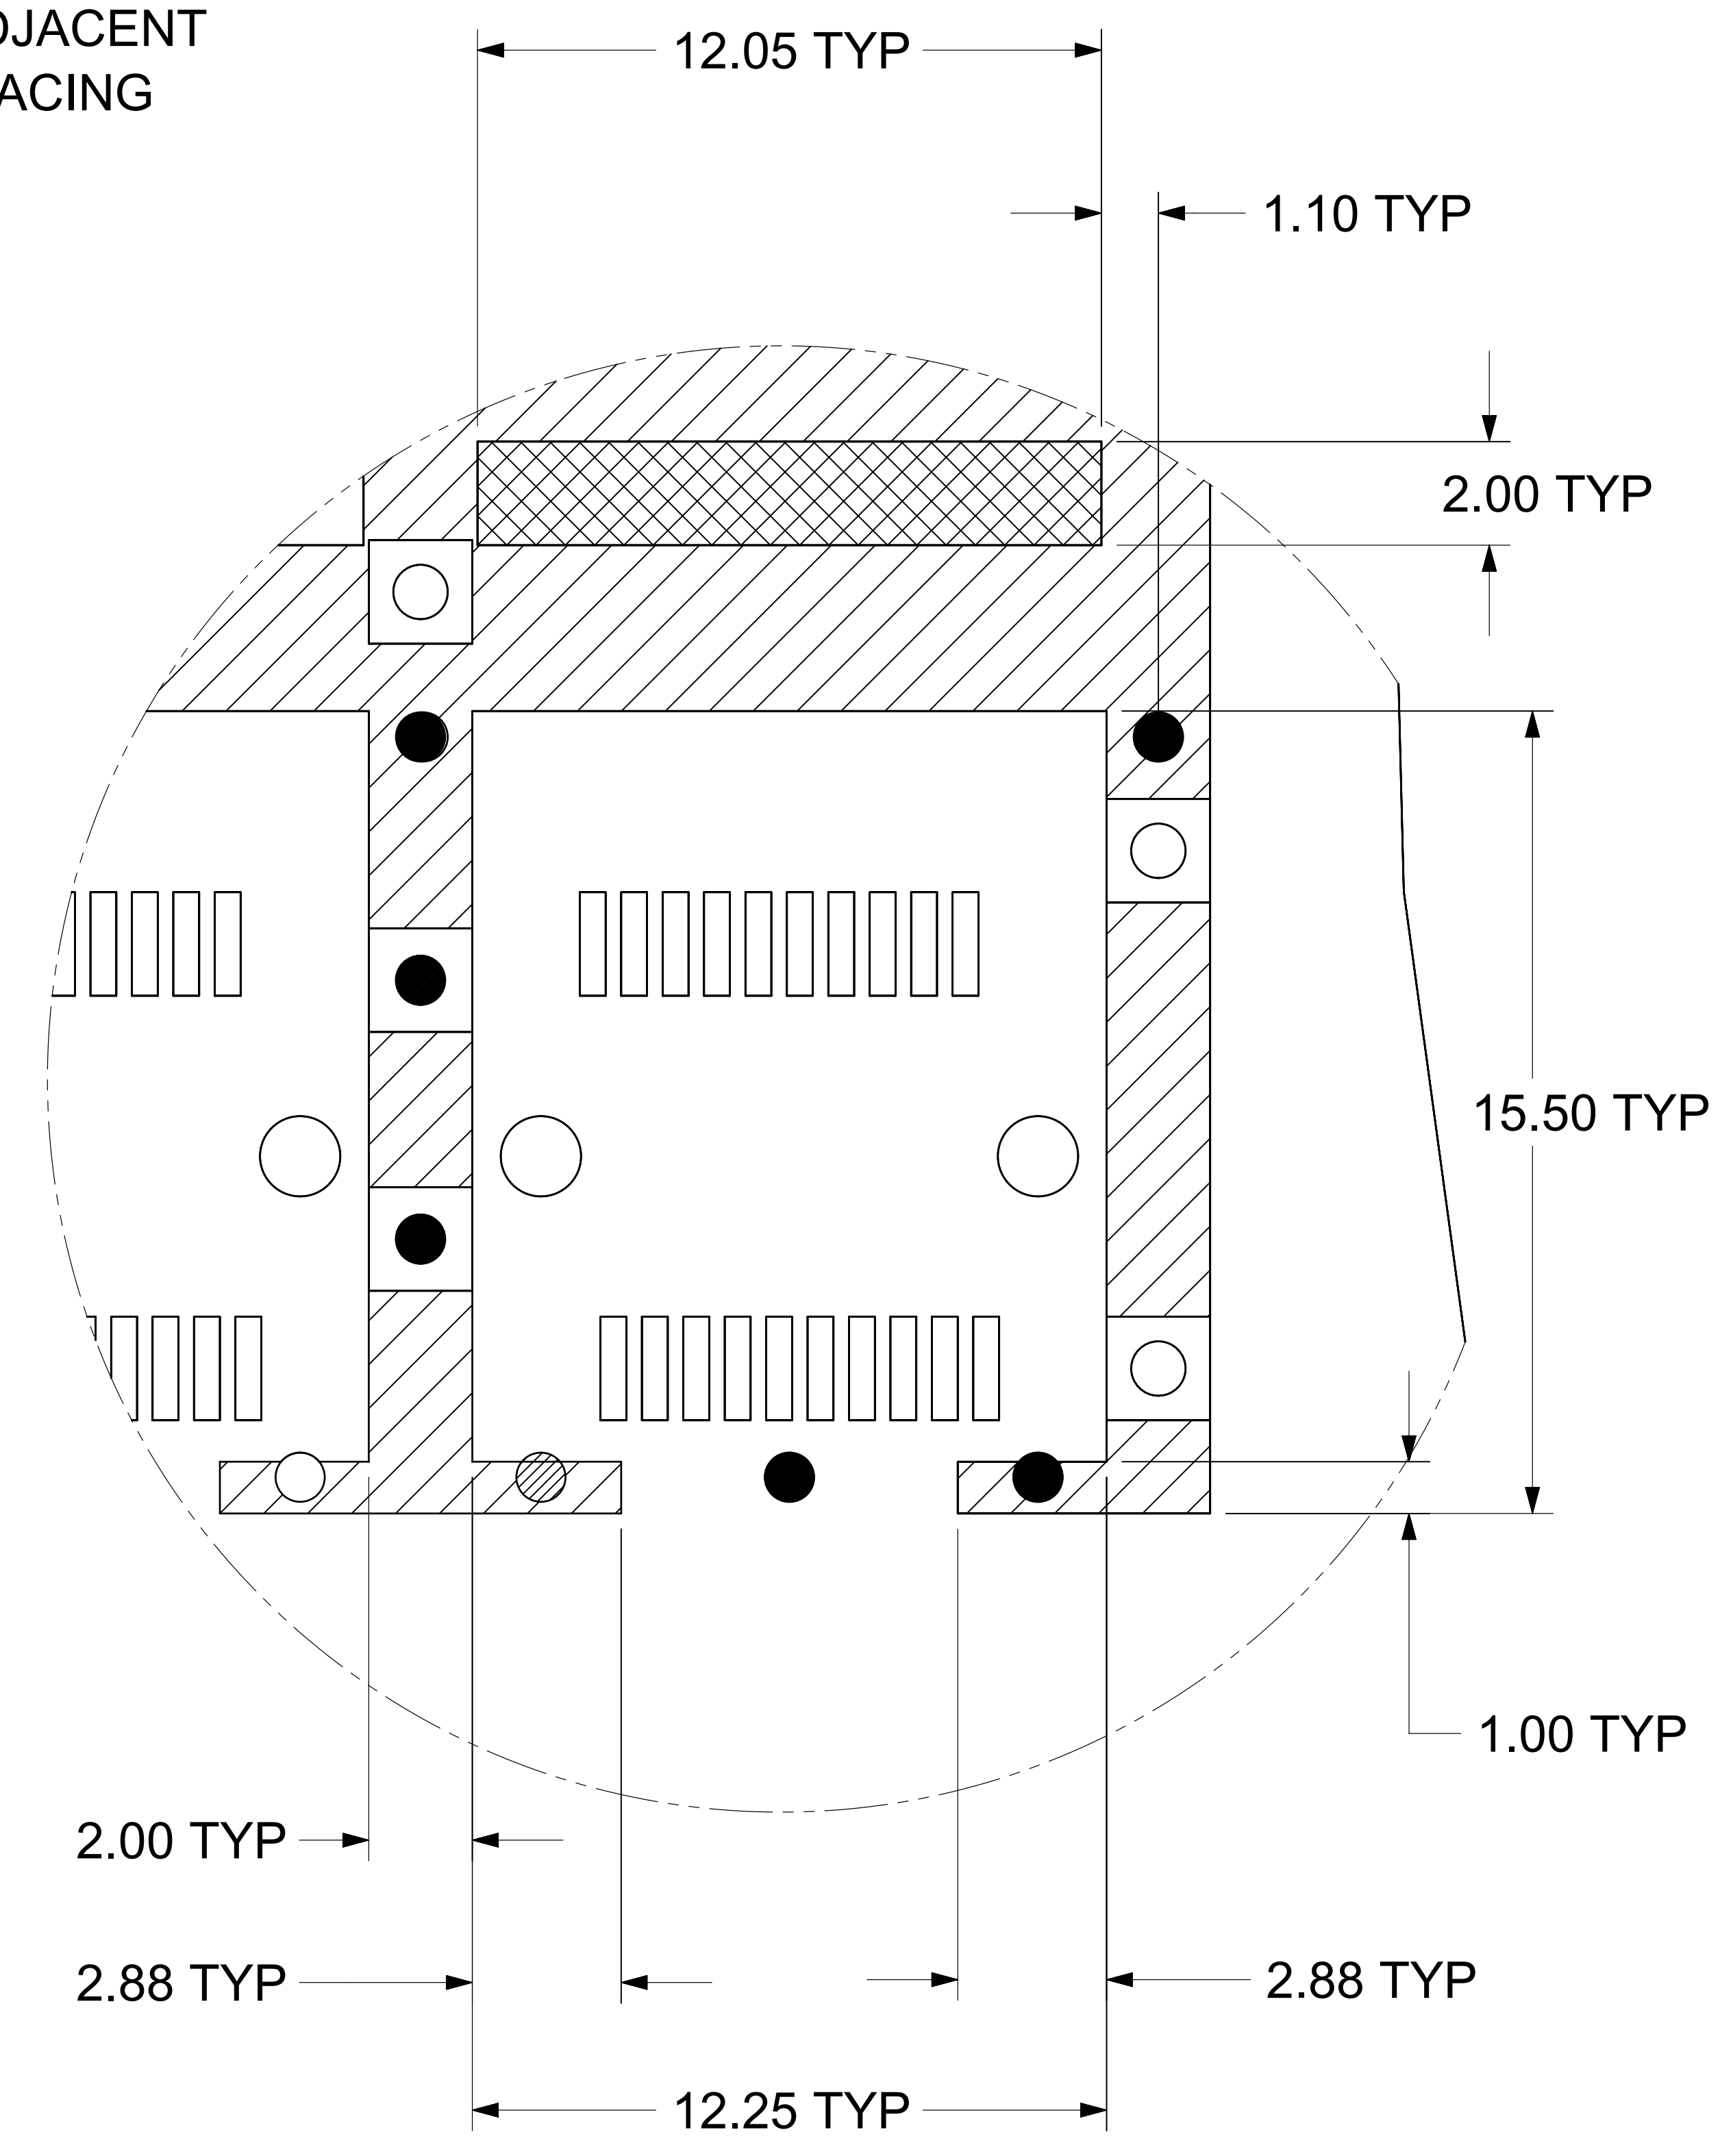

DETAIL 1
SCALE 8:1

NOTES:
1. PADS AND VIAS CONNECT TO CHASSIS GROUND (RECOMMENDED PADS TO BE 2.00mm SQUARE)
2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
3. CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT
4. HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25mm
5. MINIMUM PCB THICKNESS FOR SINGLE SIDED USE 1.57mm.

SYMBOLS	DIMENSION UNITS: mm	SCALE: 3:1
= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	
= 0	ANGULAR TOL ±	1.0 °
= 0	4 PLACES ±	
= 0	3 PLACES ±	
= 0	2 PLACES ±	0.15
= 0	1 PLACE ±	0.25
= 0	0 PLACES ±	
= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC: SEE REVISION TABLE

EC NO:	610317	
DRWN:	SMALLESHAPPA	2019/01/09
CHK'D:	VK10	2019/01/11
APPR:	RCHEN08	2019/01/15
INITIAL REVISION:		
DRWN:	VK10	2016/06/02
APPR:	RCHEN08	2016/08/04

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 111112

molex

SFP+ 1X4 SF CAGE 3.05 MM
PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1111122420	PSD	ASY	M

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE SHEET 3		4 OF 8

DOCUMENT STATUS	P1	RELEASE DATE	2019/01/15 04:22:10

PCB LAYOUT FOR BELLY TO BELLY MOUNTING

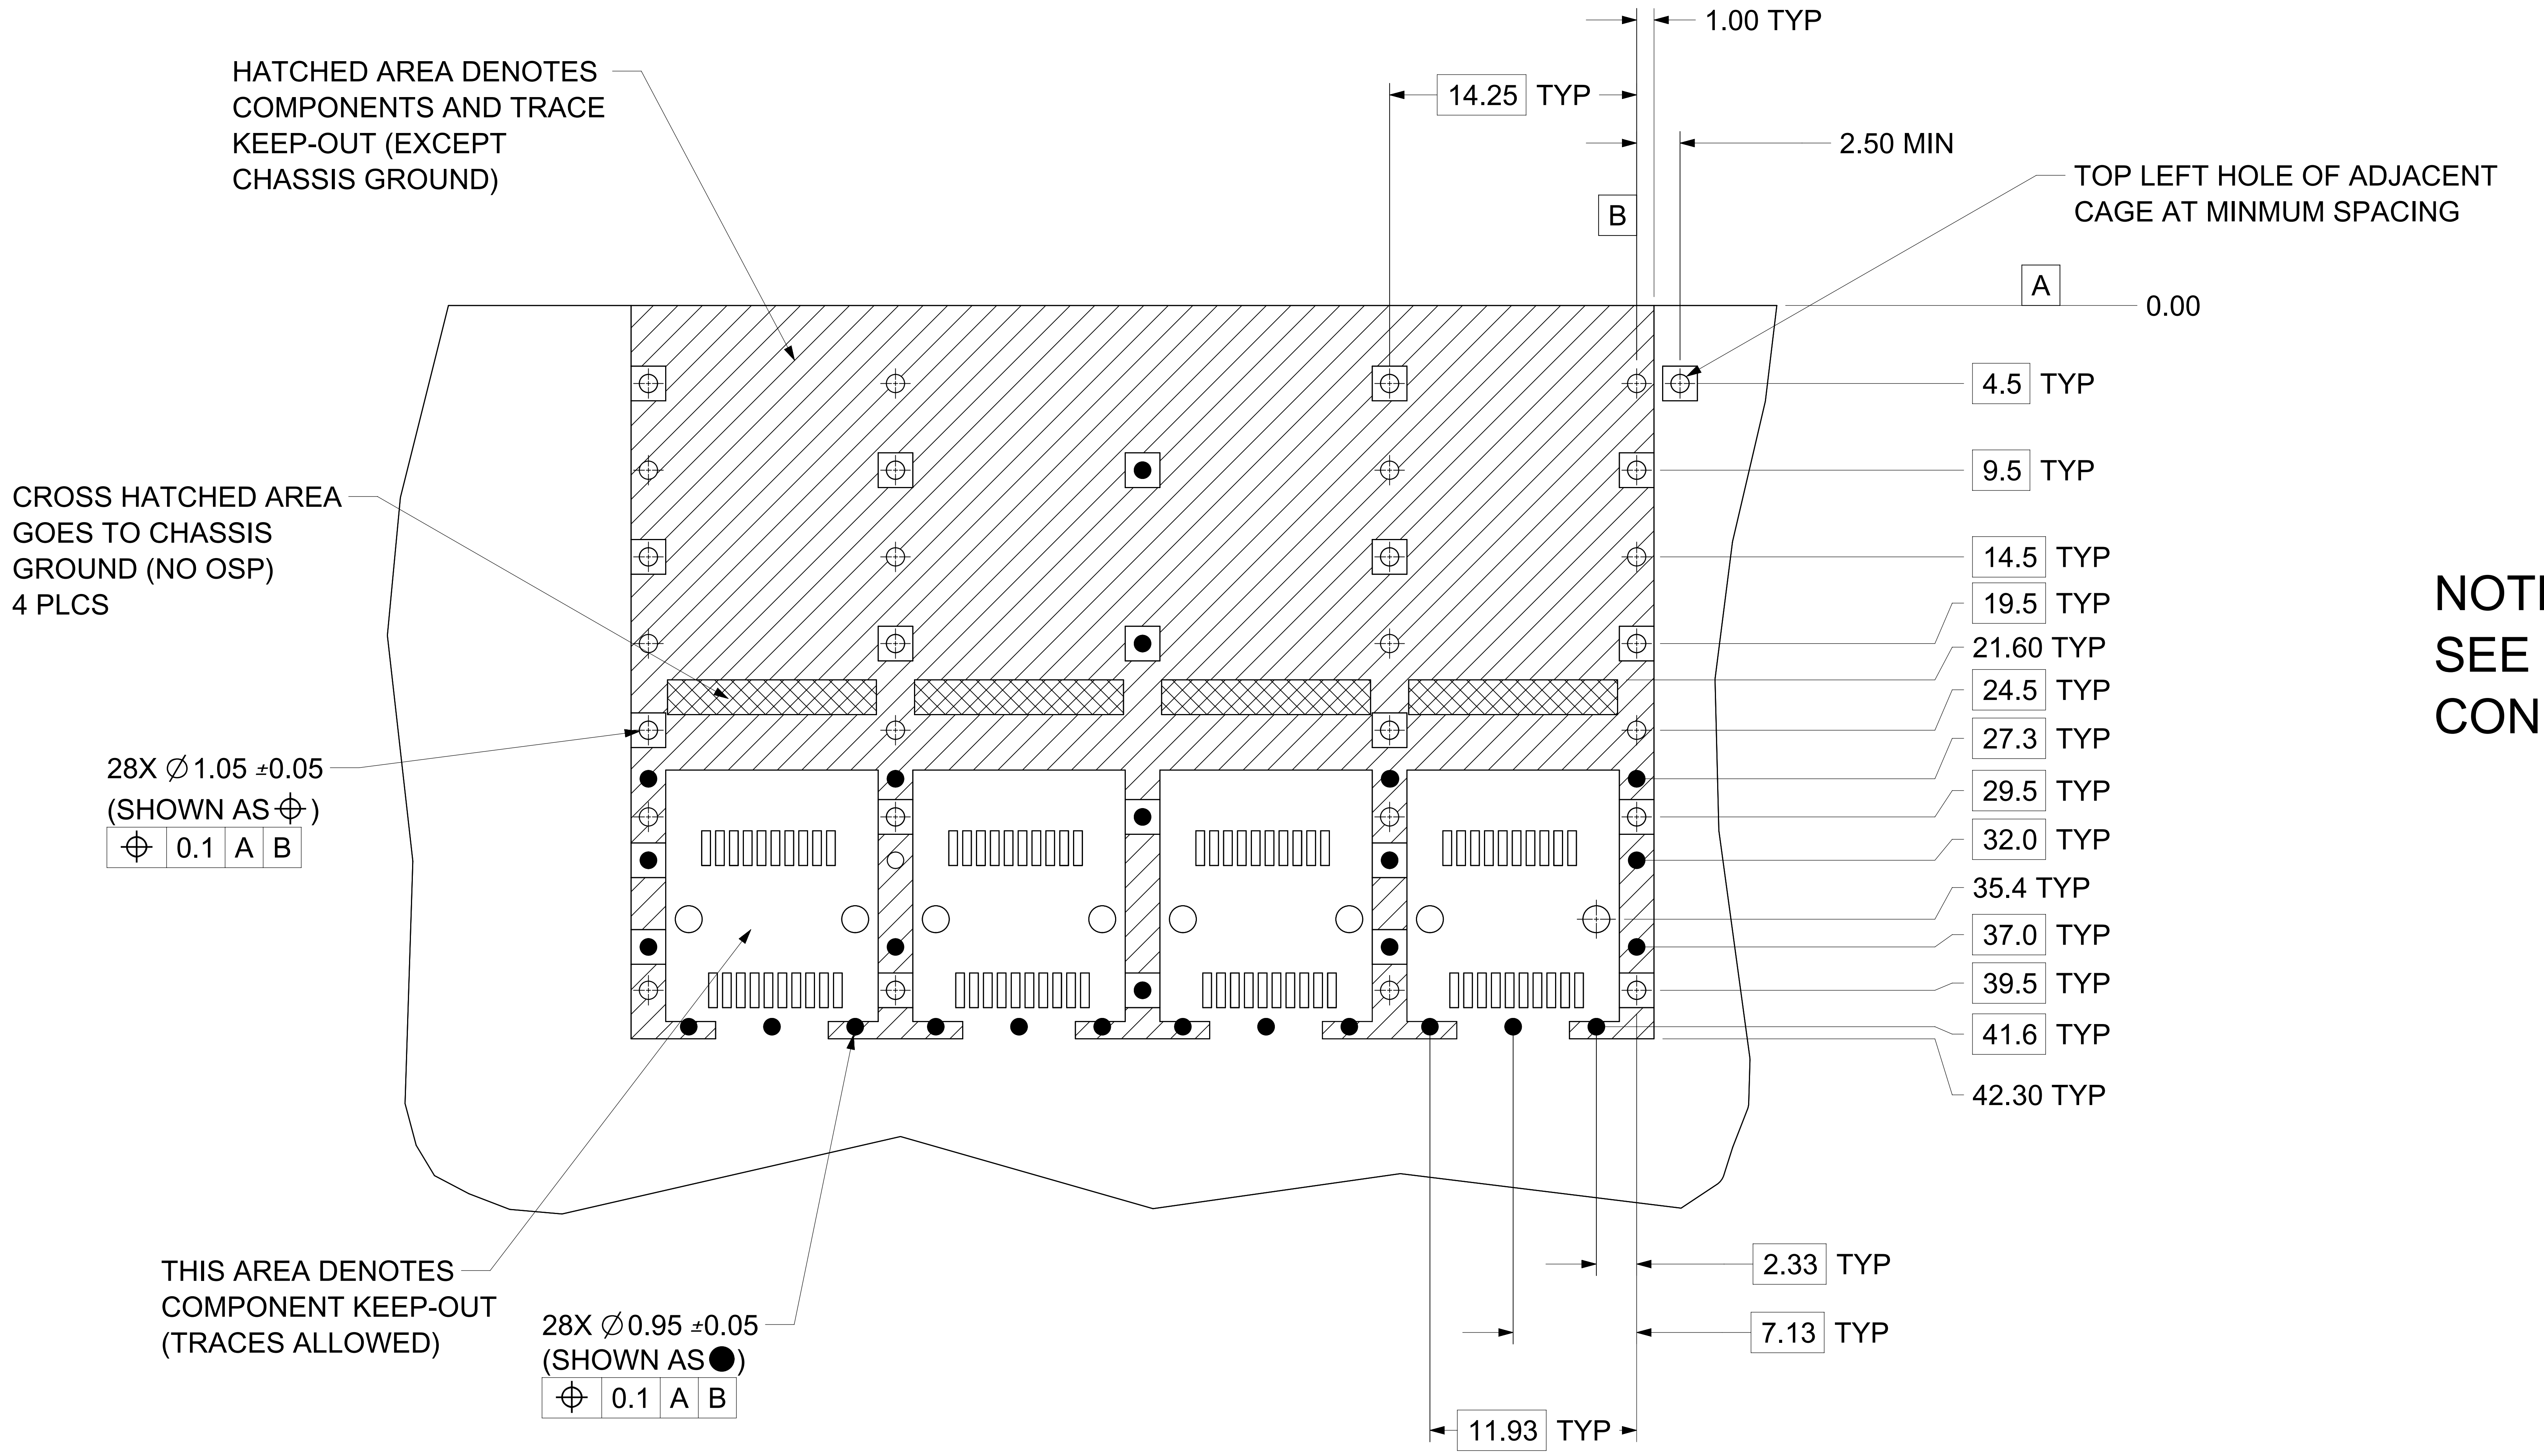

NOTE:
SEE SHEET 5 FOR HOST CONNECTOR DETAIL

NOTES:
1. PADS AND VIAS CONNECT TO CHASSIS GROUND (RECOMMENDED PADS TO BE 2.00mm SQUARE)
2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
3. CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT
4. HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25mm
5. MINIMUM PCB THICKNESS FOR BELLY TO BELLY USE 3.00mm.

DOCUMENT STATUS	P1	RELEASE DATE	2019/01/15 04:22:10

SYMBOLS	DIMENSION UNITS: mm	SCALE: 3:1
GENERAL TOLERANCES (UNLESS SPECIFIED)		
ANGULAR TOL	±	1.0 °
4 PLACES	±	
3 PLACES	±	
2 PLACES	±	0.15
1 PLACE	±	0.25
0 PLACES	±	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

CURRENT REV DESC: SEE REVISION TABLE

EC NO:	610317	
DRWN:	SMALLESHAPPA	2019/01/09
CHK'D:	VK10	2019/01/11
APPR:	RCHEN08	2019/01/15
INITIAL REVISION:		
DRWN:	VK10	2016/06/02
APPR:	RCHEN08	2016/08/04

molex

SFP+ 1X4 SF CAGE 3.05 MM
PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1111122420	PSD	ASY	M

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	C-SIZE	111112	SEE SHEET 3		5 OF 8

BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING (SPRING FINGER)

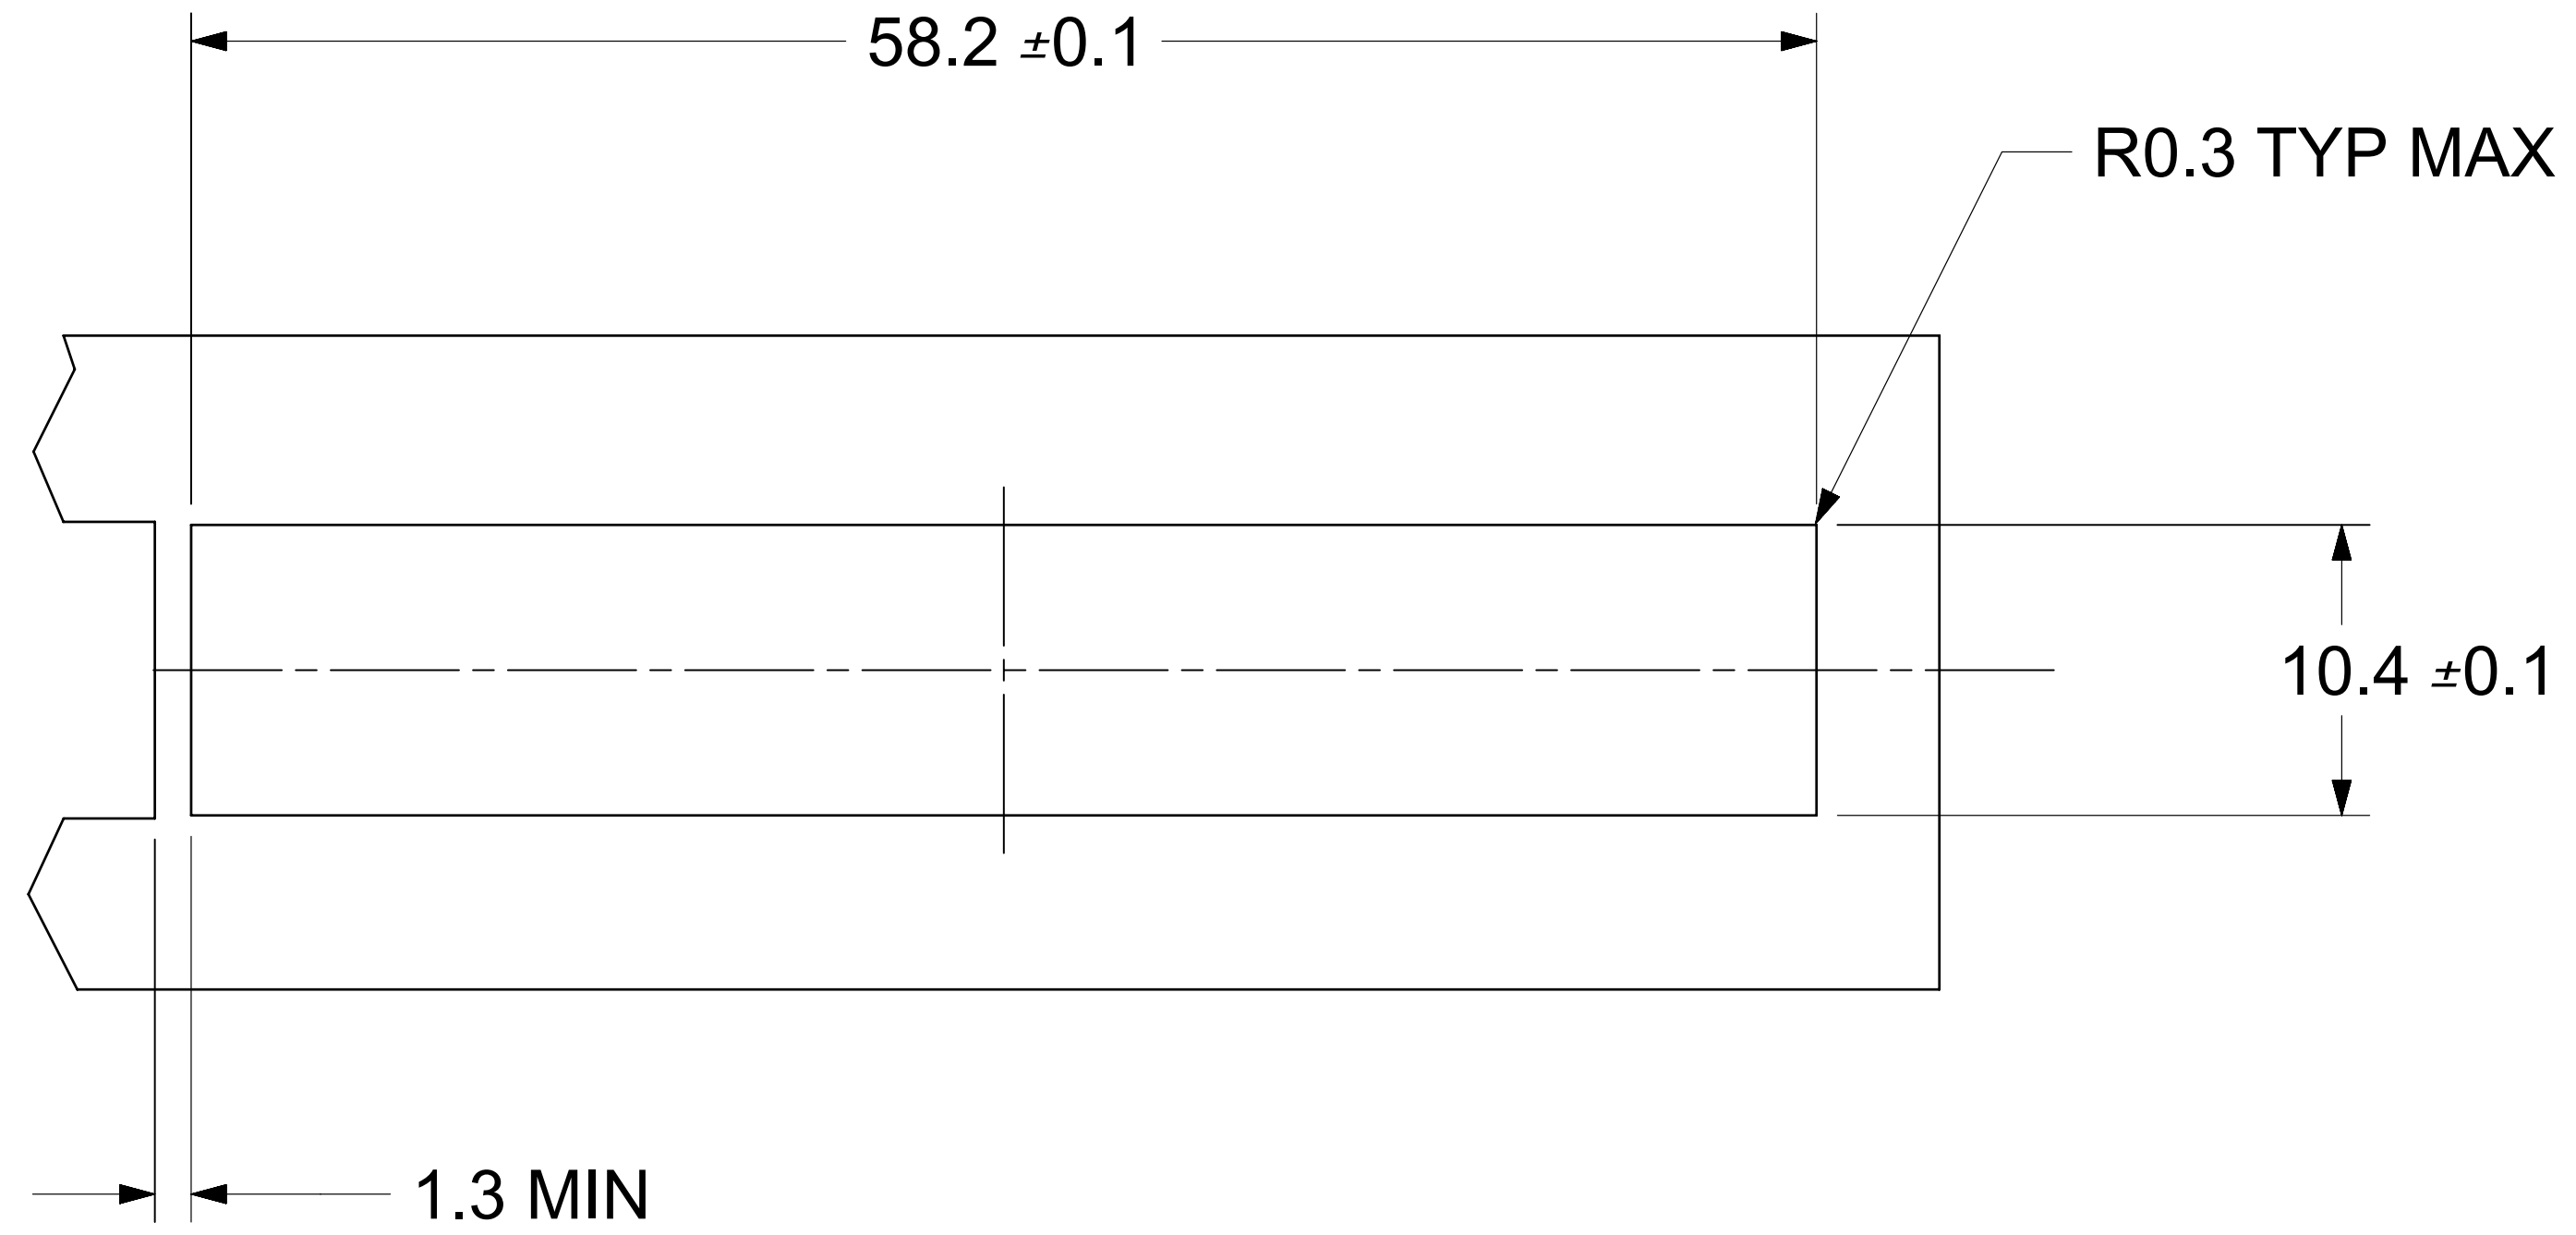

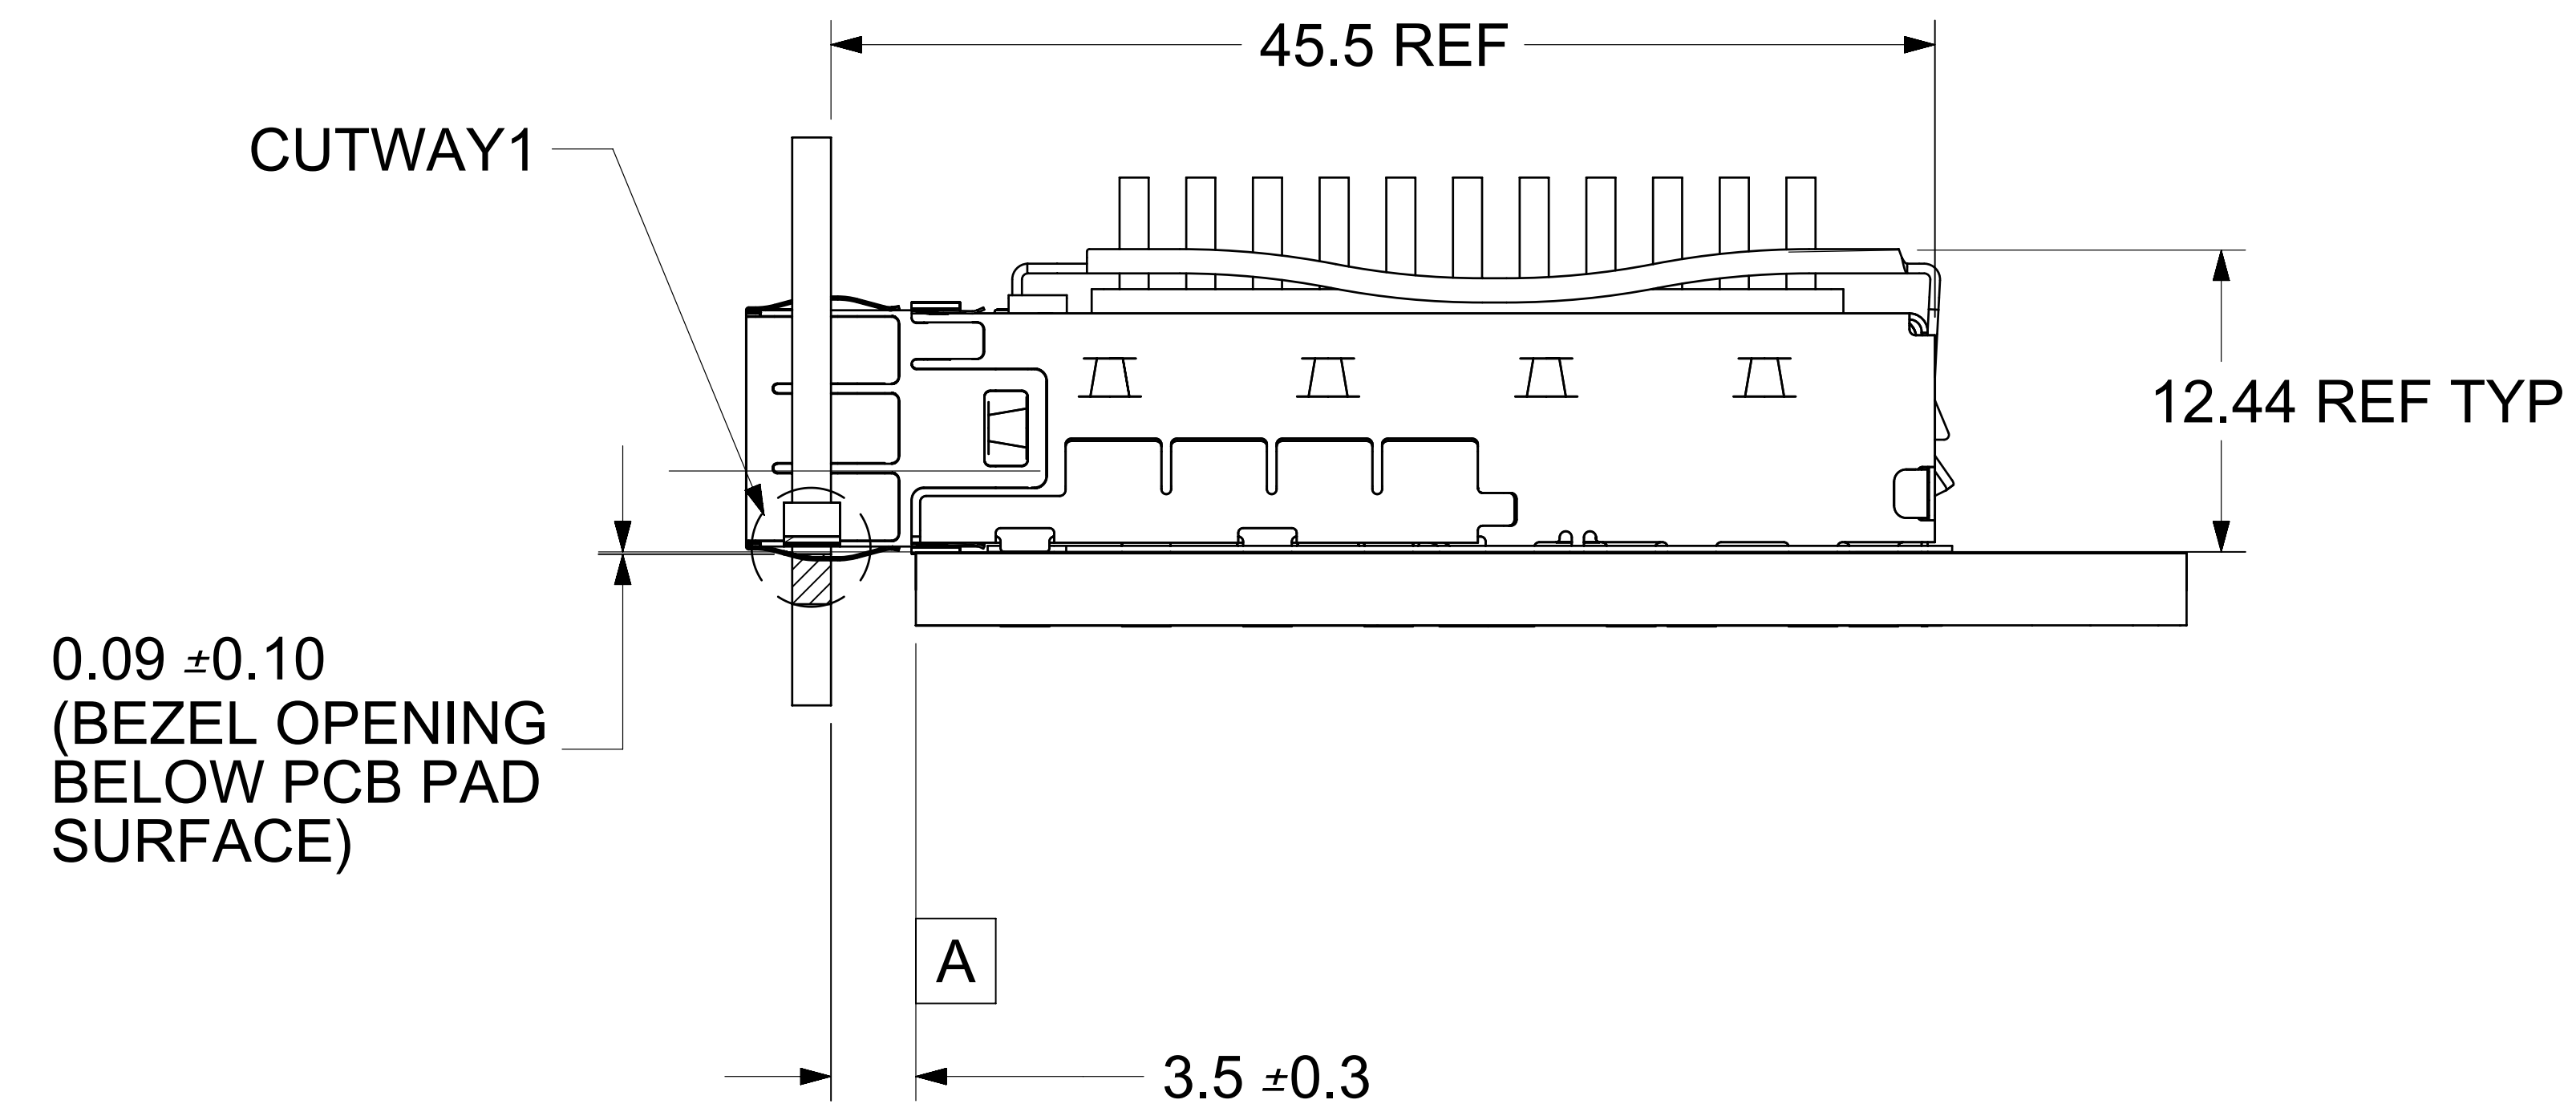

BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING (SPRING FINGER)

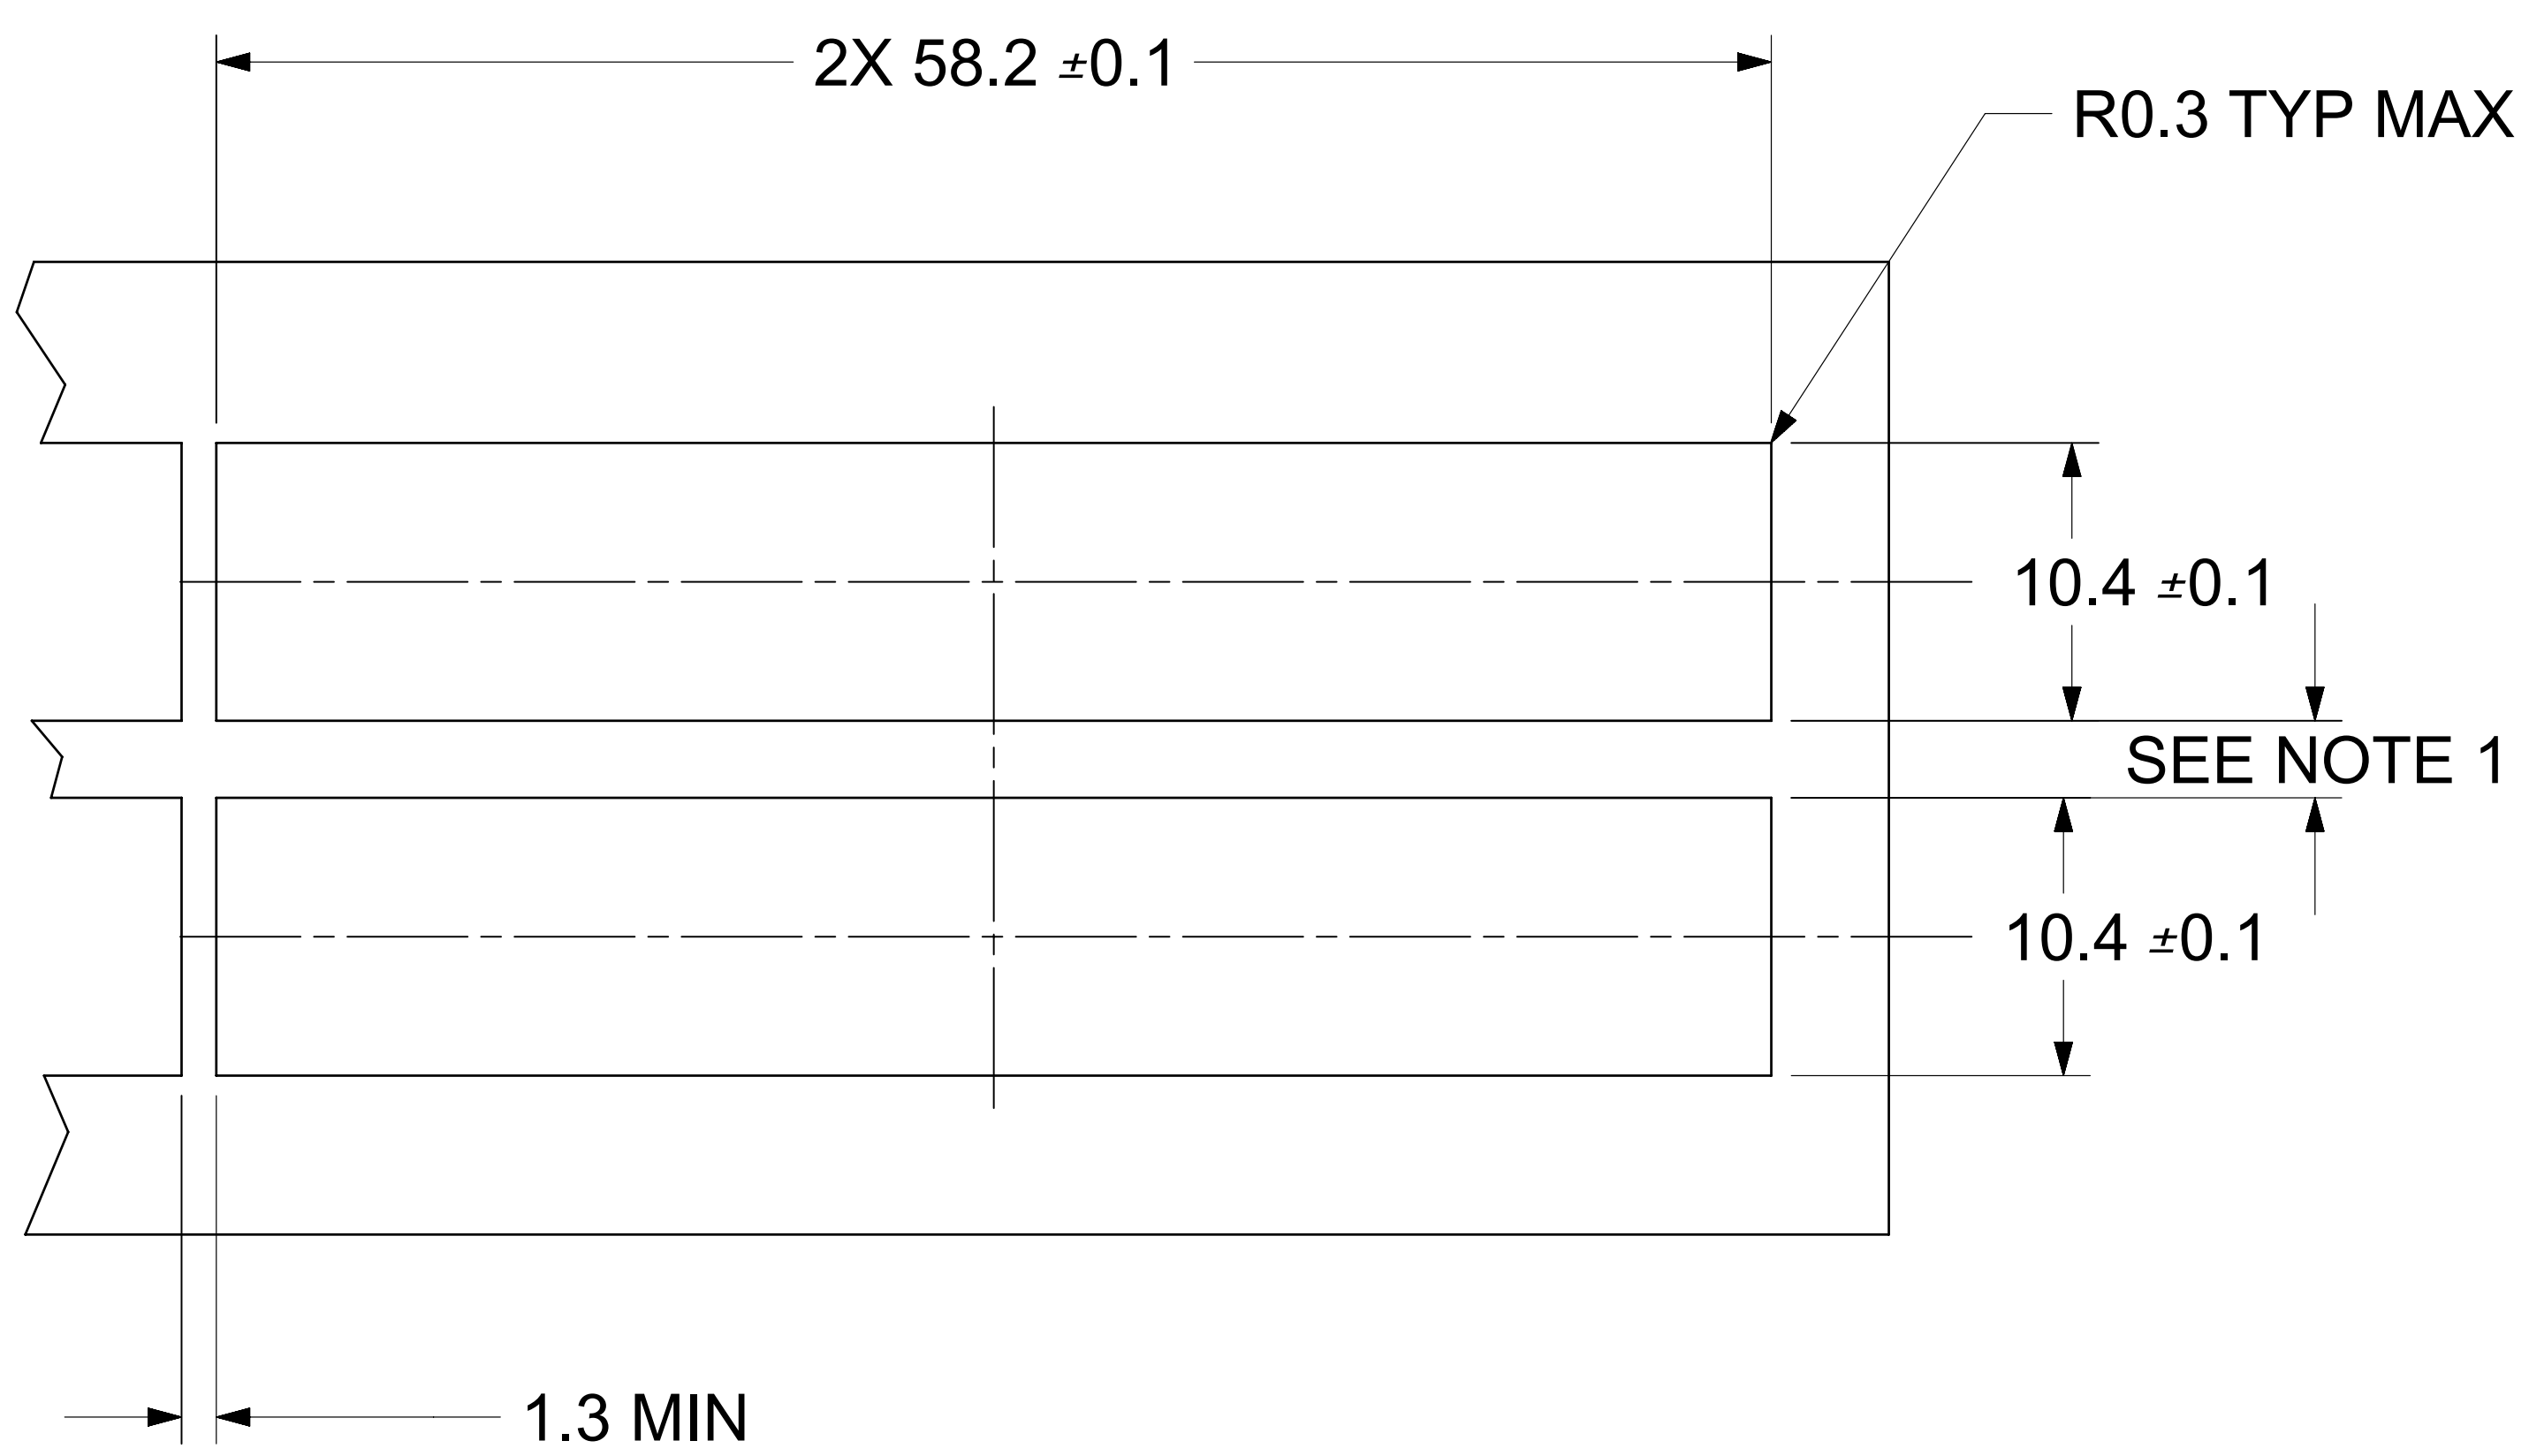

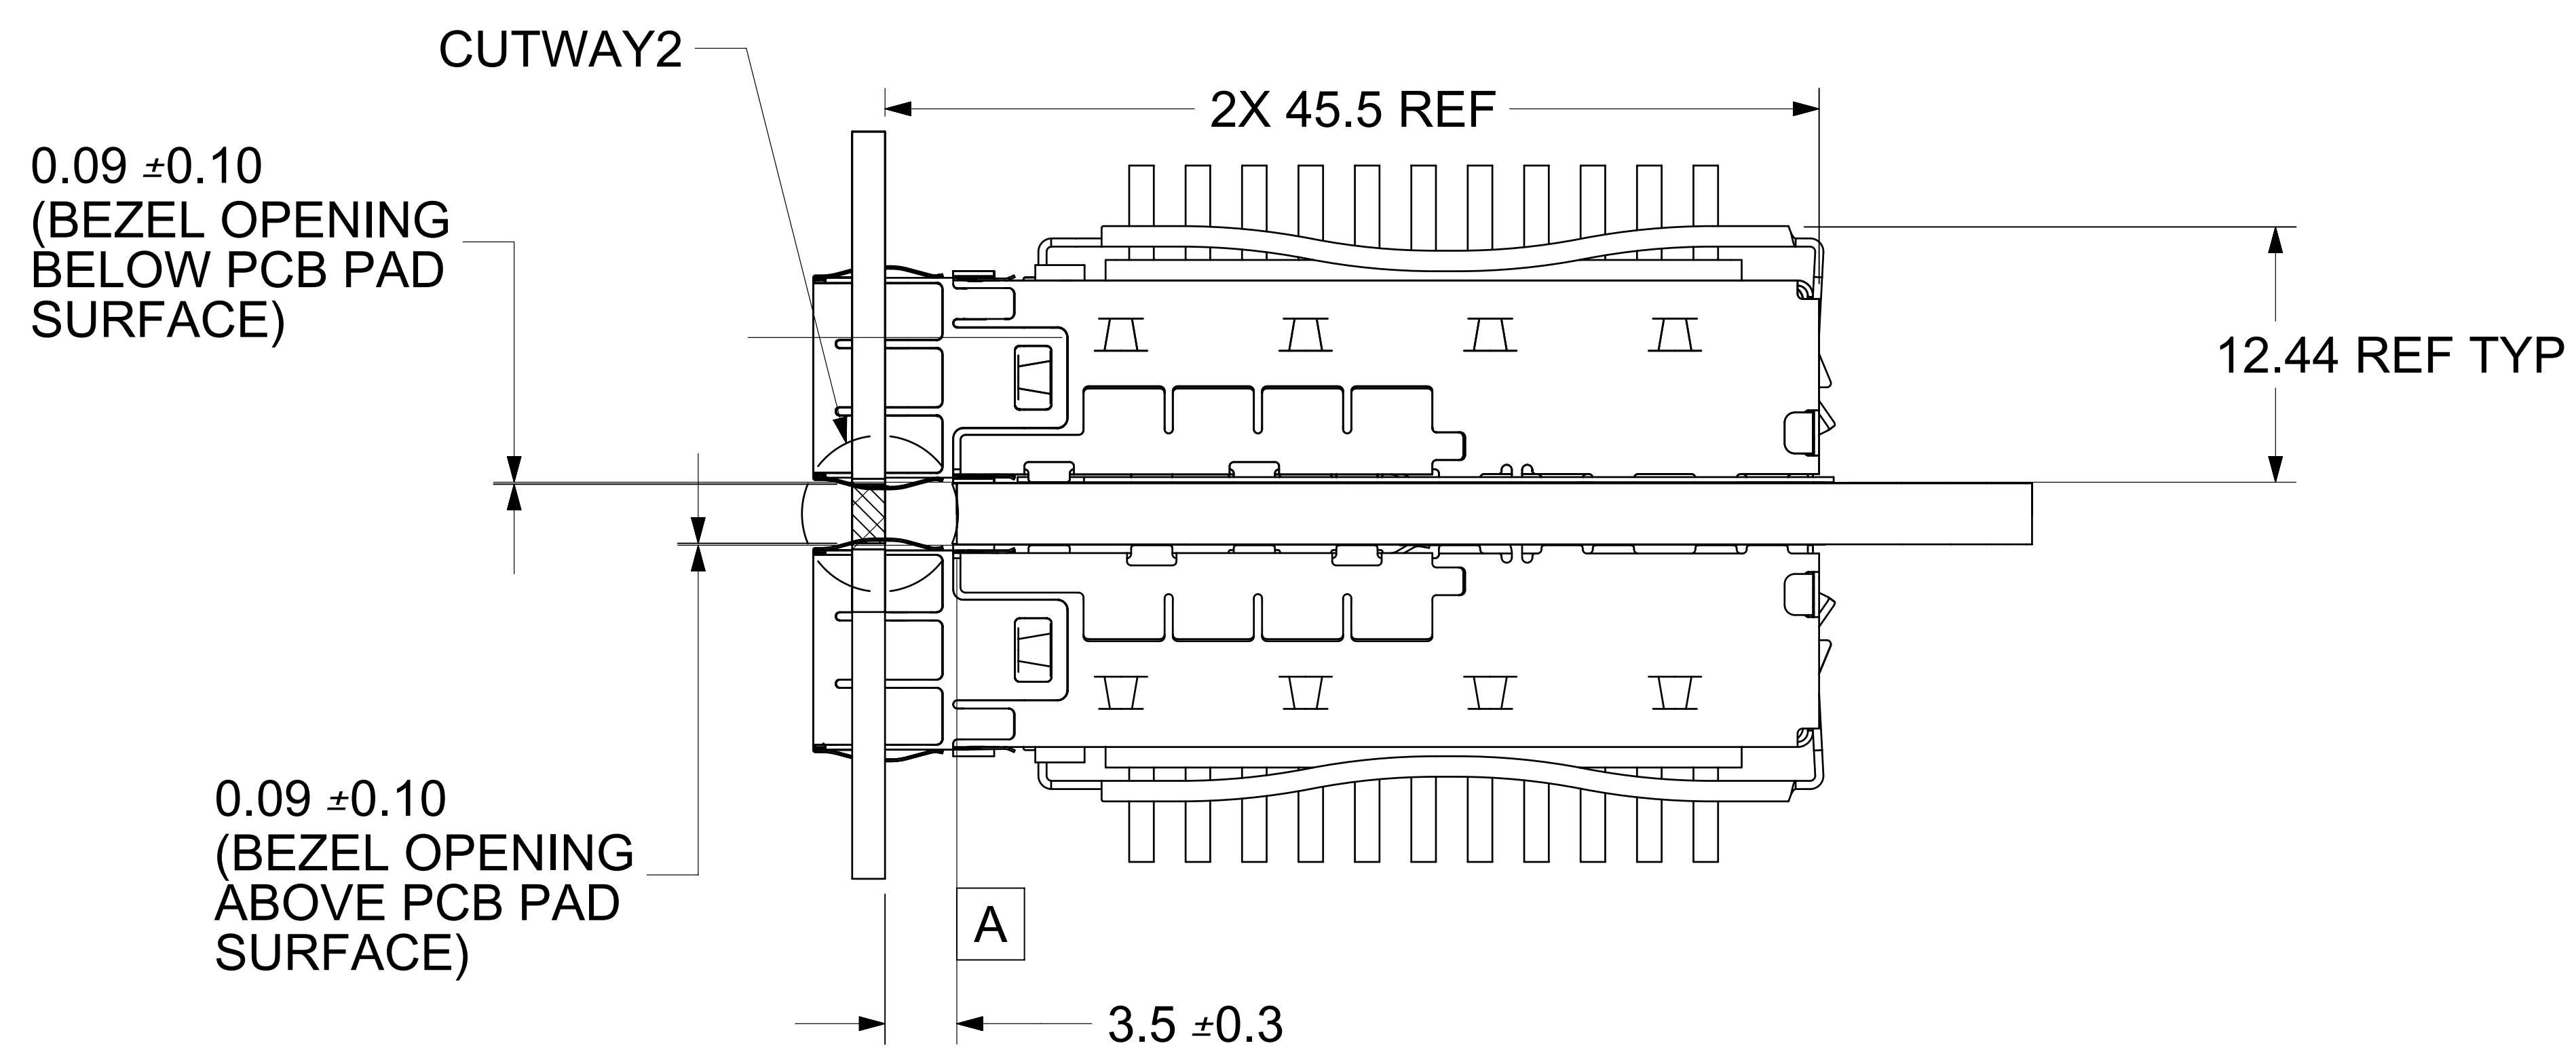

NOTE:
1. PCB THICKNESS VARIATION MUST BE CONSIDERED WHEN DETERMINING BEZEL OPENING LOCATION.
2. CAGE LEG STANDOFF WILL PIERCE BELLY GASKET WHEN PROPERLY PRESSED INTO PCB.

SYMBOLS: = 0 (each of nine symbols)

DIMENSION UNITS: mm | SCALE: 2:1

GENERAL TOLERANCES (UNLESS SPECIFIED)

ANGULAR TOL	±	1.0 °
4 PLACES	±	
3 PLACES	±	
2 PLACES	±	0.15
1 PLACE	±	0.25
0 PLACES	±	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

CURRENT REV DESC: SEE REVISION TABLE

EC NO:	610317	
DRWN:	SMALLESHAPPA	2019/01/09
CHK'D:	VK10	2019/01/11
APPR:	RCHEN08	2019/01/15

INITIAL REVISION:

DRWN:	VK10	2016/06/02
APPR:	RCHEN08	2016/08/04

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 111112

molex

SFP+ 1X4 SF CAGE 3.05 MM
PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1111122420	PSD	ASY	M

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE SHEET 3		6 OF 8

DOCUMENT STATUS	P1	RELEASE DATE	2019/01/15 04:22:10

REV	DATE	DESCRIPTION
1	2011/06/21	INITIAL RELEASE
A	2011/06/29	UPDATED THE CAGE TOP TO INCLUDE HOLES FOR LIGHTPIPES.
B	2012/03/20	REVISED NOTES; HANGED HEATSINK HEIGHT FROM 8.63 TO 6.5; TABULARIZED PCI, SAN, AND NETWORKING; ADDED HEATSINK HEIGHT WITH MODULE INSERTED [SHT1]. MOVED EXPLODED VIEW TO SHT2. CHANGED OTHER SHEET NUMBER ACCORDINGLY. REMOVED NOTE 6 AND MOVED TO SHEET 2.
C	2012/07/31	HIDE HEATSINK CLIP FROM TOP VIEW, CHANGED DIM 49.0 TO 49.3 AND ADDED "SEE TABLE ON SHEET 2" TO ANNOTATION ON VIEW BOTTOM 3, ADDED MODEL NOTATION IN TOP CORNER ON SHEET 1, ADDED KAPTON TAPE MODEL TO EXPLODED VIEW ON SHEET 2, EXPANDED P/N TABLE ON SHEET 2 TO INCLUDE HEAT SINK DIMS AND KAPTON TAPE OPTIONS, REMOVED DIM 'B' FROM SHEET 2, REWORDED ANNOTATIONS FOR CORRECT ORIENTATION ON SHEET 5.
D	2012/08/31	REMOVED HEATSINKS AND CLIPS FROM ALL VIEWS ON SHEET 1; SEPERATED HEATSINKS TO SEPERATE VIEWS ON SHEET 2 AND REMOVED P/N FROM TABLES; ADDED NEW SHEET 3 WITH VIEWS AND P/N TABLES FOR NO HEATSINK, AND PINFIELD OR LATERAL FIN HEATSINKS; MOVED DIM "0.23 TYP" ON SHEET 6. ADDED ISO VIEWS AND PART NUMBER TABLES FOR WIDE GAP HEATSINKS TO SHEET 2 AND SHEET 3. ADDED TOP VIEWS OF SINGLE AND BELLY TO BELLY PCB TO SHEET SIX TO SHOW POLYIMIDE COVERAGE AND DIMENSIONS.
E	2013/02/20	1. CHANGED BASE CAGE VIEWS ON SHEET 1 FROM 111112-0432 TO 747540420. ADDED TYP TO DIMENSION 3.05 REF ON SIDE VIEW. MOVED DIMENSIONS "10.85 REF" TO F14, "14.0 ±0.1" TO D17, "56.75 REF" TO F17, "58.65 REF" TO G17. ADDED DIMENSION "9.98 REF" @E7. CHANGED DIMENSION 49.03 TO 49.0 @ J14. ADDED BACK VIEW, @E3. REMOVED BELLY ISO VIEW AND ROTATED TOP ISO VIEW & MOVED TO J7. MOVED PCB MIN THICKNESS FROM NOTE 2 TO RESPECTIVE PCB LAYOUT SHEETS. REMOVED INSERTION FORCE FROM NOTE 2. ADDED APPLICATION NOTE @H10. UPDATED P/N DATE CODE PRINTING CALLOUT ON SIDE VIEW. UPDATED 3D MODEL P/N @M20. ADDED EMI SPRING FINGERS NOTE @H8. (SHEET 1) 2. MOVED POLYIMIDE BELLY ISO VIEW TO E9 AND ADDED REAR LEG & UNDER BELLY SPRING FINGER IDENTIFIERS. ADDED UNDERBELLY GASKET ISO VIEW @E3. ADDED TOP VIEW, @ J17. REMOVED CAGES FROM HEATSINK VIEWS. ADDED REAR LEG OPTIONS, @B16. ADDED TITLE FOR TABLES THAT READS OVERALL HEATSINK HEIGHT. ADDED POLYMIDE INSULATOR & # OF REAR LEGS PER PORT COLUMNS TO TABLES. (SHEET 2) 3. ADDED PN'S 747500420, -0422, -0423 & 1111110420 AND UPDATED TABLES, ADDING ISO VIEWS @F18 & F13. ADDED P/N NOTE FOR EACH CAGE SHOWN. (SHEET 3 4. ADDED NOTE 5, (SHEET 4 & 5). REMOVED UNNECESSARY CAGE TO PCB CONTACT PADS FROM BELLY TO BELLY LAYOUT. ADDED TYP TO ALL DIMENSIONS (SHEET 4 & 5). ADDED DIAMETER DIMENSION 0.95±0.05 X4 WITH NOTES "SHOWN AS..." (SHEET 4). FIXED BOX TO NOT INCLUDE TYP. ADDED HOLES @E17, @E15, @E13, & E11 (SHEET 4). REMOVED PAD @F13 (SHEET 5). 5. REMOVED BELLY TO BELLY VIEW AND CENTERED & INCREASED SCALE OF SINGLE SIDED VIEW. (SHEET 6) 6. REMOVED "SEE NOTE 1" FROM DIMENSION "10.4 ±0.1", @E12 & D12. ADDED "SEE NOTE 1" BEZEL OPENING PITCH, @E12. ADDED CENTER LINES TO BEZEL OPENINGS. REMOVED CUTAWAY 7 & 8 FROM SIDE VIEWS. RENAMED CUTAWAY2 TO 1 AND 4 TO 2. REMOVED "SIZE, AND" FROM NOTE 1. ADDED DIMENSION 12.44 REF TYP TO BOTH SIDE VIEWS. REMOVED DIMENSION 9.98 TYP @E4 & J4. (SHEET 7)
F	2013/09/06	ADDED PN'S 747540426. (SHEET 3)
G	2013/10/14	1. CHANGED THE WORD "WILL" TO "MAY" ON NOTE 4. MOVED DATE CODE FROM SIDE OF CAGE TO BACK OF CAGE, ADDED NOTE AT E5 TO LIST THE SERIES NUMBERS THAT WILL HAVE THE DATE CODE INTHIS LOCATION. ADDED 0.70 MAX(BENDING TAB TO BOTTOM SURFACE OF BASE) AT E13. (SHEET 1) 2. REMOVED zSFP+ CAGE VIEW FROM SHEET AT E5, ADDED SIDE VIEW OF CAGE TO SHOW WHERE THE DATE CODE WILL BE ON ALL 111112 SERIES CAGES. (SHEET 2) 3. ADDED NEW SHEET 3 WITH GEN 1 AND GEN 2 zSFP+ OPTIONS. THE PREVIOUS SHEETS FROM SHEET 3 TO SHEET 8 ALL INCREASE BY 1 NUMBER. 4. ADDED P/N 747540427 TO TABLE AT D20 AND ADDED ISO VIEW AND TABLE FOR 1001140420 AT E3 ON SHEET 4.

SYMBOLS		
= 0	DIMENSION UNITS: mm	SCALE: 1:1
= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	
= 0	ANGULAR TOL	± 1.0 °
= 0	4 PLACES	±
= 0	3 PLACES	±
= 0	2 PLACES	± 0.15
= 0	1 PLACE	± 0.25
= 0	0 PLACES	±
= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC: SEE REVISION TABLE

EC NO:	610317	
DRWN:	SMALLESHAPPA	2019/01/09
CHK'D:	VK10	2019/01/11
APPR:	RCHEN08	2019/01/15

INITIAL REVISION:

DRWN:	VK10	2016/06/02
APPR:	RCHEN08	2016/08/04

molex

SFP+ 1X4 SF CAGE 3.05 MM
PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1111122420	PSD	ASY	M

THIRD ANGLE PROJECTION	DRAWING	SERIES	MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
	C-SIZE	111112	SEE SHEET 3		7 OF 8

DOCUMENT STATUS	P1	RELEASE DATE	2019/01/15 04:22:10

REV	DATE	DESCRIPTION
H	2014/09/24	1. ADDED 74754-0426 PLATING SPEC. [SHEET 4] 2. ADDED P/N 74754-0464. [SHEET 4]
I	2015/08/26	1. SHEET 3 : ADDED NOTE 2 2. SHEET 2: J13 : ADDED NEW VERTICAL FIN HEATSINK ISO VIEW 3. SHEET 4: H10 : ADDED (*) FOR LOW COST IN NOTE 4. SHEET 4: I10 : ADDED PART NO. 111112-5421 ON P/N TABLE 5. SHEET 5: K18 : ADDED PART NO. 111112-6421 ISOVIEW 6. SHEET 6: G20 : CHANGED ∅1.05+/-0.05 X14 TO ∅14X 1.05+/-0.05 7. SHEET 6: D19 : CHANGED ∅0.95+/-0.05 X20 TO ∅20X 0.95+/-0.05 8. SHEET 6: D14 : CHANGED ∅0.95+/-0.05 X4 TO ∅4X 0.95+/-0.05 9 SHEET 7: G18 : CHANGED ∅1.05+/-0.05 X28 TO ∅28X 1.05+/-0.05 10.SHEET 7: C16 : CHANGED ∅0.95+/-0.05 X28 TO ∅28X 0.95+/-0.05 11.SHEET 9: ADDED NOTE 2 MODIFIED PCB LAYOUT PER SFF-8433 12.SHEET 6: G20 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 C19 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 C14 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 13.SHEET 7 :F18 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 C16 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1
J	2016/02/02	1. SHEET 3 & 4: REMOVE 1111110420
K	2016/03/25	SHEET 4: H19: ADDED 1111120494 IN P/N TABLE
L	2016/06/30	REMASTERED FROM SD-111112-2420 REV_K TO 1111122420 PSD ASY REV_L SEPERATED 1001140420 TO 1001140420 PSD ASY
M	2019/01/09	SHEET 2: D7: SHOWED POLYIMIDE INSULATOR IN THE VIEW. SHEET 1: B3: REMOVED 111111 SERIES FROM DATE CODE NOTE

SYMBOLS	DIMENSION UNITS: mm	SCALE: 1:1
= 0	GENERAL TOLERANCES (UNLESS SPECIFIED)	
= 0	ANGULAR TOL ±	1.0 °
= 0	4 PLACES ±	
= 0	3 PLACES ±	
= 0	2 PLACES ±	0.15
= 0	1 PLACE ±	0.25
= 0	0 PLACES ±	
= 0	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

CURRENT REV DESC: SEE REVISION TABLE

EC NO: 610317
DRWN: SMALLESHAPPA 2019/01/09
CHK'D: VK10 2019/01/11
APPR: RCHEN08 2019/01/15

INITIAL REVISION:
DRWN: VK10 2016/06/02
APPR: RCHEN08 2016/08/04

THIRD ANGLE PROJECTION | DRAWING: C-SIZE | SERIES: 111112

molex

SFP+ 1X4 SF CAGE 3.05 MM
PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

PRODUCT CUSTOMER DRAWING

DOCUMENT NUMBER	DOC TYPE	DOC PART	REVISION
1111122420	PSD	ASY	M

MATERIAL NUMBER	CUSTOMER	SHEET NUMBER
SEE SHEET 3		8 OF 8

DOCUMENT STATUS	P1	RELEASE DATE	2019/01/15 04:22:10

FORMAT: master-tb-prod-C REVISION: H DATE: 2018/01/18

3D MODEL: TM-111112-2420

BASE CAGE DETAILS

(APPLIES TO ALL CAGES IN THIS DRAWING)

747540420

SHOWN

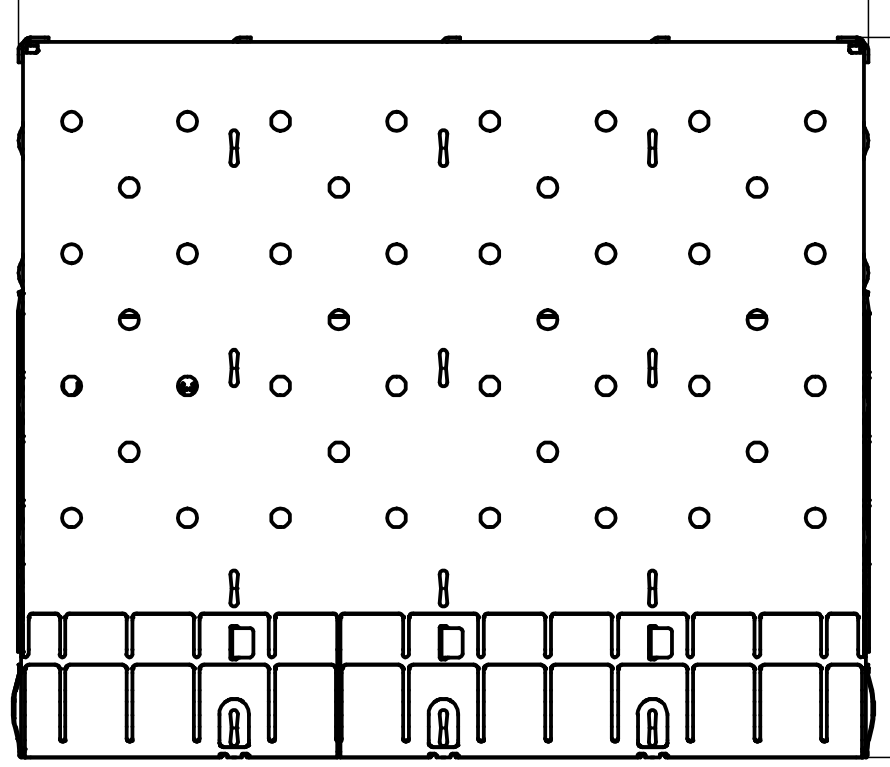

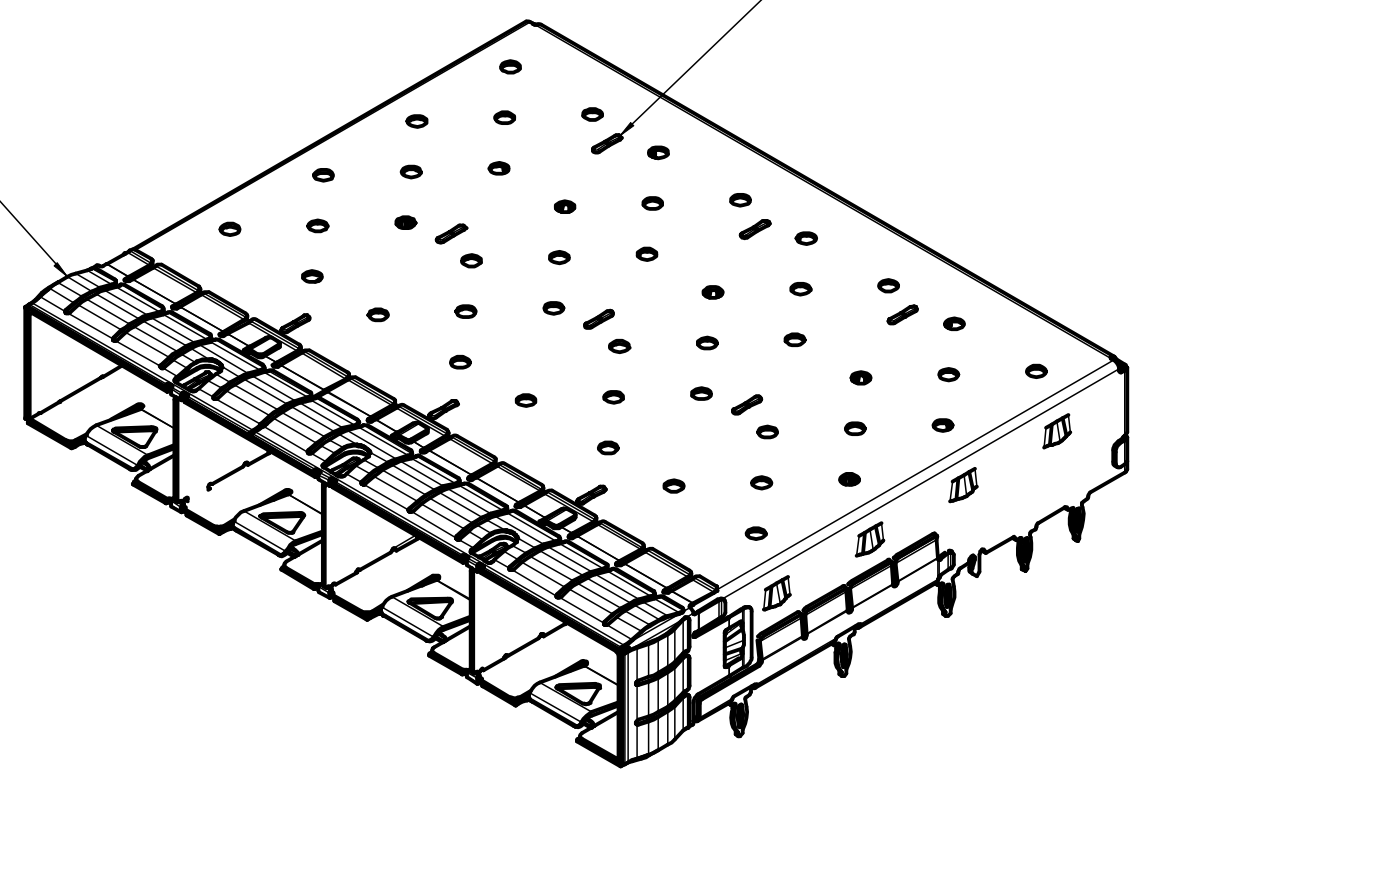







PART NO. AND WEEK/YEAR DATE CODE TO BE PRINTED ON THE SIDE OF COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN ON 74754, 111111 AND 100114 SERIES CAGE ASSEMBLIES

WEEK/YEAR DATE CODE TABLE	
WW	01 THRU 52 OR 53 EXAMPLE: 01 = FIRST WEEK OF YEAR 52 = LAST WEEK OF YEAR
YY	11, 12, 13 ETC. EXAMPLE: YEAR 2013 = 13

NOTES:
1. MATERIAL:
   CAGE: 0.25mm THICK COPPER ALLOY, NICKEL PLATED.
   SPRING FINGERS: 0.10mm THICK COPPER ALLOY, NICKEL PLATED.
   HEATSINK: ALUMINUM, NICKEL PLATED.
   HEATSINK SPRING CLIP: STAINLESS STEEL.
2. PRESS FIT LEGS 3.05mm [.120 INCH] LONG:
3. PORTS ARE DESIGNED FOR SFP+ TRANSCEIVERS AND ARE COMPATIBLE WITH SFP TRANSCEIVERS.
   THE TOP SURFACE OF THE MODULE MUST BE FLAT (NO PRODUCT LABEL RECESS) AND THERMALLY CONDUCTIVE TO FUNCTION OPTIMALLY.
4. WELD SPOT MAY SHOW SLIGHT MATERIAL DISCOLORATION.
5. NO ROHS EXEMPTIONS.
6. CUSTOM HEATSINKS AVAILABLE UPON REQUEST.

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN: ACHENG03 2016/02/04
CH'KD:
APPR: RCHEN08
DESCRIPTION
J
REV

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		
		mm	INCH
=0	4 PLACES	± ---	± ---
=0	3 PLACES	± ---	± ---
=0	2 PLACES	± 0.15	± ---
	1 PLACE	± 0.25	± ---
	0 PLACE	±	±
	ANGULAR ± 1 °		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE: MM ONLY	SCALE: 3:1	DESIGN UNITS: METRIC
DRAWN BY: RMIKLINSKI	DATE: 2011/06/20	THIRD ANGLE PROJECTION
CHECKED BY: MMCKERVEY	DATE: 2011/08/26	
APPROVED BY: KLLOYD	DATE: 2012/08/14	
MATERIAL NO.: SEE SHEET 4	DOCUMENT NO.: SD-111112-2420	SHEET NO.: 1 OF 10
SIZE: D		

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

tb_frame_D_P_AM_T
Rev. G 2012/01/11

CAGE ASSEMBLY OPTIONS

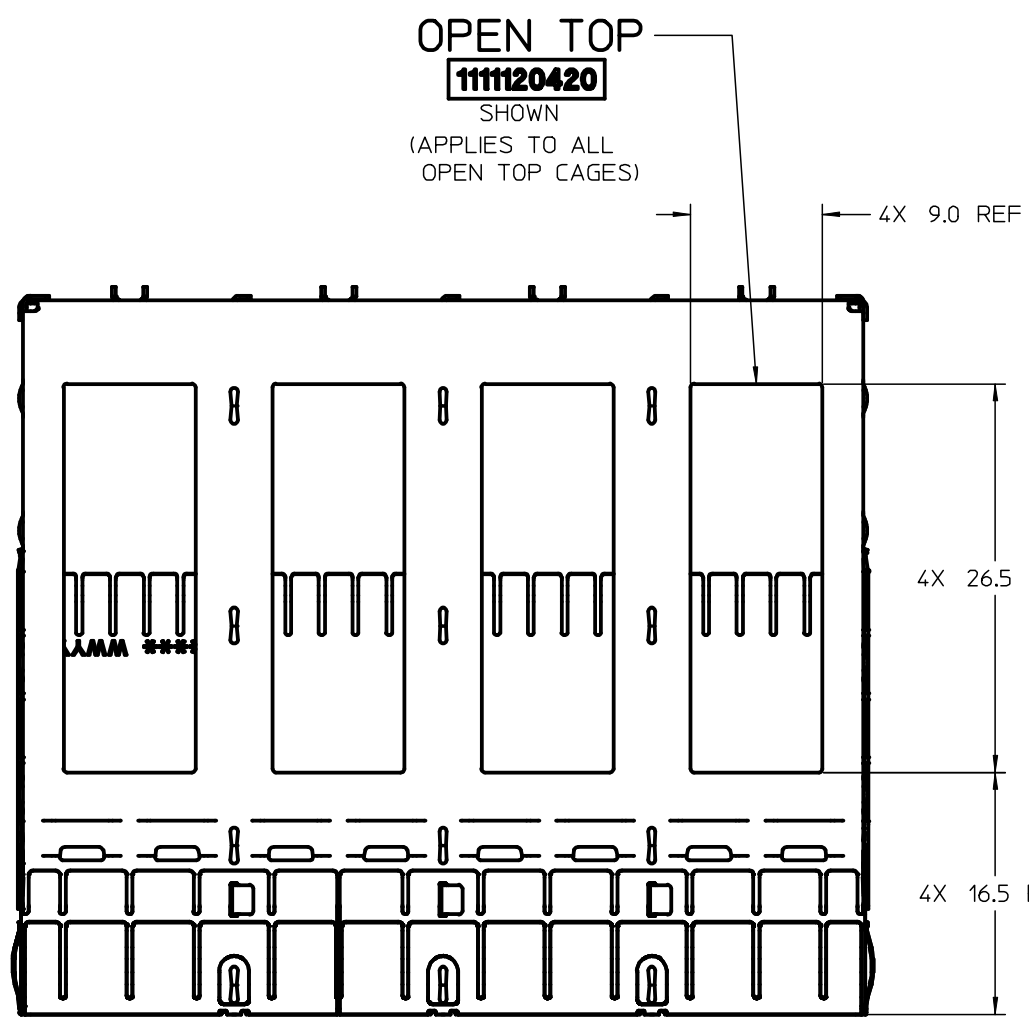



OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
CUSTOM	23.6

HEATSINK OPTIONS



OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
PCI	14.3
SAN	16.6
NETWORKING	23.6

NOTE: PCI - 13 ROWS
SAN - 11 ROWS
NETWORKING - 10 ROWS

HEATSINK OPTIONS



OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
PCI	14.3
SAN	16.6
NETWORKING	23.6

HEATSINK OPTIONS



OVERALL HEATSINK HEIGHT

APPLICATION	DIM 'A'
PCI	14.3
SAN	16.6
NETWORKING	23.6

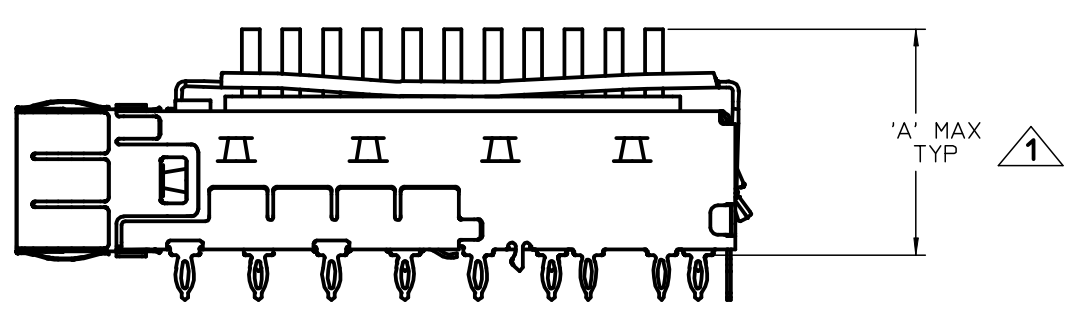

NOTES:
1. HEIGHT OF HEATSINK WITH MODULE INSERTED.
DIMENSION MAY BE LESS DUE TO MODULE AND HEATSINK VARIATIONS.

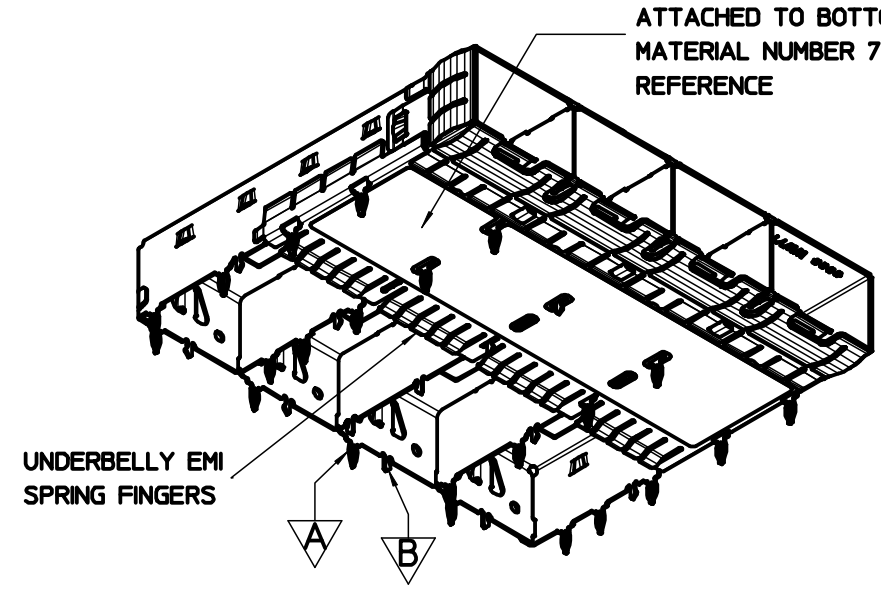



PART NO. AND WEEK/YEAR DATE CODE TO BE PRINTED ON THE SIDE OF COMPLETED CAGE ASSEMBLY APPROXIMATELY AS SHOWN FOR 111112 SERIES CAGE ASSEMBLIES.

WEEK/YEAR DATE CODE TABLE	
WW	01 THRU 52 OR 53 EXAMPLE: 01 = FIRST WEEK OF YEAR 52 = LAST WEEK OF YEAR
YY	11, 12, 13 ETC. EXAMPLE: YEAR 2013 = 13

REAR LEG OPTIONS

(PER PORT)

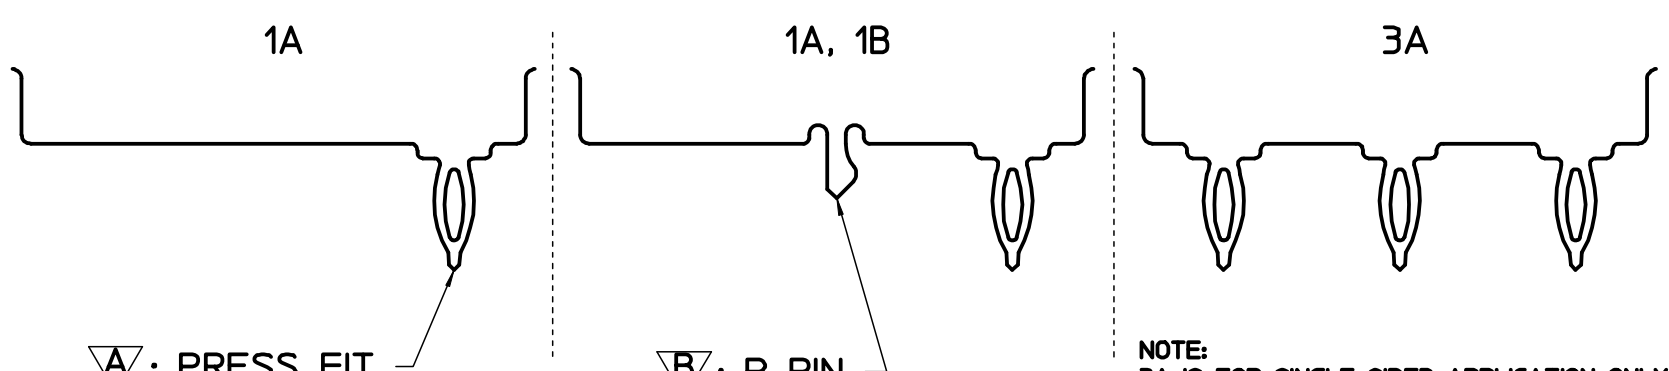

NOTE:
3A IS FOR SINGLE SIDED APPLICATION ONLY

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN:ACHENG03 2016/02/04
CHK'D:
APPR:RCHEN08
REV J

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
=0	4 PLACES	± ---	± ---
=0	3 PLACES	± ---	± ---
=0	2 PLACES	± 0.15	± ---
	1 PLACE	± 0.25	± ---
	0 PLACE	±	±
	ANGULAR ± 1 °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: 3:1	DESIGN UNITS: METRIC
DRAWN BY: RMIKLINSKI	DATE: 2011/06/20	THIRD ANGLE PROJECTION
CHECKED BY: MMCKERVEY	DATE: 2011/08/26	
APPROVED BY: KLLOYD	DATE: 2012/08/14	

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

MATERIAL NO.: SEE SHEET 4
DOCUMENT NO.: SD-111112-2420
SHEET NO.: 2 OF 10
SIZE: D

lb_frame_D_P_AM_T Rev. G 2012/01/11

OPTIONAL GEN 2 UNDER BELLY GASKET

1001140420
SHOWN

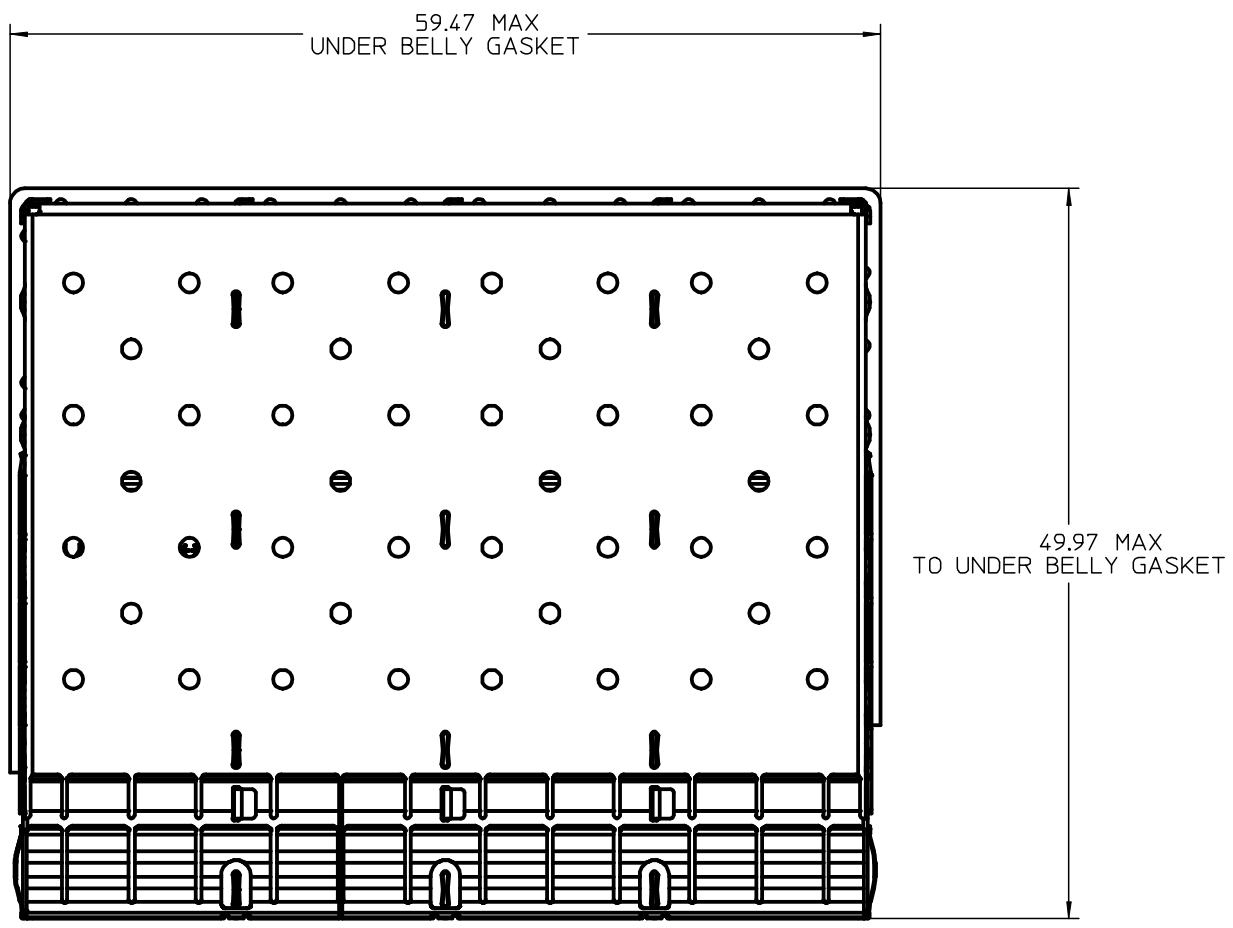



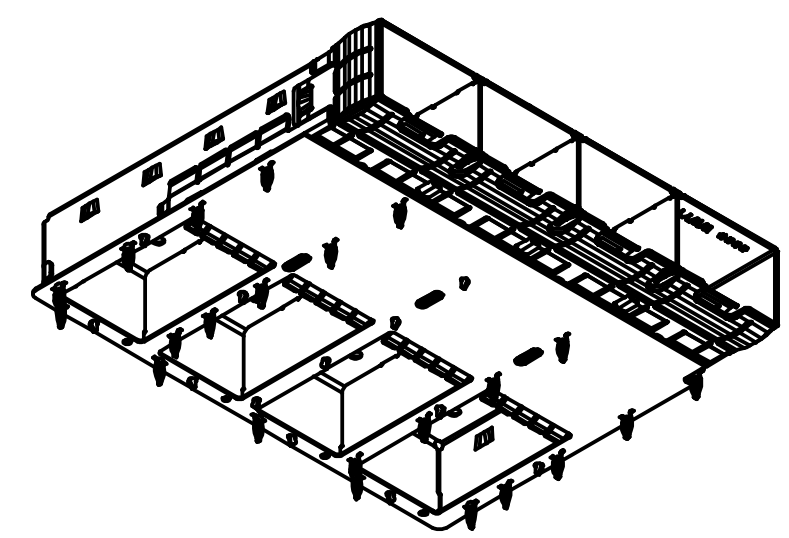

NOTES:

1. OPTIONAL UNDER BELLY GASKET ATTACHED TO BOTTOM OF CAGE (SEE P/N TABLES FOR AVAILABLE ASSEMBLIES).
2. GEN 2 UNDER BELLY GASKET IS UL94 V-0 RATED.

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN:ACHENG03 2016/02/04
CHK'D:
APPR:RCHEN08
DESCRIPTION
J
REV

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
=O	4 PLACES	± ---	± ---
=O	3 PLACES	± ---	± ---
=O	2 PLACES	± 0.15	± ---
	1 PLACE	± 0.25	± ---
	0 PLACE	±	±
	ANGULAR ± 1 °		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	SCALE	DESIGN UNITS	
MM ONLY	3:1	METRIC	THIRD ANGLE PROJECTION

DRAWN BY	DATE
RMIKLINSKI	2011/06/20
CHECKED BY	DATE
MMCKERVEY	2011/08/26
APPROVED BY	DATE
KLLOYD	2012/08/14

TITLE
SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE SHEET 4	SD-111112-2420	3 OF 10

SIZE D

PART NUMBER SELECTION

1111120420
SHOWN

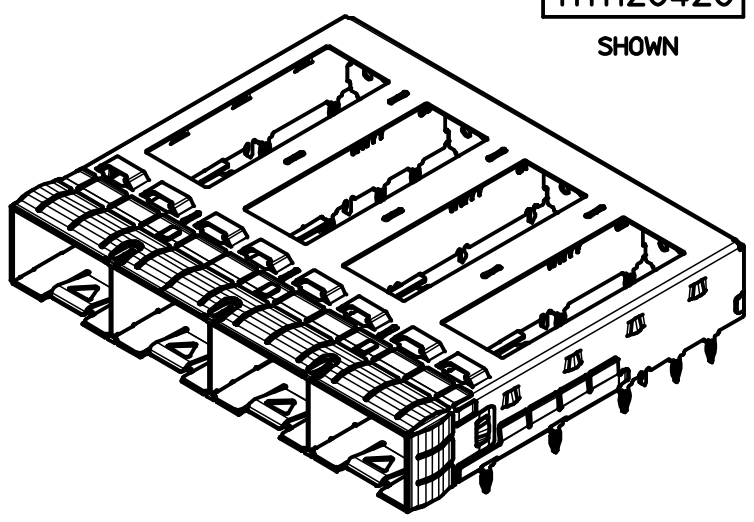

SFP+ OPEN TOP BASE CAGE FOR HEATSINK		
PART NO.	POLYIMIDE INSULATOR	# OF REAR LEGS PER PORT
1111120420	---	1A, 1B
1111120460	YES	1A, 1B

1111122420
SHOWN

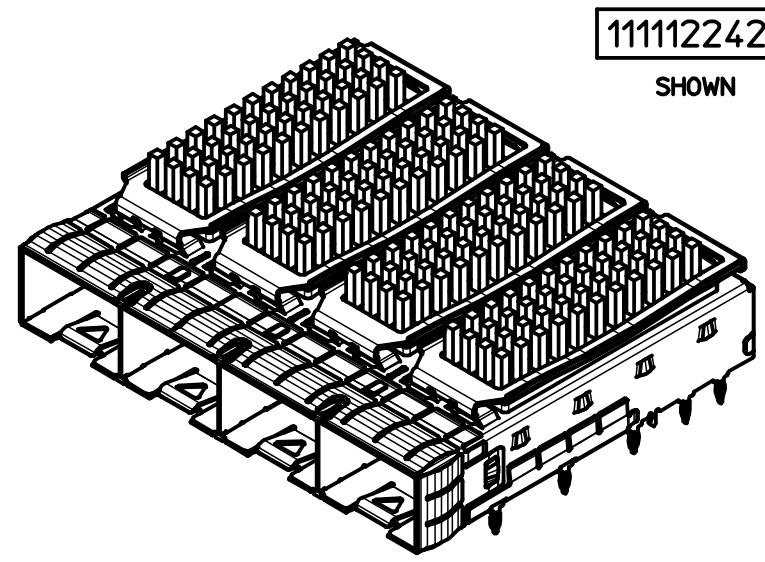

SFP+ PIN FIELD HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEATSINK	# OF REAR LEGS PER PORT
1111121420	---	PCI	1A, 1B
1111121460	YES	PCI	1A, 1B
1111122420	---	SAN	1A, 1B
1111122460	YES	SAN	1A, 1B
1111123420	---	NET	1A, 1B
1111123460	YES	NET	1A, 1B

NOTE: PCI - 13 ROWS
SAN - 11 ROWS
NET - 10 ROWS

1111125420
SHOWN

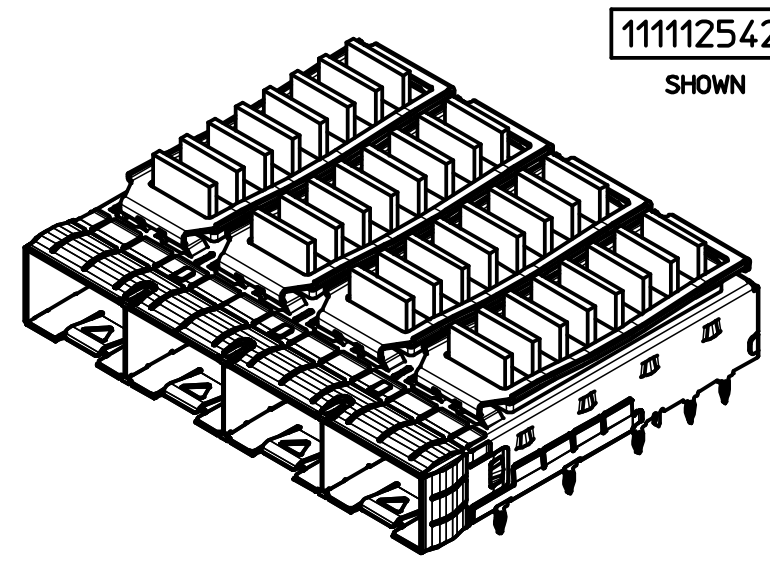

SFP+ LATERAL FIN HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEATSINK	# OF REAR LEGS PER PORT
1111124420	---	PCI	1A, 1B
1111124460	YES	PCI	1A, 1B
1111125420	---	SAN	1A, 1B
1111125421	---	SAN(*)	1A, 1B
1111125460	YES	SAN	1A, 1B
1111126420	---	NET	1A, 1B
1111126460	YES	NET	1A, 1B

NOTE: (*) FOR LOW COST

1111128420
SHOWN

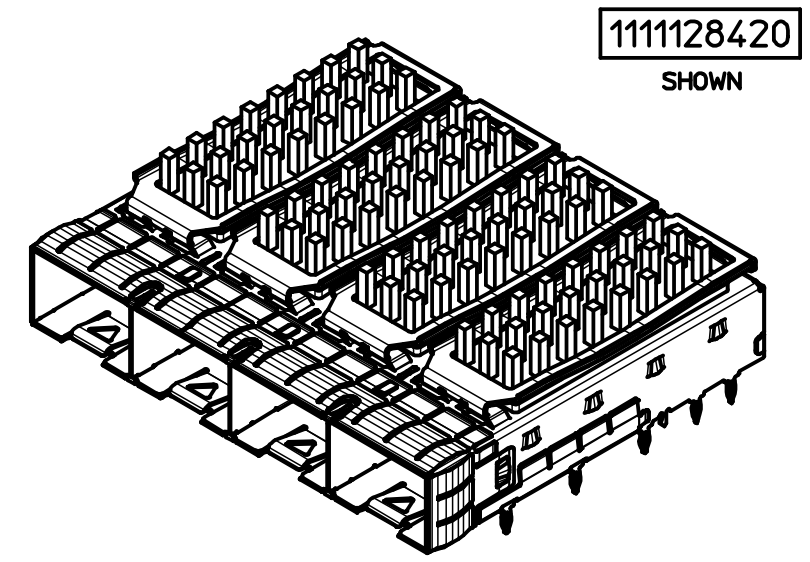

SFP+ WIDE GAP PIN FIELD HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEATSINK	# OF REAR LEGS PER PORT
1111127420	---	PCI	1A, 1B
1111127460	YES	PCI	1A, 1B
1111128420	---	SAN	1A, 1B
1111128460	YES	SAN	1A, 1B
1111129420	---	NET	1A, 1B
1111129460	YES	NET	1A, 1B

747540420
SHOWN

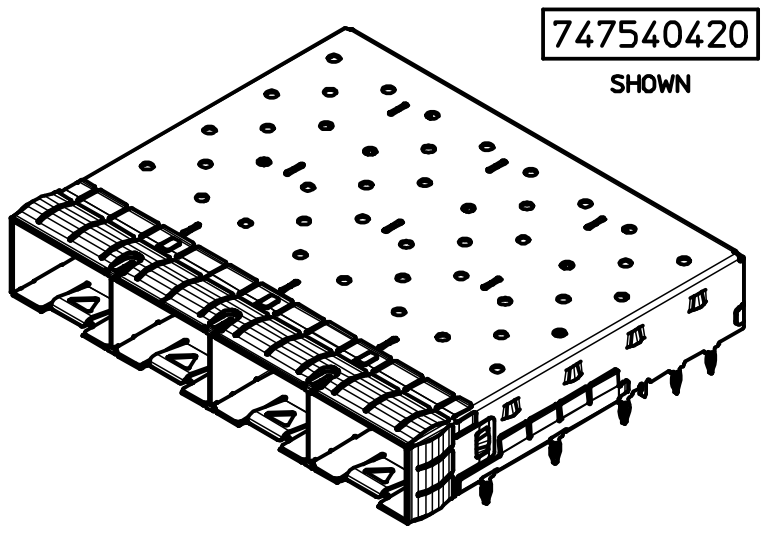

SFP+ CLOSED TOP BASE CAGE				
PART NO.	POLYIMIDE INSULATOR	WELD POINT QUANTITY	# OF REAR LEGS PER PORT	PLATING
747540420	---	6	1A, 1B	-----
747540422	---	6	3A	-----
747540423	---	19	1A, 1B	-----
747540427	YES	6 (15mm MAX PITCH BETWEEN ANY 2 WELD POINTS)	1A, 1B	-----
747540464	---	6	1A, 1B	OVER ALL: MAT TIN PLATED 2.0µM MIN.

1001140420
SHOWN

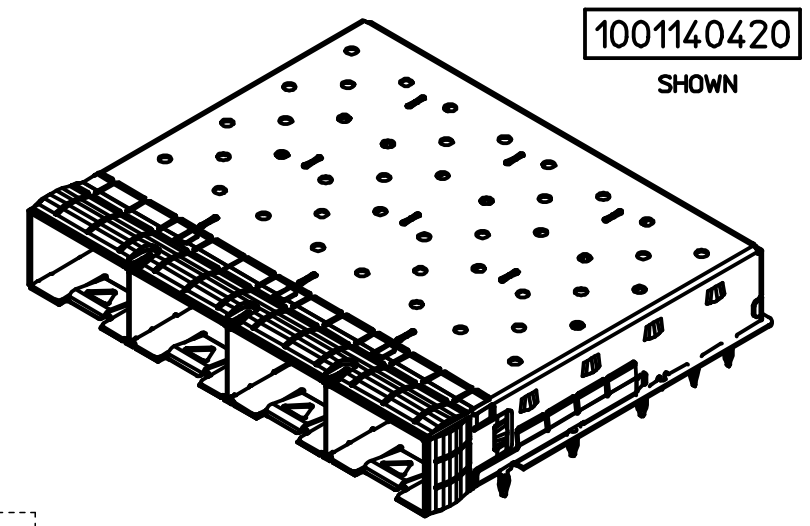

zSFP+ CLOSED TOP BASE CAGE W/ GEN 2 BELLY GASKET	
PART NO.	# OF REAR LEGS PER PORT
1001140420	1A, 1B

747540426
SHOWN

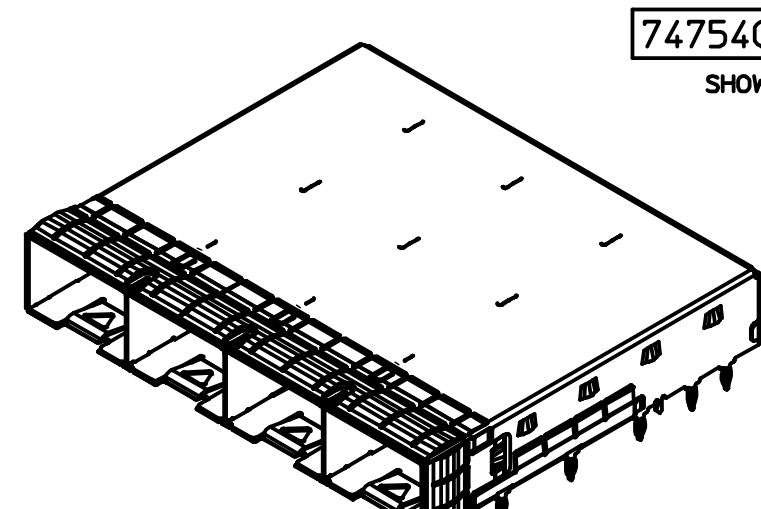

SFP+ CLOSED TOP BASE CAGE			
PART NO.	WELD POINT QUANTITY	# OF REAR LEGS PER PORT	PLATING
747540426	6 (15mm MAX PITCH BETWEEN ANY 2 WELD POINTS)	1A, 1B	OVER ALL: MAT TIN PLATED 2.0µM MIN.

1111126421
SHOWN

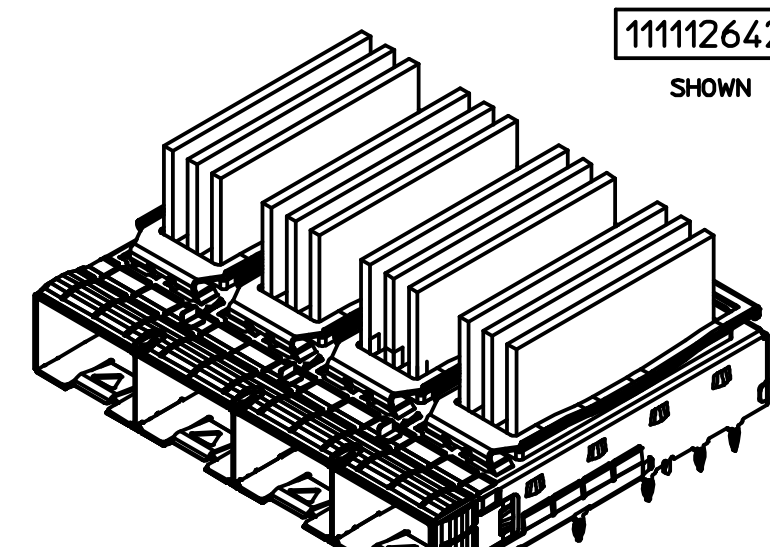

SFP+ CUSTOM FIN HEATSINK OPTION			
PART NO.	POLYIMIDE INSULATOR	HEATSINK	# OF REAR LEGS PER PORT
1111126421	---	CUSTOM	1A, 1B

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN:ACHENG03 2016/02/04
CHK'D:
APPR:RCHEN08
DESCRIPTION
J
REV

QUALITY SYMBOLS
=0
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.15	± ---
1 PLACE	± 0.25	± ---
0 PLACE	±	±

ANGULAR ± 1 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 2:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: RMIKLINSKI DATE: 2011/06/20
CHECKED BY: MMCKERVEY DATE: 2011/08/26
APPROVED BY: KLLOYD DATE: 2012/08/14
MATERIAL NO.: SEE TABLE

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

DOCUMENT NO.: SD-111112-2420
SHEET NO.: 4 OF 10
SIZE: D

PCB LAYOUT FOR SINGLE SIDE MOUNT

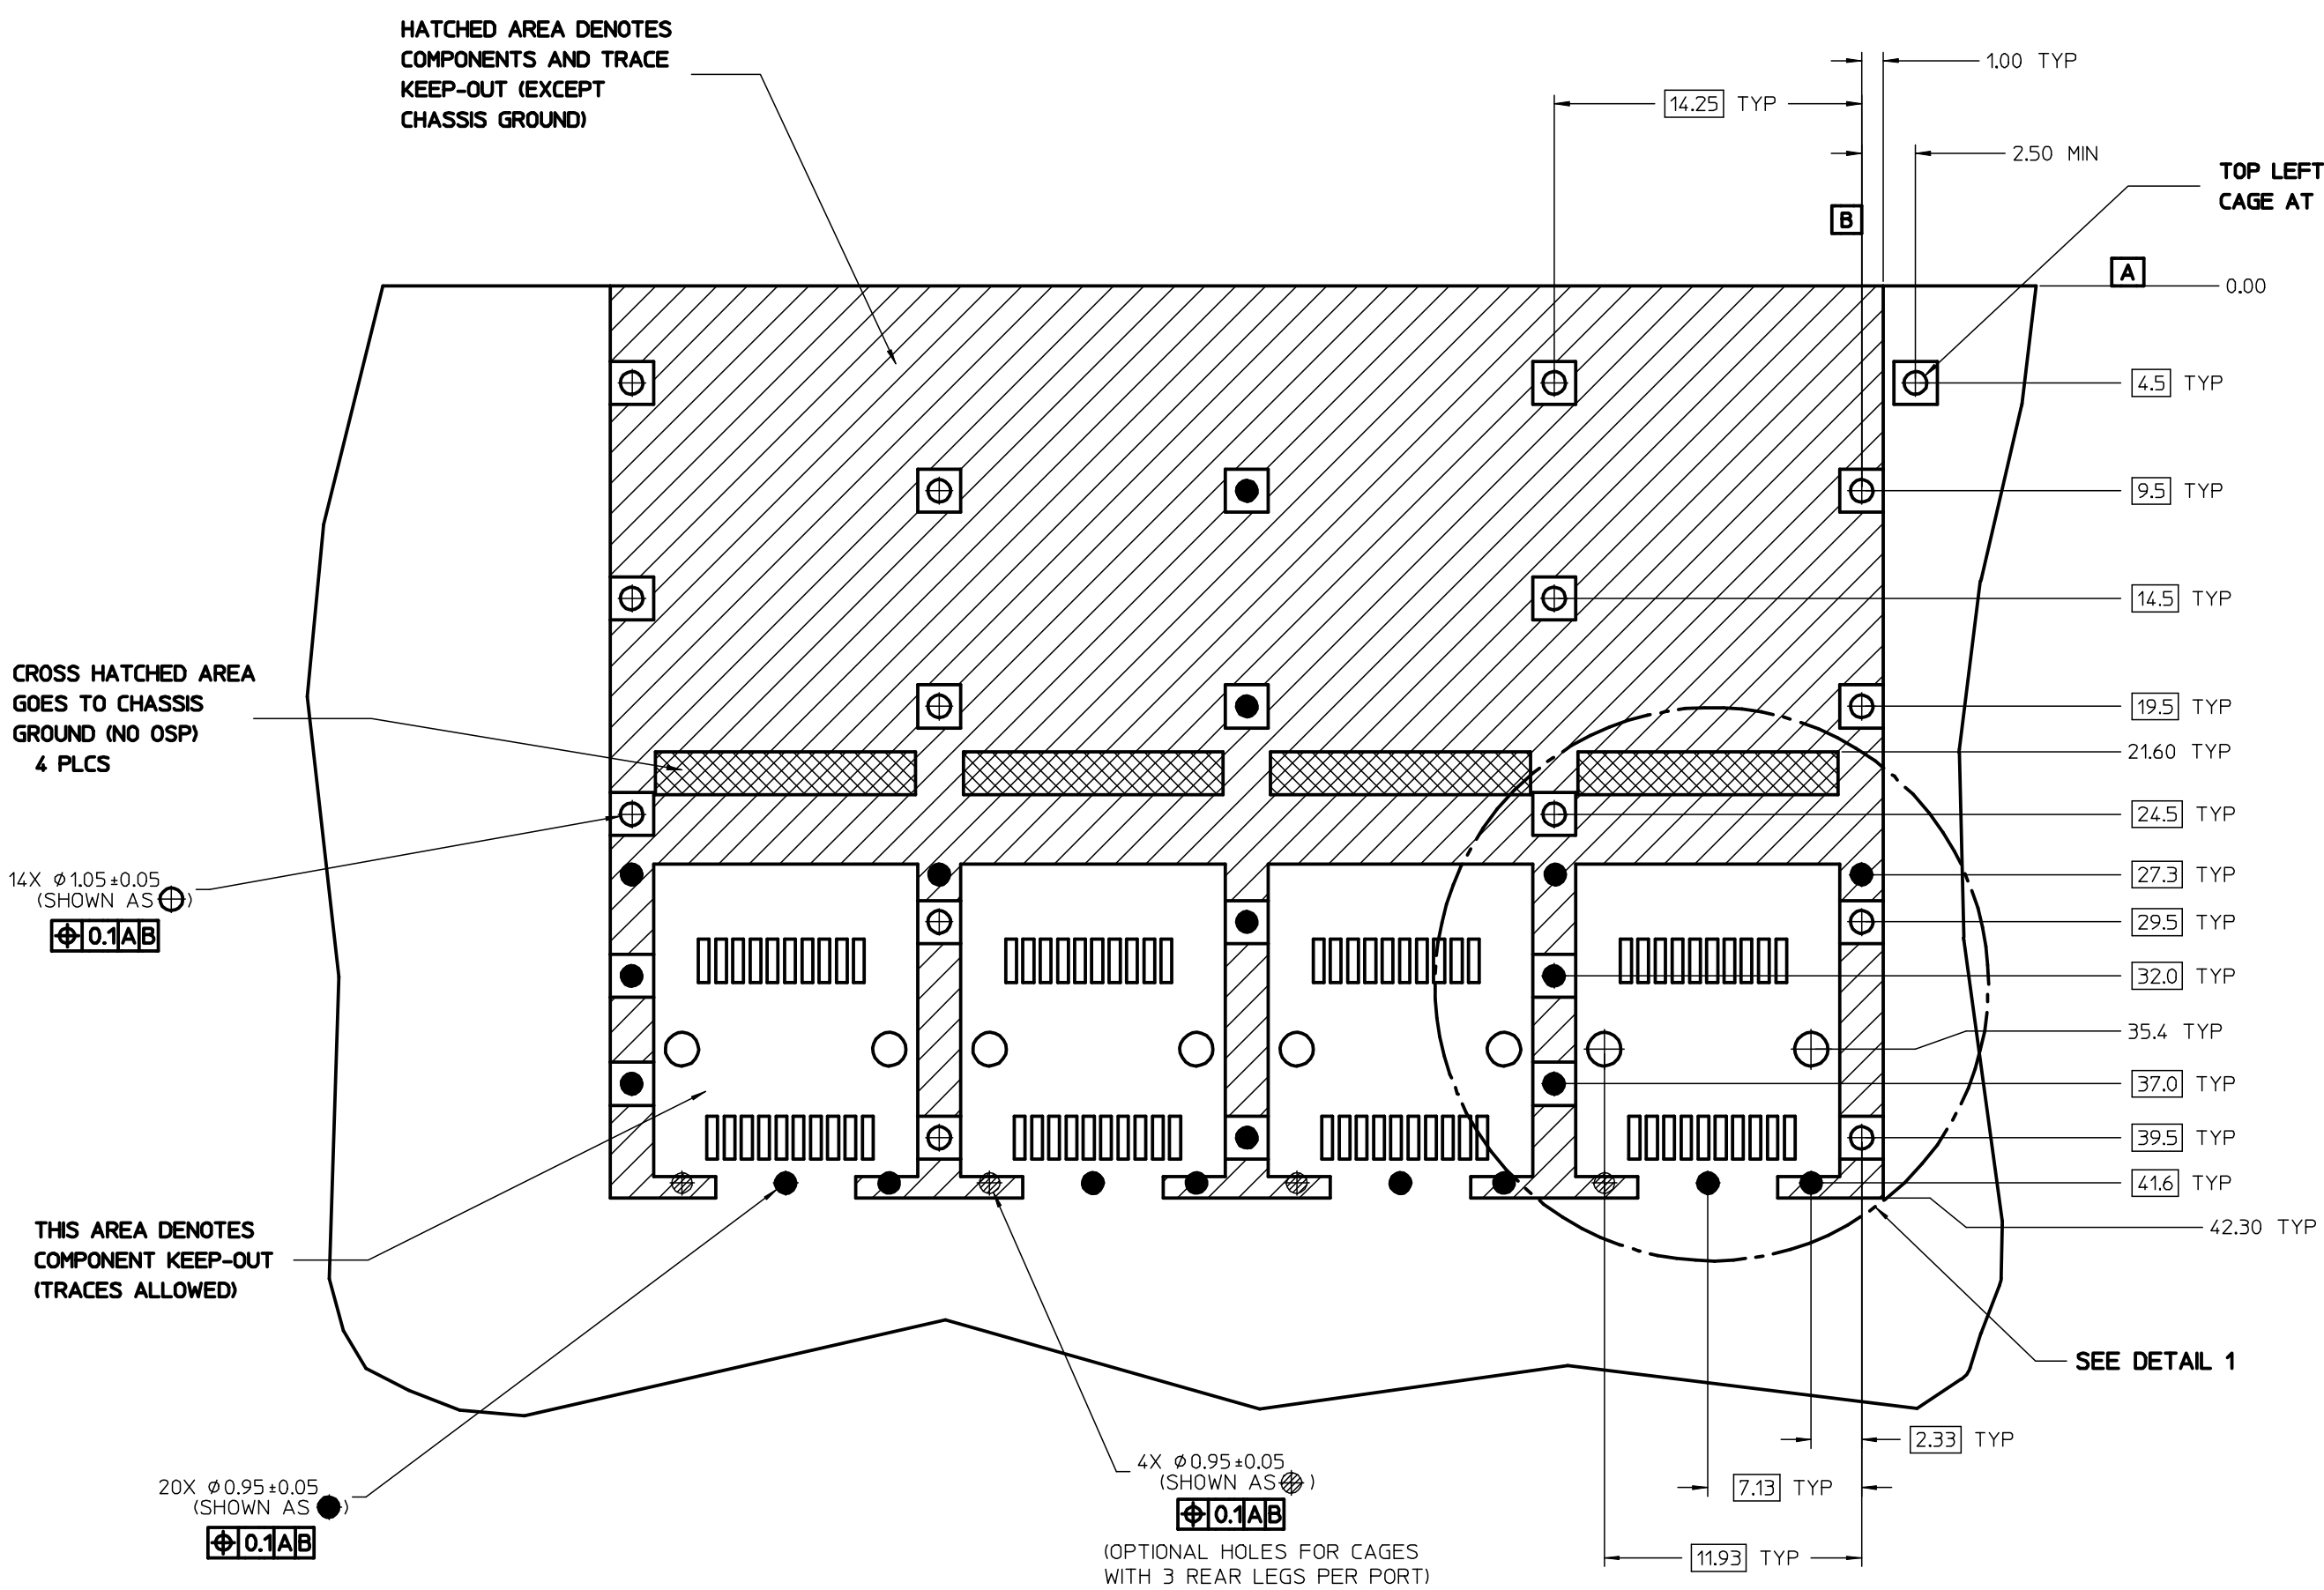

HOST CONNECTOR DETAIL

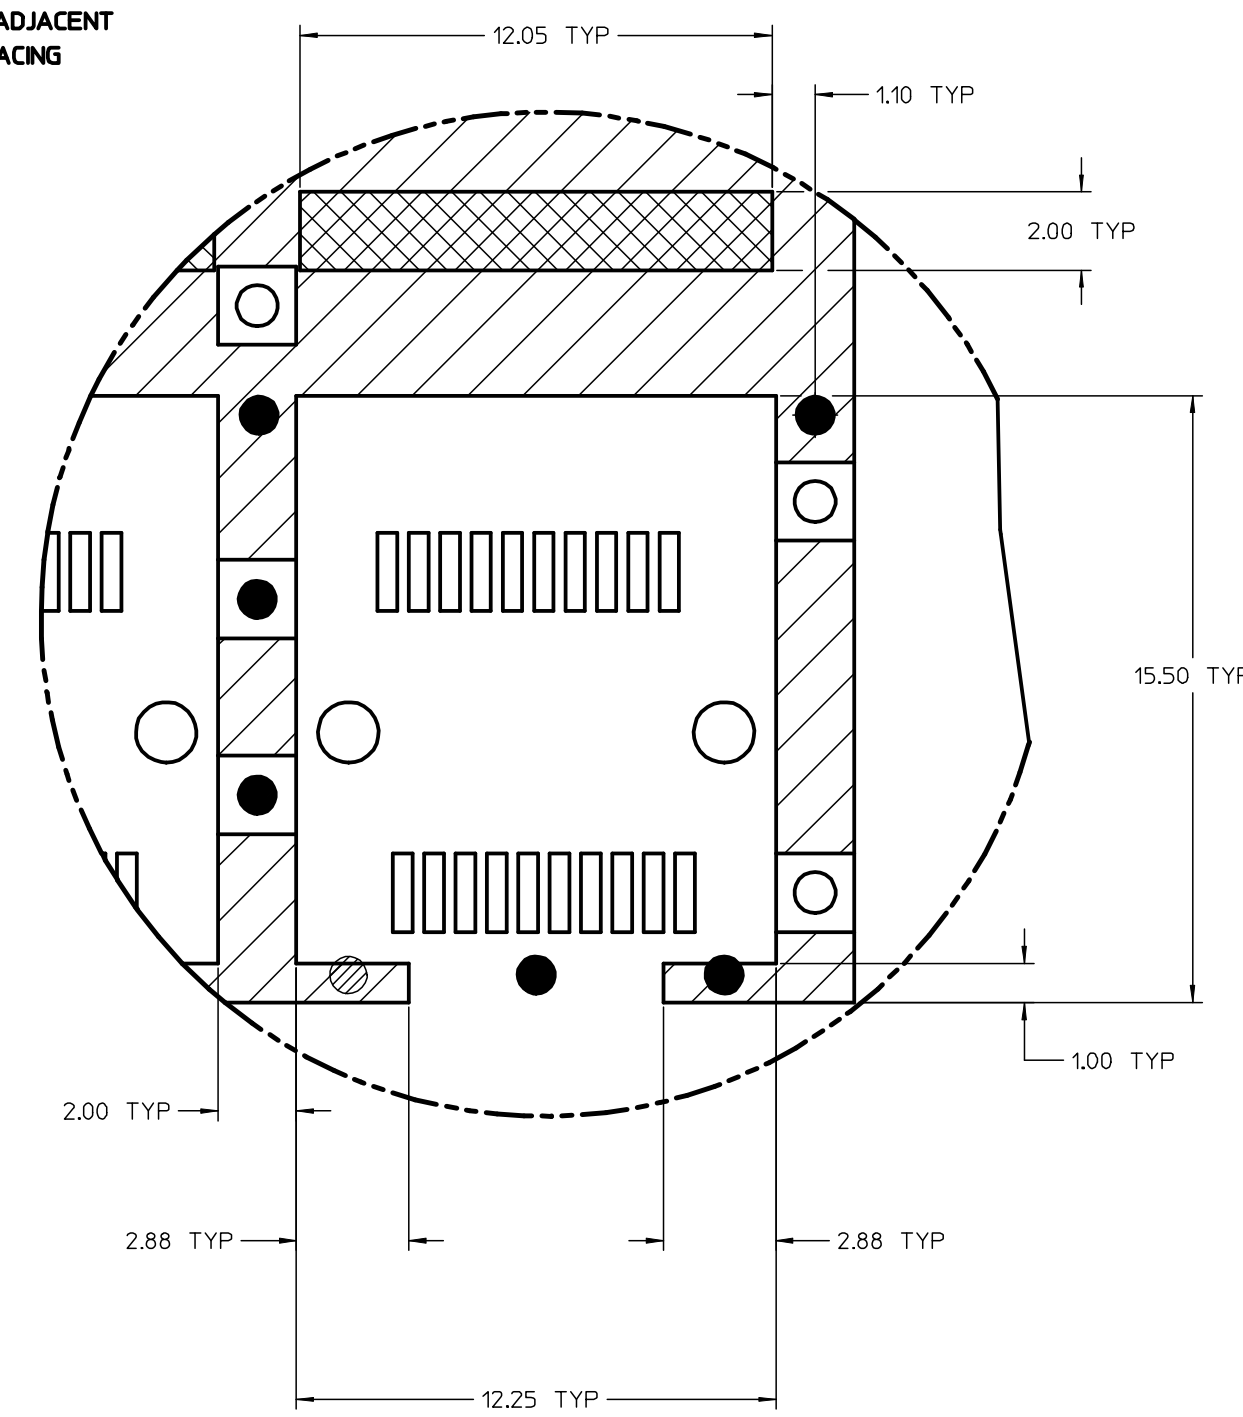

DETAIL 1
SCALE 8:1

NOTES:
1. PADS AND VIAS CONNECT TO CHASSIS GROUND (RECOMMENDED PADS TO BE 2.00mm SQUARE)
2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
3. CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT
4. HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25mm
5. MINIMUM PCB THICKNESS FOR SINGLE SIDED USE 1.57mm [0.062"].

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN:ACHENG03
CHK'D:
APPR:RCHEN08 2016/02/04
DESCRIPTION
J
REV

QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.15	± ---
1 PLACE	± 0.25	± ---
0 PLACE	±	±

ANGULAR ± 1 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM ONLY
SCALE	5:1
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY / DATE	RMIKLINSKI 2011/06/20
CHECKED BY / DATE	MMCKERVEY 2011/08/26
APPROVED BY / DATE	KLLOYD 2012/08/14
MATERIAL NO.	SEE SHEET 4
TITLE	SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS
DOCUMENT NO.	SD-111112-2420
SHEET NO.	5 OF 10
SIZE	D

PCB LAYOUT FOR BELLY TO BELLY MOUNTING

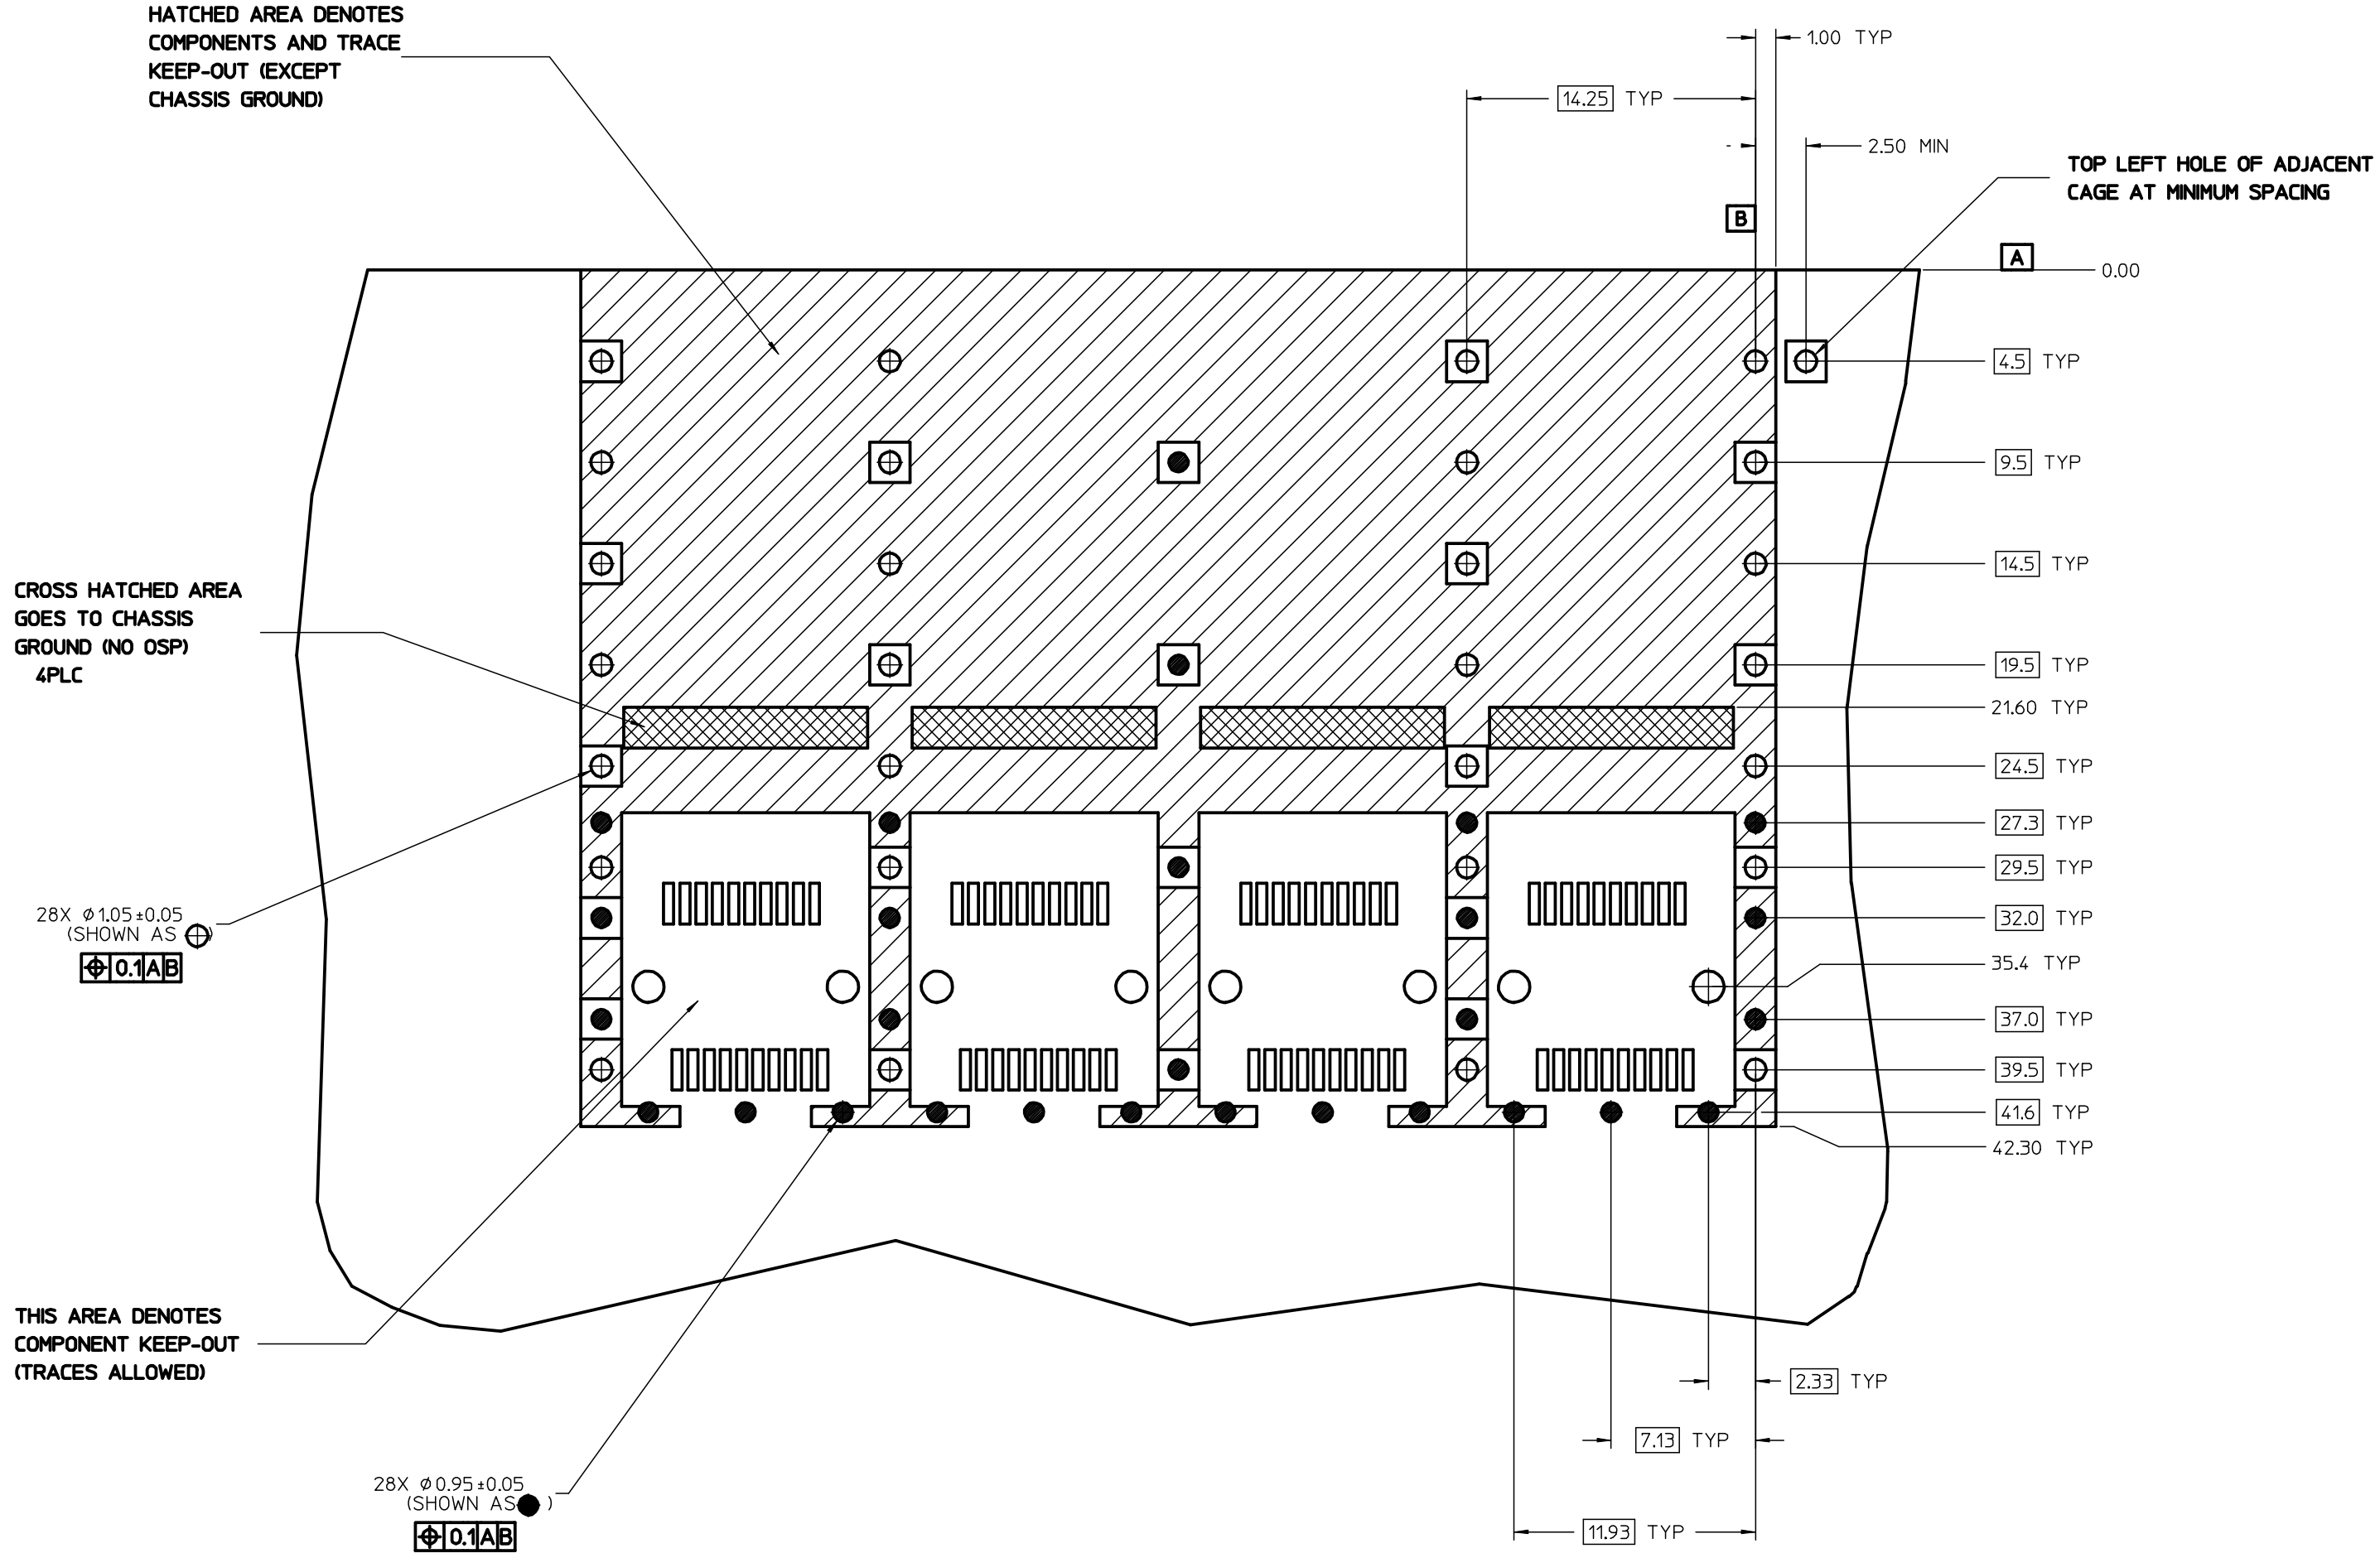

NOTE:
SEE SHEET 5 FOR HOST CONNECTOR DETAIL

NOTES:

1. PADS AND VIAS CONNECT TO CHASSIS GROUND (RECOMMENDED PADS TO BE 2.00mm SQUARE)
2. RECOMMENDED THRU HOLE PLATING INCLUDES HASL, OSP, OR IMMERSION (GOLD, SILVER, OR TIN)
3. CONNECTOR PAD LAYOUT PER SFP+ MSA WILL ACCOMMODATE MOLEX CONNECTOR SERIES 74441 OR EQUIVALENT
4. HOLE PATTERN REPEATS FOR EACH PORT, SPACING BETWEEN PORTS IS 14.25mm
5. MINIMUM PCB THICKNESS FOR BELLY TO BELLY USE 3.00mm [0.118"].

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN:ACHENG03 2016/02/04
CHK'D:
APPR:RCHEN08
J
REV
DESCRIPTION

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		
		mm	INCH
=0	4 PLACES	± ---	± ---
=0	3 PLACES	± ---	± ---
=0	2 PLACES	± 0.15	± ---
	1 PLACE	± 0.25	± ---
	0 PLACE	±	±
	ANGULAR ± 1 °		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE: MM ONLY	SCALE: 5:1	DESIGN UNITS: METRIC
DRAWN BY: RMIKLINSKI	DATE: 2011/06/20	
CHECKED BY: MMCKERVEY	DATE: 2011/08/26	
APPROVED BY: KLLOYD	DATE: 2012/08/14	
MATERIAL NO.: SEE SHEET 4	DOCUMENT NO.: SD-111112-2420	SHEET NO.: 6 OF 10
SIZE: D		

THIRD ANGLE PROJECTION

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

POLYIMIDE INSULATOR COVERAGE AREA
(APPLIES TO SINGLE SIDED AND BELLY TO BELLY)

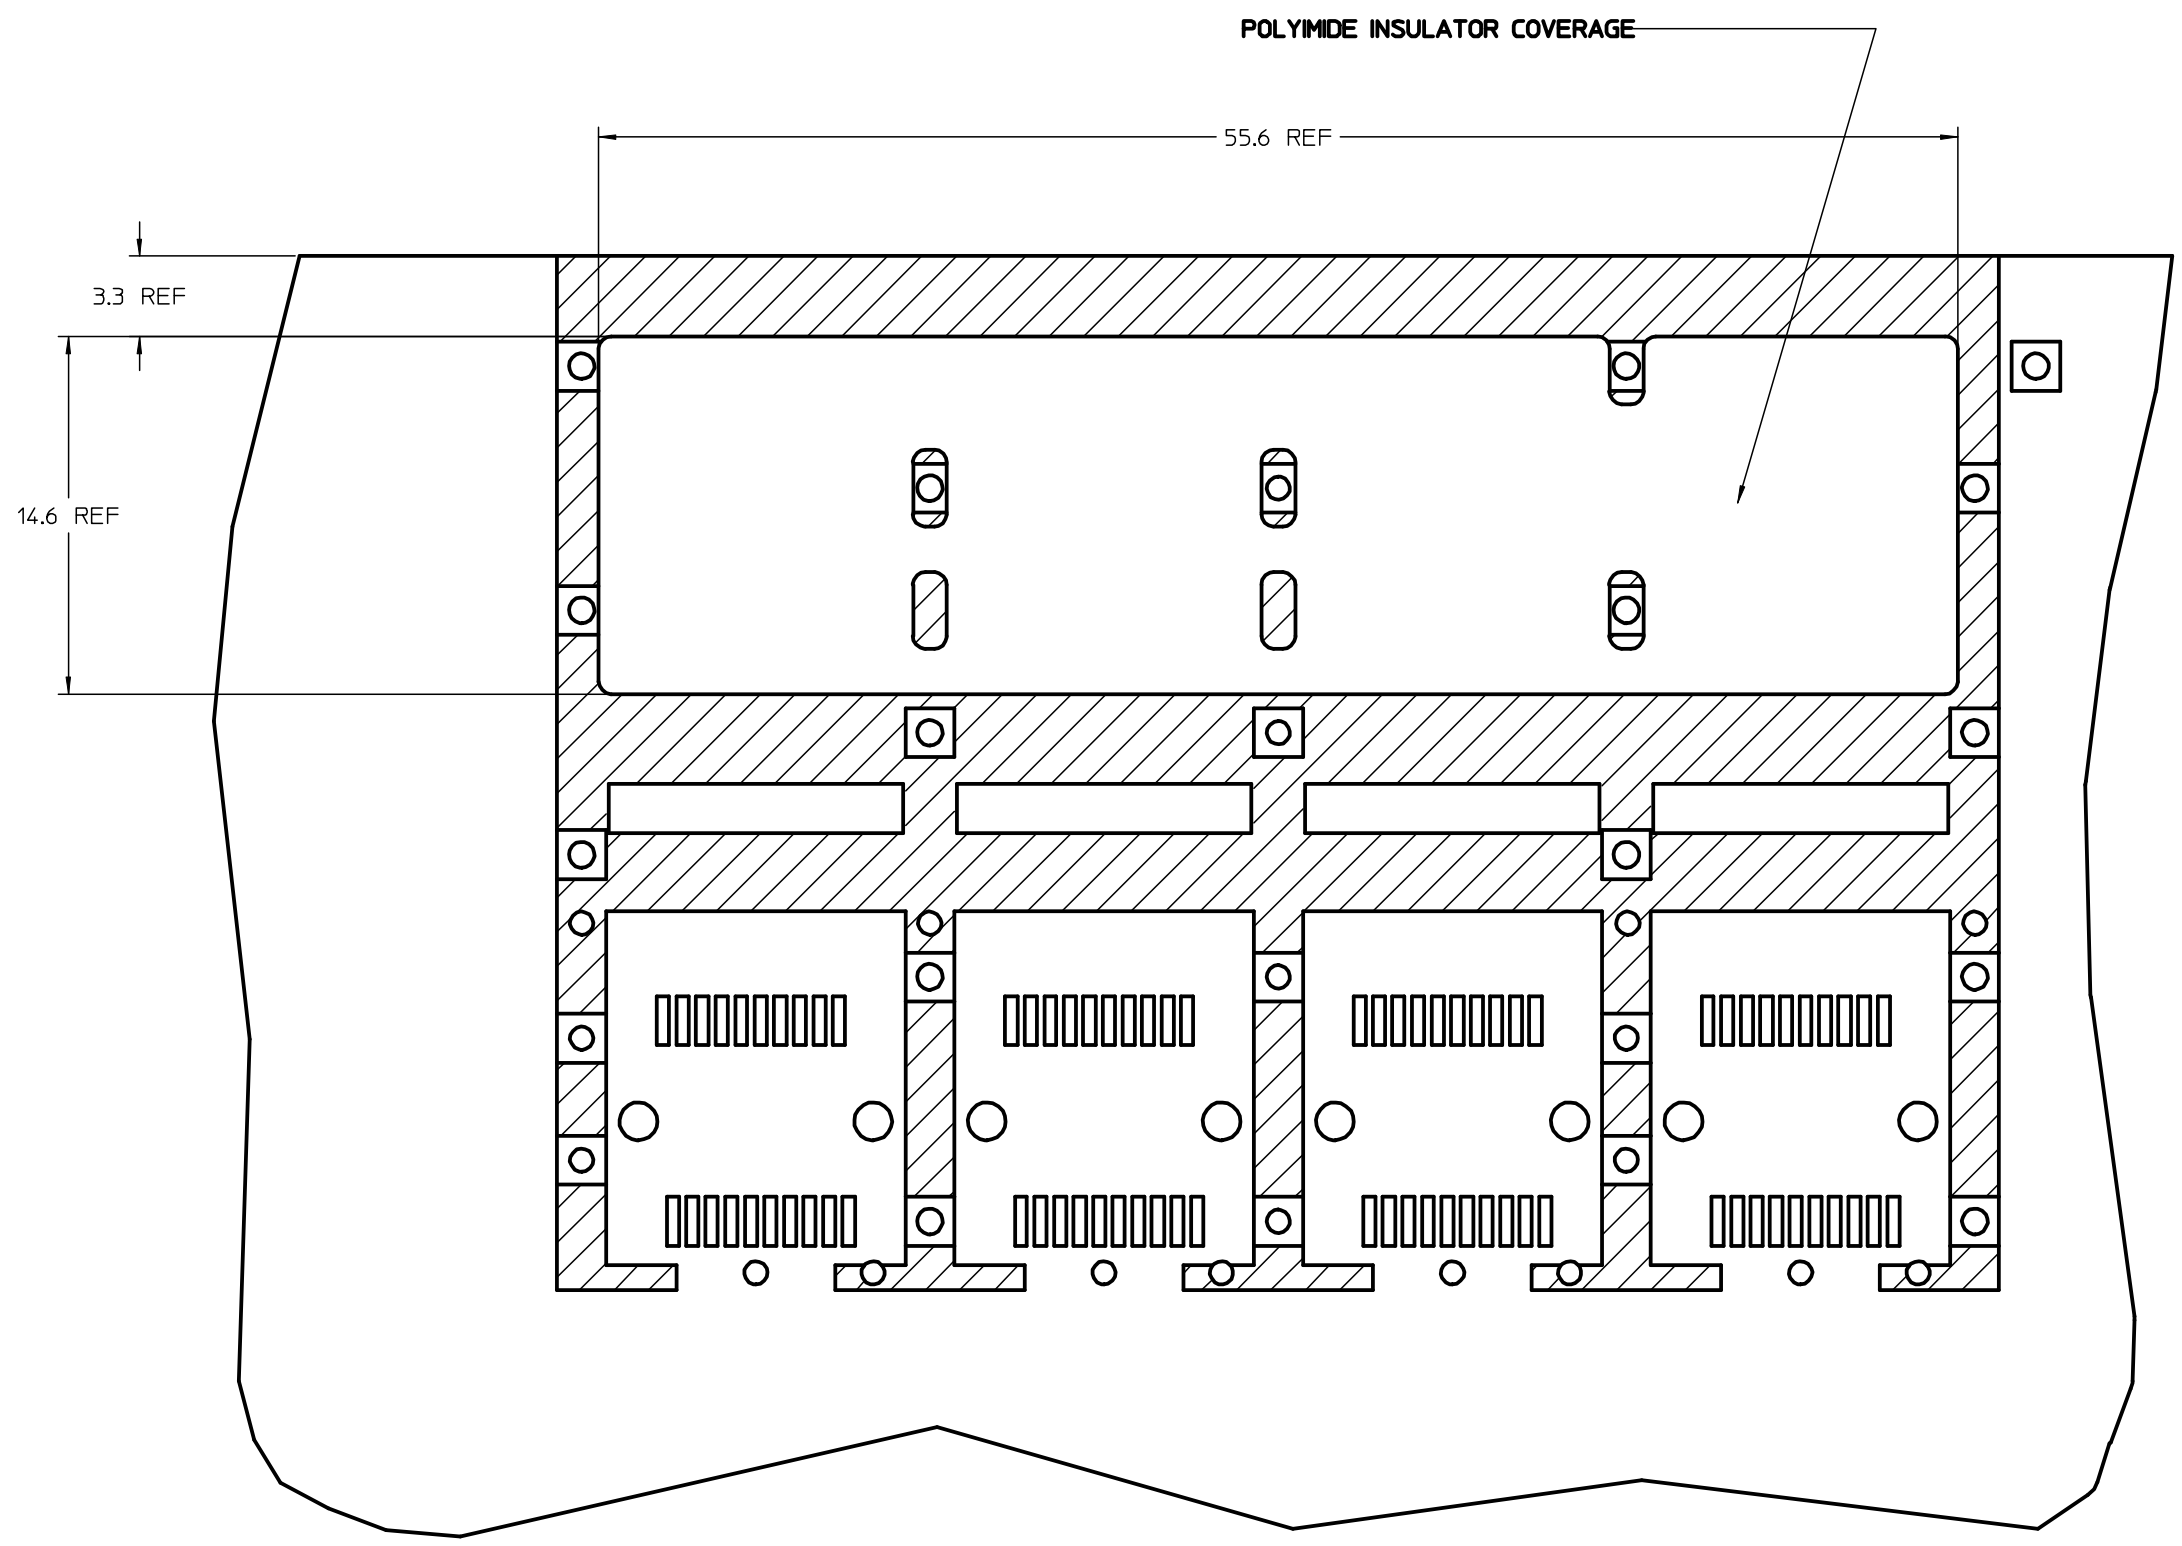

SEE REVISION TABLE
EC NO: CPG2016-2974
DRWN:ACHENG03 2016/02/02
CH'KD:
APPR:RCHEN08 2016/02/04
J
DESCRIPTION
REV

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
=0	4 PLACES	± ---	± ---
=0	3 PLACES	± ---	± ---
=0	2 PLACES	± 0.15	± ---
	1 PLACE	± 0.25	± ---
	0 PLACE	±	±

ANGULAR ± 1 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: 5:1	DESIGN UNITS: METRIC
DRAWN BY: RMIKLINSKI	DATE: 2011/06/20	
CHECKED BY: MMCKERVEY	DATE: 2011/08/26	
APPROVED BY: KLLOYD	DATE: 2012/08/14	
MATERIAL NO.: SEE SHEET 4	DOCUMENT NO.: SD-111112-2420	SHEET NO.: 7 OF 10

THIRD ANGLE PROJECTION

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

SIZE D

tb_frame_D_P_AM_T
Rev. G 2012/01/11

BEZEL AND BOARD POSITION DIMENSIONS FOR SINGLE SIDE MOUNTING
(SPRING FINGER)

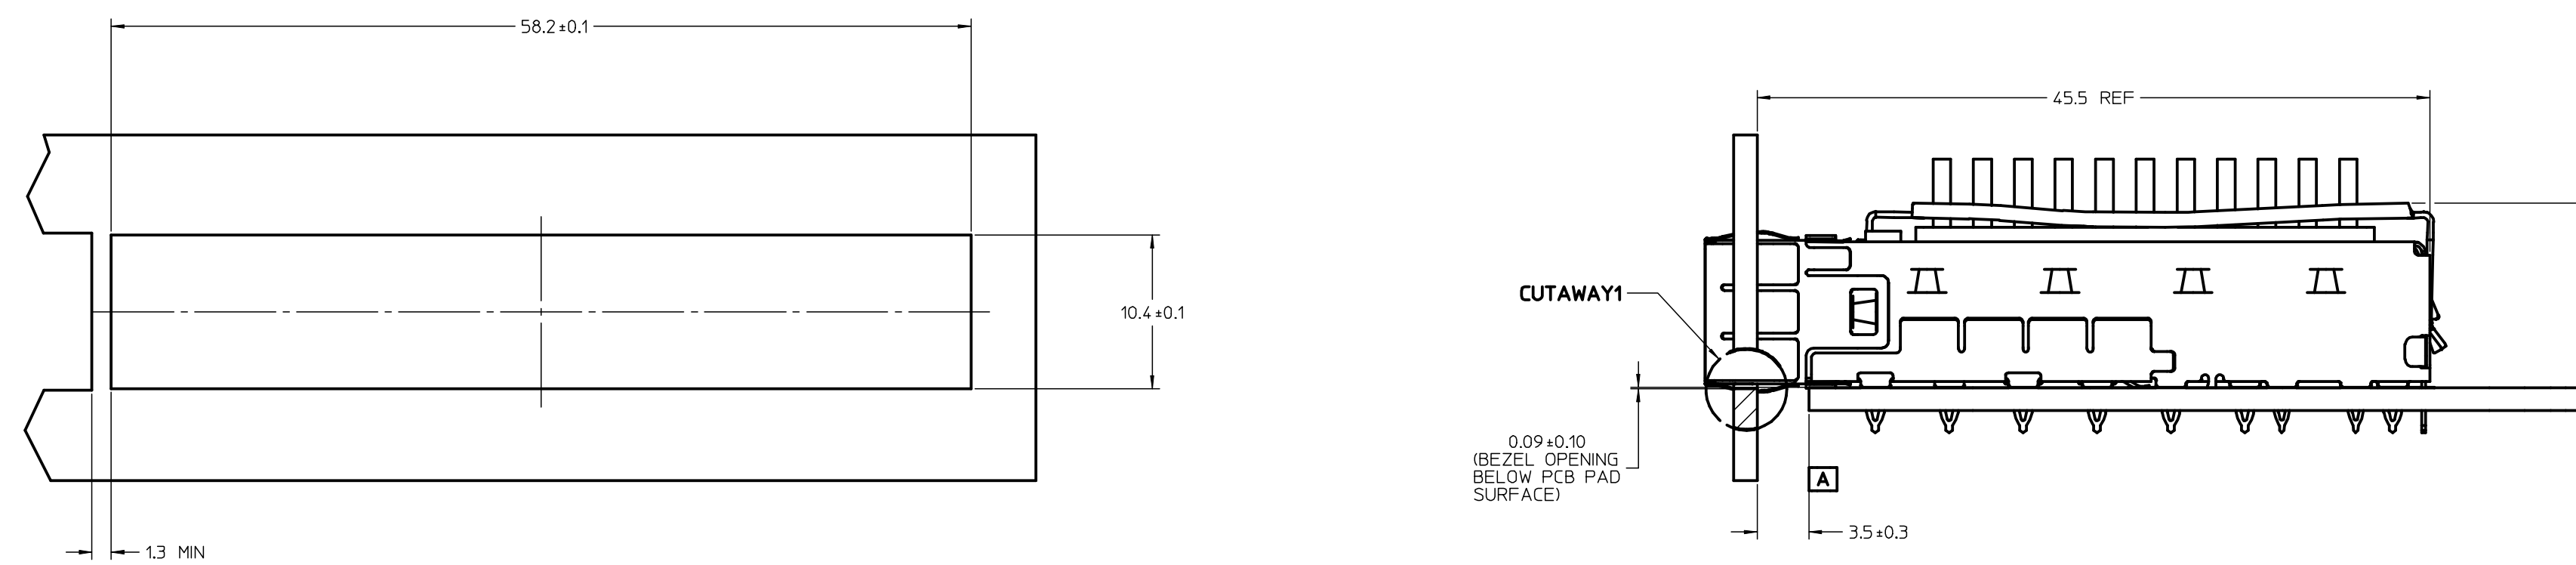

BEZEL AND BOARD POSITION DIMENSIONS FOR BELLY TO BELLY MOUNTING
(SPRING FINGER)

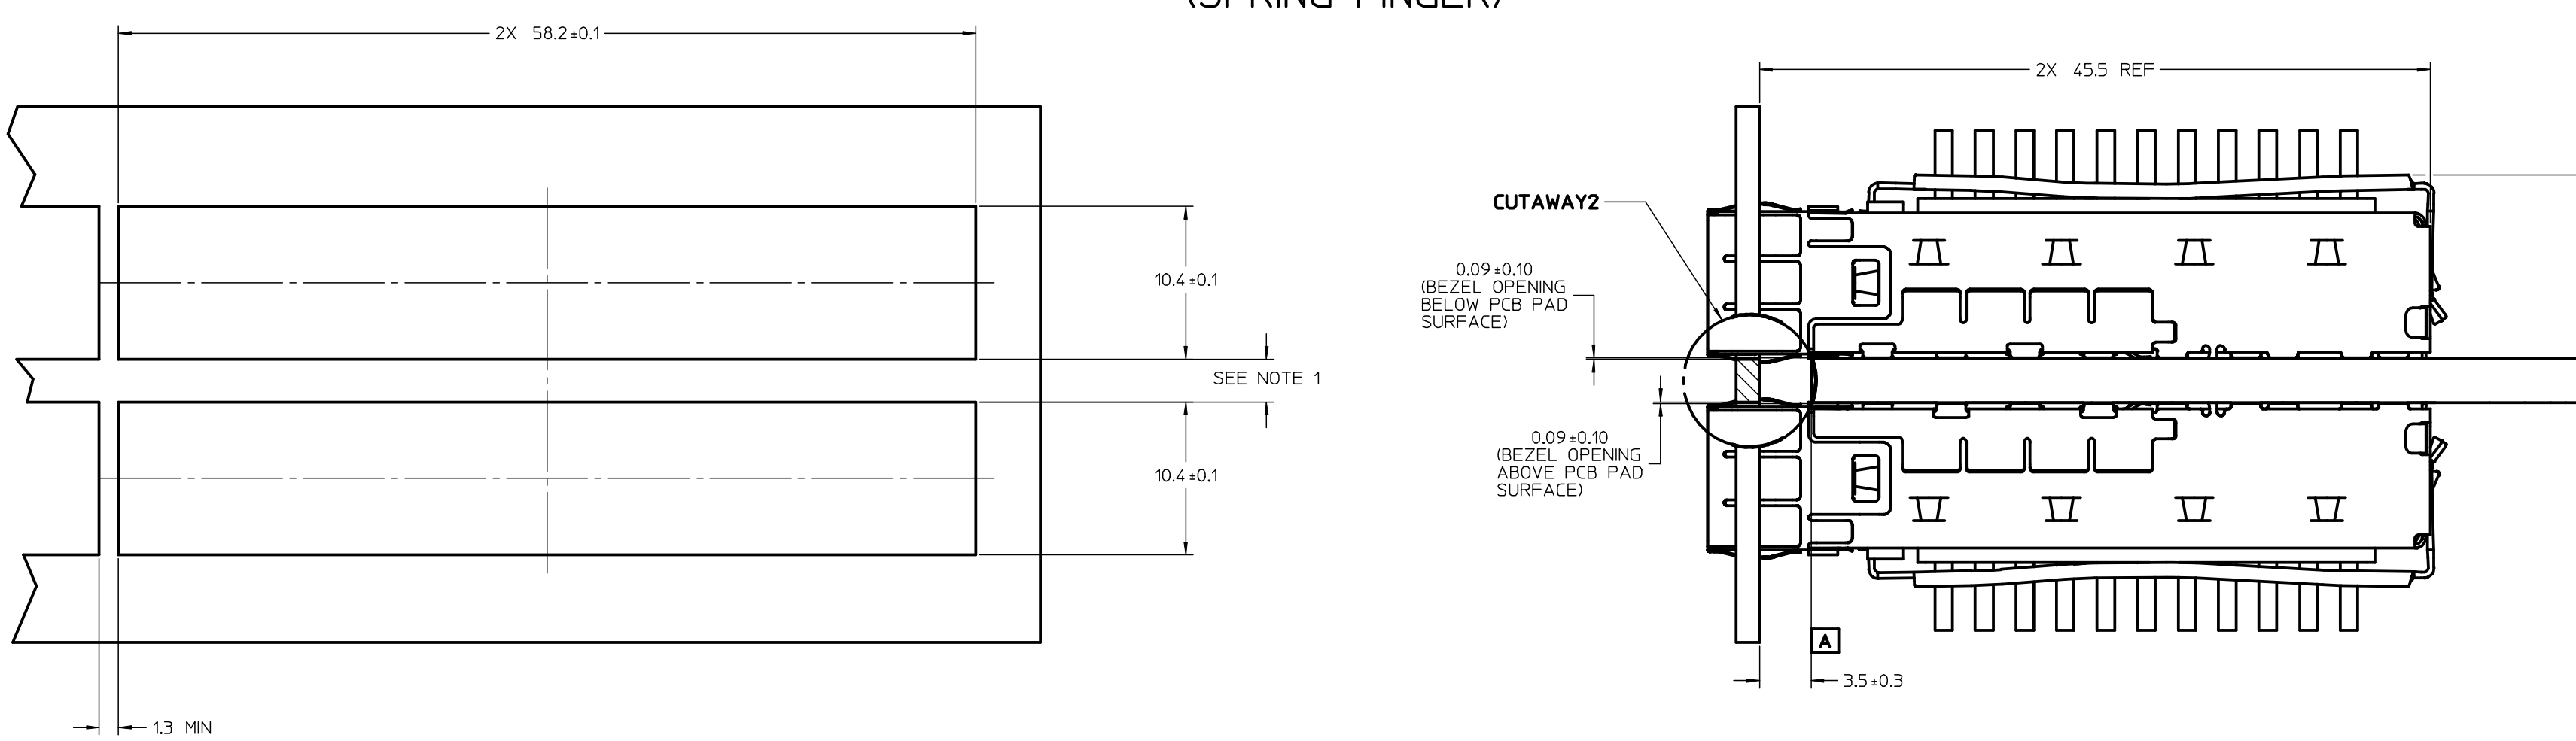

NOTE:
1. PCB THICKNESS VARIATION MUST BE CONSIDERED WHEN DETERMINING BEZEL OPENING LOCATION.
2. CAGE LEG STANDOFF WILL PIERCE BELLY GASKET WHEN PROPERLY PRESSED INTO PCB.

SEE REVISION TABLE
EC NO: CPG2016-2974
DRWN:ACHENG03 2016/02/02
CHK'D:
APPR:RCHEN08 2016/02/04
REV: J

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
=0	4 PLACES	± ---	± ---
	3 PLACES	± ---	± ---
=0	2 PLACES	± 0.15	± ---
	1 PLACE	± 0.25	± ---
=0	0 PLACE	±	±
	ANGULAR ± 1 °		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE: MM ONLY	SCALE: 4:1	DESIGN UNITS: METRIC
DRAWN BY: RMIKLINSKI	DATE: 2011/06/20	
CHECKED BY: MMCKERVEY	DATE: 2011/08/26	
APPROVED BY: KLLOYD	DATE: 2012/08/14	
MATERIAL NO.: SEE SHEET 4	DOCUMENT NO.: SD-111112-2420	SHEET NO.: 8 OF 10
SIZE: D		

THIRD ANGLE PROJECTION

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

fb_frame_D_P_AM_T
Rev. G 2012/01/11

DATE	REV	DESCRIPTION
2011/06/21	1	INITIAL RELEASE
2011/06/29	A	UPDATED THE CAGE TOP TO INCLUDE HOLES FOR LIGHTPIPES.
2012/03/20	B	REVISED NOTES; HANGED HEATSINK HEIGHT FROM 8.63 TO 6.5; TABULARIZED PCI, SAN, AND NETWORKING; ADDED HEATSINK HEIGHT WITH MODULE INSERTED [SHT1]. MOVED EXPLODED VIEW TO SHT2. CHANGED OTHER SHEET NUMBER ACCORDINGLY. REMOVED NOTE 6 AND MOVED TO SHEET 2.
2012/07/31	C	HIDE HEATSINK CLIP FROM TOP VIEW, CHANGED DIM 49.0 TO 49.3 AND ADDED "SEE TABLE ON SHEET 2" TO ANNOTATION ON VIEW BOTTOM 3, ADDED MODEL NOTATION IN TOP CORNER ON SHEET 1, ADDED KAPTON TAPE MODEL TO EXPLODED VIEW ON SHEET 2, EXPANDED P/N TABLE ON SHEET 2 TO INCLUDE HEAT SINK DIMS AND KAPTON TAPE OPTIONS, REMOVED DIM 'B' FROM SHEET 2, REWORDED ANNOTATIONS FOR CORRECT ORIENTATION ON SHEET 5.
2012/08/31	D	REMOVED HEATSINKS AND CLIPS FROM ALL VIEWS ON SHEET 1; SEPERATED HEATSINKS TO SEPERATE VIEWS ON SHEET 2 AND REMOVED P/N FROM TABLES; ADDED NEW SHEET 3 WITH VIEWS AND P/N TABLES FOR NO HEATSINK, AND PINFIELD OR LATERAL FIN HEATSINKS; MOVED DIM "0.23 TYP" ON SHEET 6. ADDED ISO VIEWS AND PART NUMBER TABLES FOR WIDE GAP HEATSINKS TO SHEET 2 AND SHEET 3. ADDED TOP VIEWS OF SINGLE AND BELLY TO BELLY PCB TO SHEET SIX TO SHOW POLYIMIDE COVERAGE AND DIMENSIONS.
2013/02/20	E	1. CHANGED BASE CAGE VIEWS ON SHEET 1 FROM 111112-0432 TO 747540420. ADDED TYP TO DIMENSION 3.05 REF ON SIDE VIEW. MOVED DIMENSIONS "10.85 REF" TO F14, "14.0 ±0.1" TO D17, "56.75 REF" TO F17, "58.65 REF" TO G17. ADDED DIMENSION "9.98 REF" @E7. CHANGED DIMENSION 49.03 TO 49.0 @ J14. ADDED BACK VIEW, @E3. REMOVED BELLY ISO VIEW AND ROTATED TOP ISO VIEW & MOVED TO J7. MOVED PCB MIN THICKNESS FROM NOTE 2 TO RESPECTIVE PCB LAYOUT SHEETS. REMOVED INSERTION FORCE FROM NOTE 2. ADDED APPLICATION NOTE @H10. UPDATED P/N DATE CODE PRINTING CALLOUT ON SIDE VIEW. UPDATED 3D MODEL P/N @M20. ADDED EMI SPRING FINGERS NOTE @H8. (SHEET 1) 2. MOVED POLYIMIDE BELLY ISO VIEW TO E9 AND ADDED REAR LEG & UNDER BELLY SPRING FINGER IDENTIFIERS. ADDED UNDERBELLY GASKET ISO VIEW @E3. ADDED TOP VIEW, @ J17. REMOVED CAGES FROM HEATSINK VIEWS. ADDED REAR LEG OPTIONS, @B16. ADDED TITLE FOR TABLES THAT READS OVERALL HEATSINK HEIGHT. ADDED POLYMIDE INSULATOR & # OF REAR LEGS PER PORT COLUMNS TO TABLES. (SHEET 2) 3. ADDED PN'S 747500420, -0422, -0423 & 1111110420 AND UPDATED TABLES, ADDING ISO VIEWS @F18 & F13. ADDED P/N NOTE FOR EACH CAGE SHOWN. (SHEET 3) 4. ADDED NOTE 5, (SHEET 4 & 5). REMOVED UNNECESSARY CAGE TO PCB CONTACT PADS FROM BELLY TO BELLY LAYOUT. ADDED TYP TO ALL DIMENSIONS (SHEET 4 & 5). ADDED DIAMETER DIMENSION 0.95±0.05 X4 WITH NOTES "SHOWN AS..." (SHEET 4). FIXED BOX TO NOT INCLUDE TYP. ADDED HOLES @E17, @E15, @E13, & E11 (SHEET 4). REMOVED PAD @F13 (SHEET 5). 5. REMOVED BELLY TO BELLY VIEW AND CENTERED & INCREASED SCALE OF SINGLE SIDED VIEW. (SHEET 6) 6. REMOVED "SEE NOTE 1" FROM DIMENSION "10.4 ±0.1", @E12 & D12. ADDED "SEE NOTE 1" BEZEL OPENING PITCH, @E12. ADDED CENTER LINES TO BEZEL OPENINGS. REMOVED CUTAWAY 7 & 8 FROM SIDE VIEWS. RENAMED CUTAWAY2 TO 1 AND 4 TO 2. REMOVED "SIZE, AND" FROM NOTE 1. ADDED DIMENSION 12.44 REF TYP TO BOTH SIDE VIEWS. REMOVED DIMENSION 9.98 TYP @E4 & J4. (SHEET 7)
2013/09/06	F	ADDED PN'S 747540426. (SHEET 3)
2013/10/14	G	1. CHANGED THE WORD "WILL" TO "MAY" ON NOTE 4. MOVED DATE CODE FROM SIDE OF CAGE TO BACK OF CAGE, ADDED NOTE AT E5 TO LIST THE SERIES NUMBERS THAT WILL HAVE THE DATE CODE INTHIS LOCATION. ADDED 0.70 MAX(BENDING TAB TO BOTTOM SURFACE OF BASE) AT E13. (SHEET 1) 2. REMOVED zSFP+ CAGE VIEW FROM SHEET AT E5, ADDED SIDE VIEW OF CAGE TO SHOW WHERE THE DATE CODE WILL BE ON ALL 111112 SERIES CAGES. (SHEET 2) 3. ADDED NEW SHEET 3 WITH GEN 1 AND GEN 2 zSFP+ OPTIONS. THE PREVIOUS SHEETS FROM SHEET 3 TO SHEET 8 ALL INCREASE BY 1 NUMBER. 4. ADDED P/N 747540427 TO TABLE AT D20 AND ADDED ISO VIEW AND TABLE FOR 1001140420 AT E3 ON SHEET 4.

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN:ACHENG03
CH'KD:
APPR:RCHEN08 2016/02/04
J
DESCRIPTION
REV

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
=0	4 PLACES	± ---	± ---
=0	3 PLACES	± ---	± ---
=0	2 PLACES	± 0.15	± ---
	1 PLACE	± 0.25	± ---
	0 PLACE	±	±
	ANGULAR ± 1 °		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE: MM ONLY	SCALE: 1:1	DESIGN UNITS: METRIC
DRAWN BY: RMIKLINSKI	DATE: 2011/06/20	THIRD ANGLE PROJECTION
CHECKED BY: MMCKERVEY	DATE: 2011/08/26	
APPROVED BY: KLLOYD	DATE: 2012/08/14	

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

MATERIAL NO.: SEE SHEET 4

DOCUMENT NO.: SD-111112-2420

SHEET NO.: 9 OF 10

SIZE: D

tb_frame_D_P_AM_T
Rev. G 2012/01/11

DATE	REV	DESCRIPTION
2014/09/24	H	1. ADDED 74754-0426 PLATING SPEC. [SHEET 4] 2. ADDED P/N 74754-0464. [SHEET 4]
2015/08/26	I	1. SHEET 3 : ADDED NOTE 2 2. SHEET 2: J13 : ADDED NEW VERTICAL FIN HEATSINK ISOVIEW 3. SHEET 4: H10 : ADDED (*) FOR LOW COST IN NOTE 4. SHEET 4: I10 : ADDED PART NO. 111112-5421 ON P/N TABLE 5. SHEET 5: K18 : ADDED PART NO. 111112-6421 ISOVIEW 6. SHEET 6: G20 : CHANGED Ø1.05+/-0.05 X14 TO Ø 14X 1.05+/-0.05 7. SHEET 6: D19 : CHANGED Ø0.95+/-0.05 X20 TO Ø 20X 0.95+/-0.05 8. SHEET 6: D14 : CHANGED Ø0.95+/-0.05 X4 TO Ø 4X 0.95+/-0.05 9 SHEET 7: G18 : CHANGED Ø1.05+/-0.05 X28 TO Ø 28X 1.05+/-0.05 10.SHEET 7: C16 : CHANGED Ø0.95+/-0.05 X28 TO Ø 28X 0.95+/-0.05 11.SHEET 9: ADDED NOTE 2 MODIFIED PCB LAYOUT PER SFF-8433 12.SHEET 6: G20 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 C19 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 C14 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 13.SHEET 7 :F18 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1 C16 : CHANGED TURE POSITION OF PCB HOLES FORM 0.05 TO 0.1
2016/02/02	J	1. SHEET 3 & 4: REMOVE 1111110420

SEE REVISION TABLE
EC NO: CPG2016-2974 2016/02/02
DRWN:ACHENG03
CH'KD:
APPR:RCHEN08 2016/02/04
DESCRIPTION
J
REV

QUALITY SYMBOLS
=0
=0
=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.15	± ---
1 PLACE	± 0.25	± ---
0 PLACE	±	±

ANGULAR ± 1 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	DATE
RMIKLINSKI	2011/06/20
CHECKED BY	DATE
MMCKERVEY	2011/08/26
APPROVED BY	DATE
KLLOYD	2012/08/14

TITLE: SFP+ 1X4 CAGE, .120 INCH PRESS FIT, HEAT SINKS, WITH EMI SPRING FINGERS

molex

MATERIAL NO.: SEE SHEET 4
DOCUMENT NO.: SD-111112-2420
SHEET NO.: 10 OF 10
SIZE: D