

(原南京米联电子科技有限公司)


Num	PAGE
01	01_Title.schdoc
02	02_BK1213141516
03	03_BK322234.schdoc
04	04_BK0&FLASH.schdoc
05	05_GTX.schdoc
06	06_PWR.schdoc
07	07_DDR_32.schdoc
08	08_DDR_64.schdoc
09	09_PMU.schdoc
10	10_connector.schdoc
11	
12	
13	
14	
15	




核心板具体参数

FPGA	XC7K160T-FFG676-2i	逻辑单元(Logic Cells)	162240
DDR3	2GB(4片512MByte), 数据时钟1600MHZ*64bit	Slices	25350
FLASH	256Mbit QSPI FLASH, 用于固化程序, 存放数据	Total Block RAM (Kb)	11700
晶振	100MHZ x1, 用户时钟	DSP48 Slices	600
	底板板载一颗可编程时钟芯片, 为GTX信号提供时钟源	CLB Flip-Flops	202800
电源管理	集成电源管理, 内核1.0V, 提供20A电流能力	GTX Transceivers (12.5 Gb/s Max Rate)	8
JTAG	1路JTAG接口, 使用下载器进行调试和下载	速度等级	-2
LED	1路用户LED	温度等级	工业级
按键	1路用户按键	扩展口定义	
外形	60(mm)x70(mm)	IO数量	232个IO/116对差分
连接器	120PINX3, 0.6mm间距	GTX	8对GTX
电源	DC-12V		




Title		
Size A4	Number	Revision
Date:	2019/8/13	Sheet of
File:	F:\2019\...\01 Title.SchDoc	Drawn By:


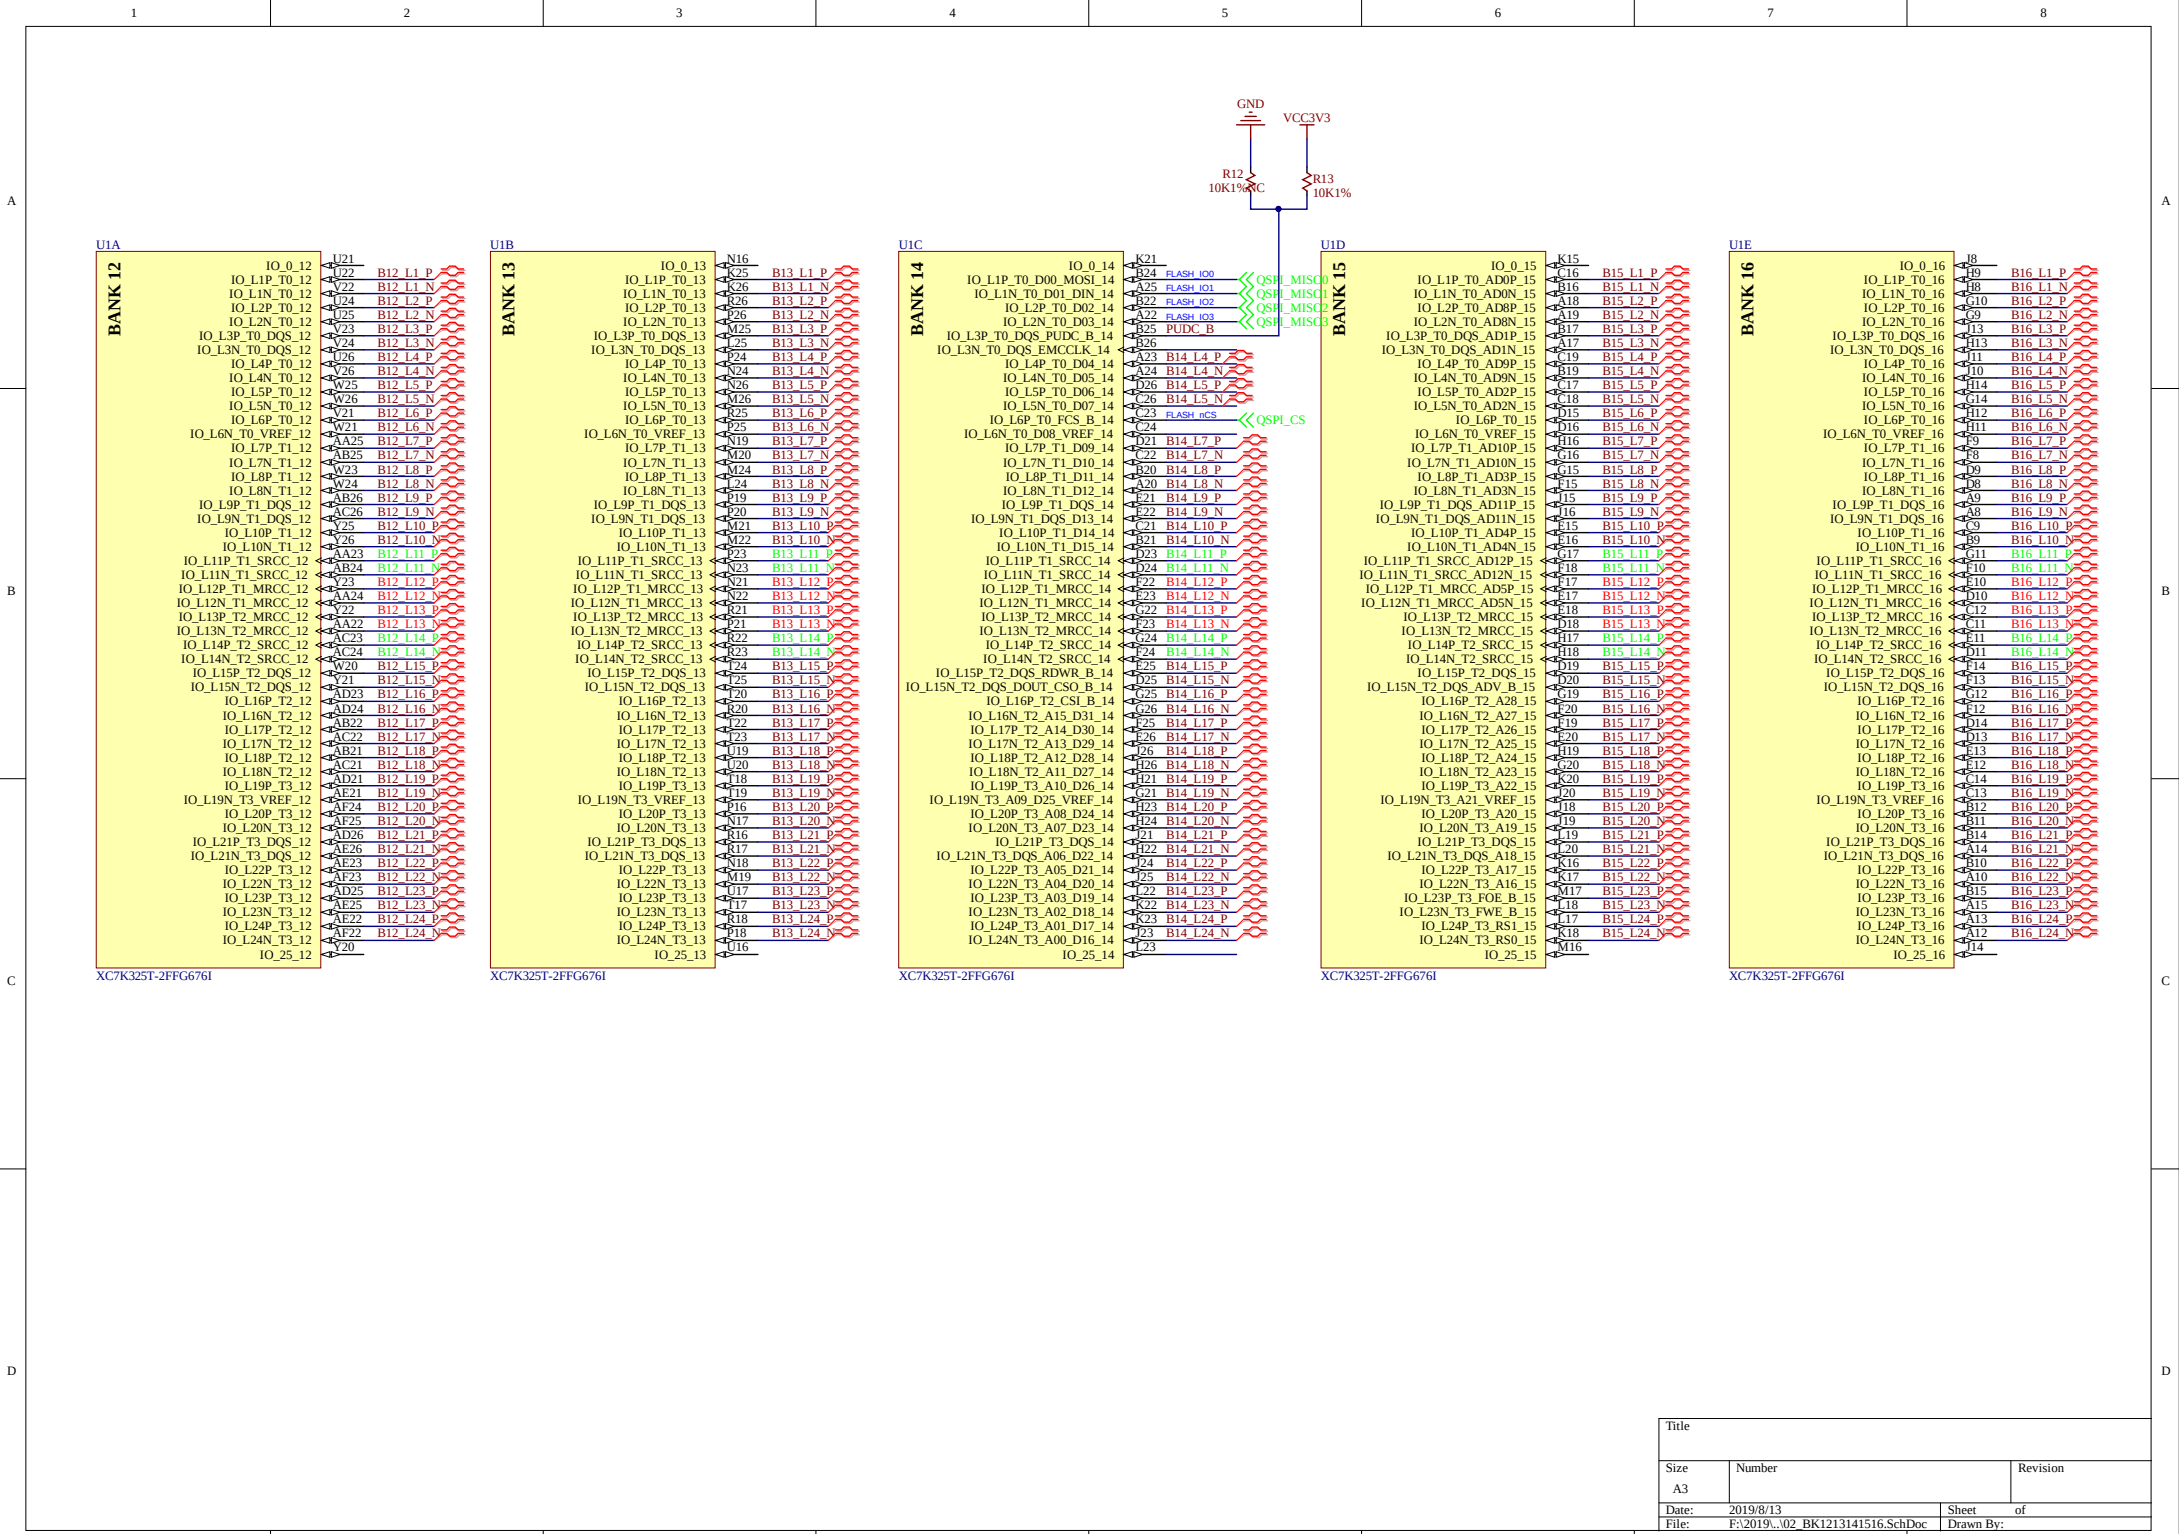











Title		
Size	Number	Revision
A3		
Date:	2019/8/13	Sheet of
File:	F:\2019...02 BK1213141516.Sch.Doc	Drawn By:

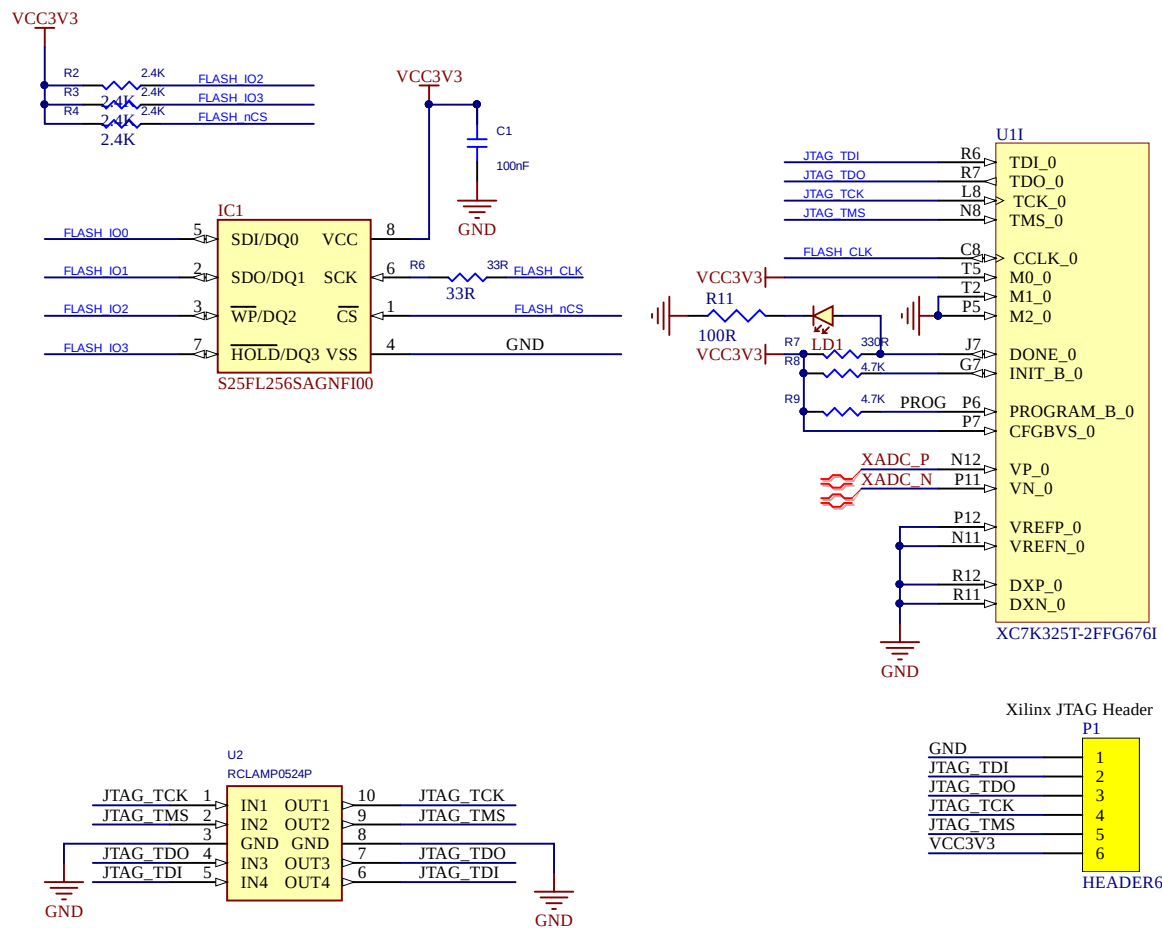

Title		
Size	Number	Revision
A4		
Date:	2019/8/13	Sheet of
File:	F:\2019\..04_BK0&FLASH.SchDoc	Drawn By:

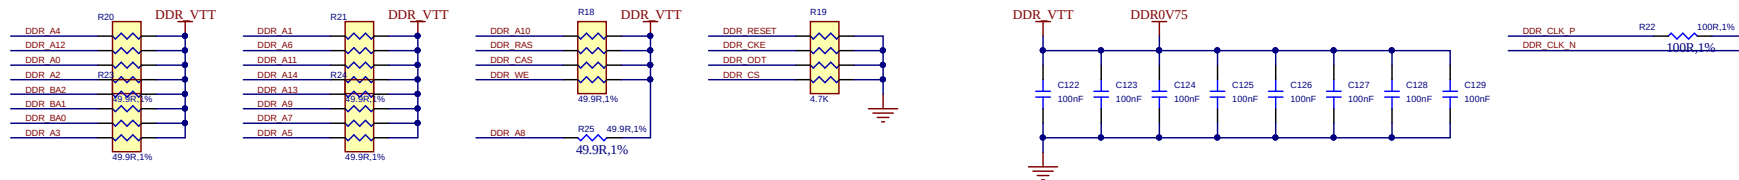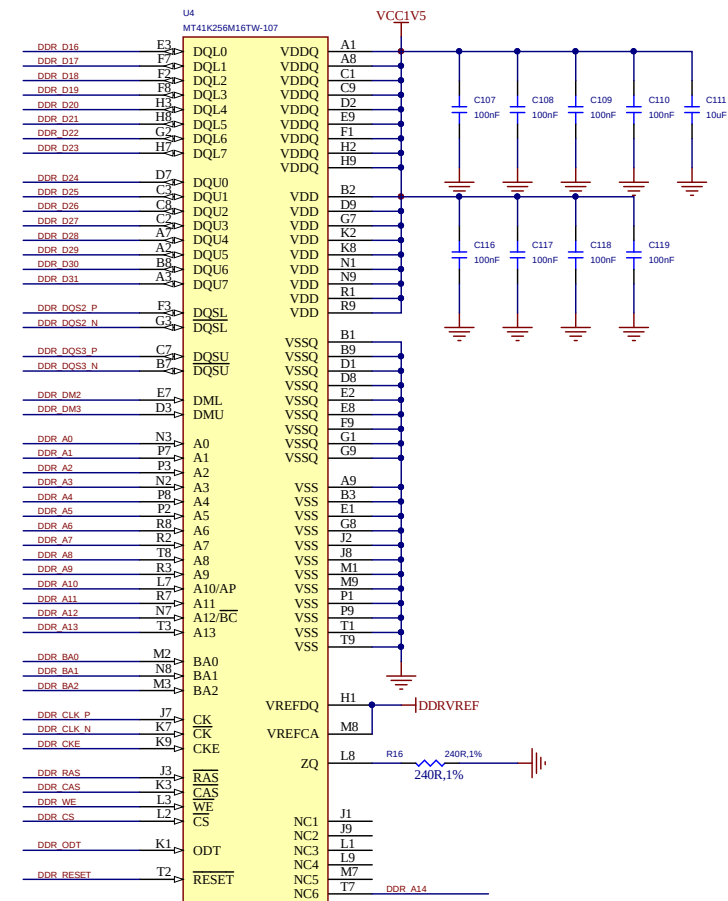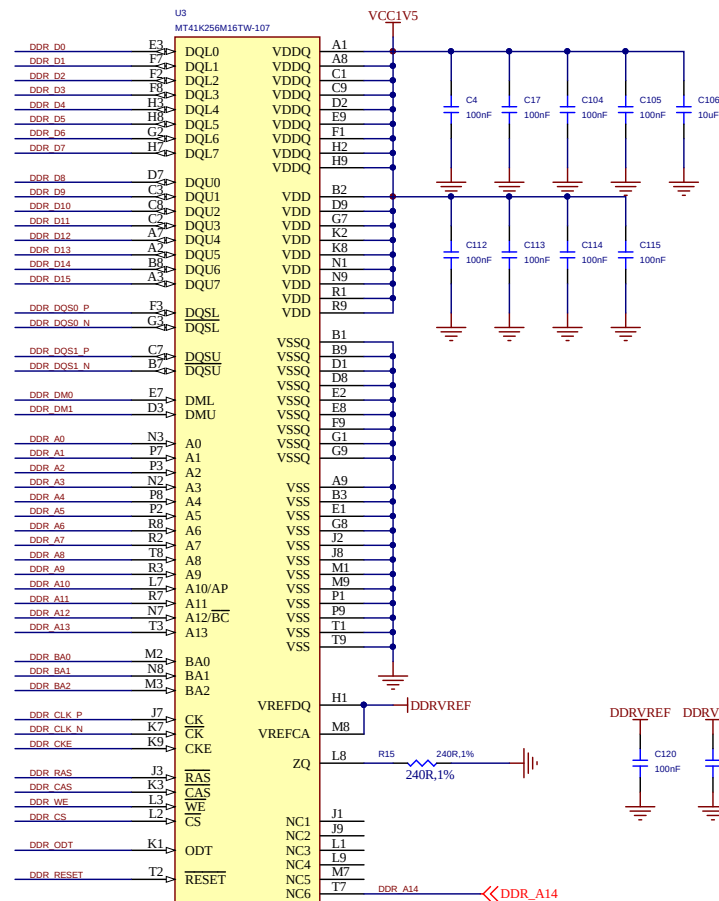

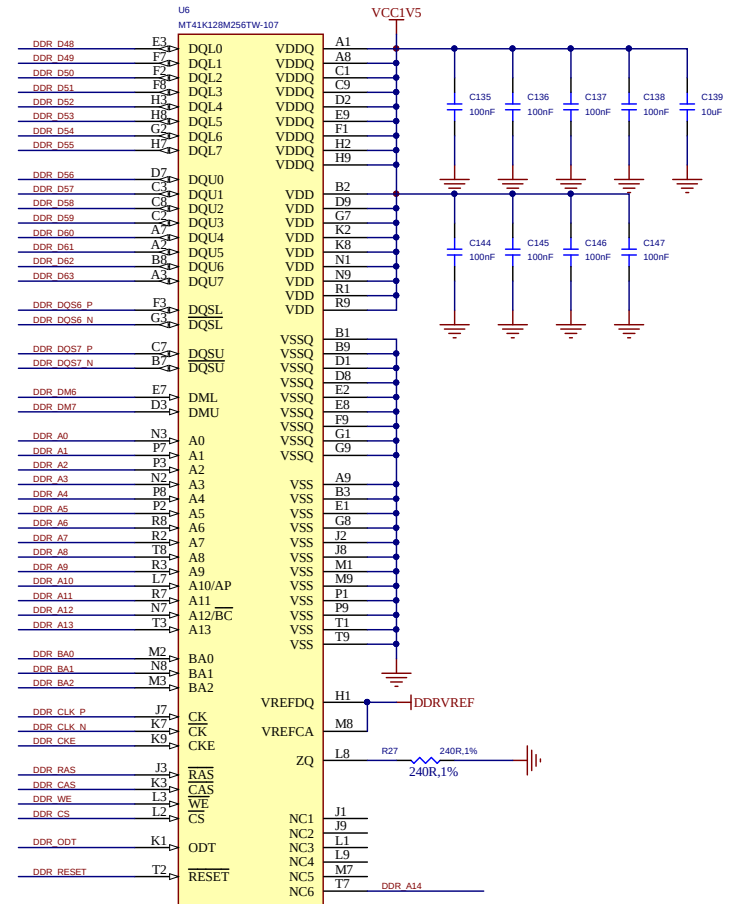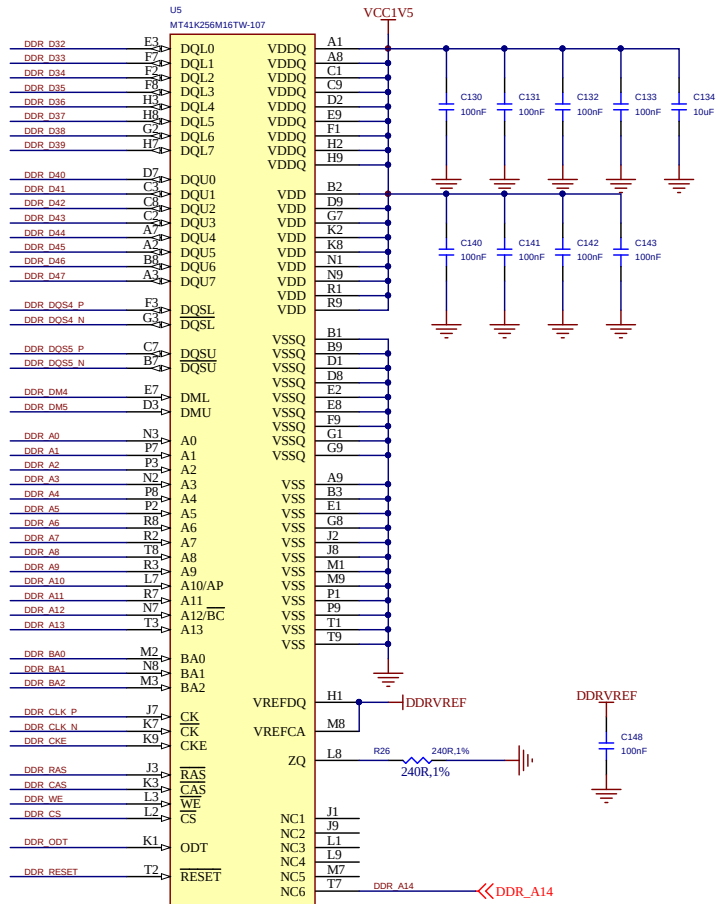

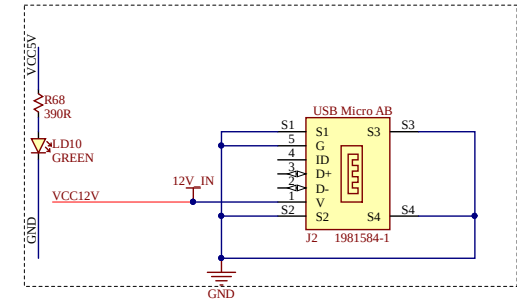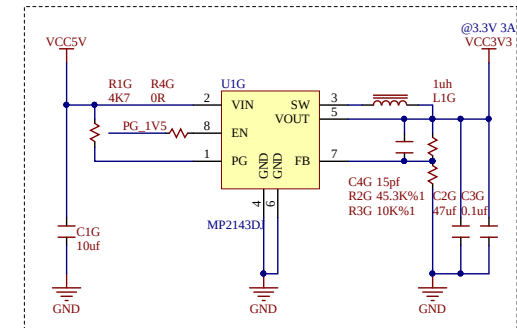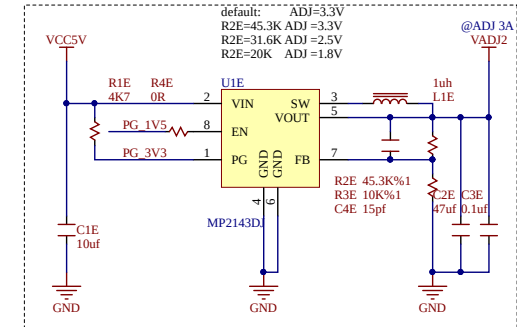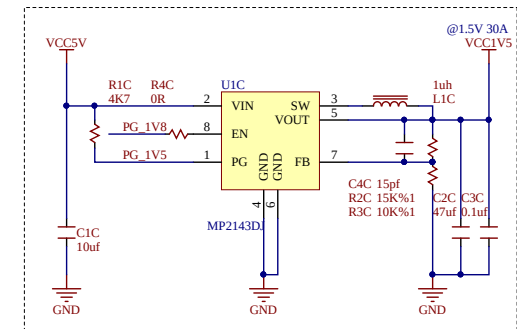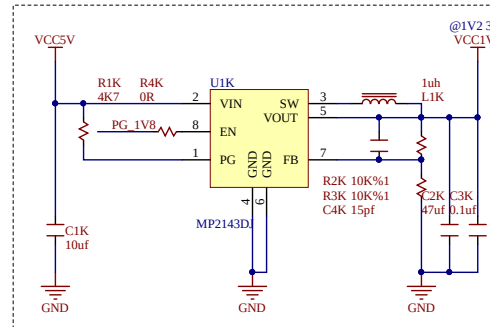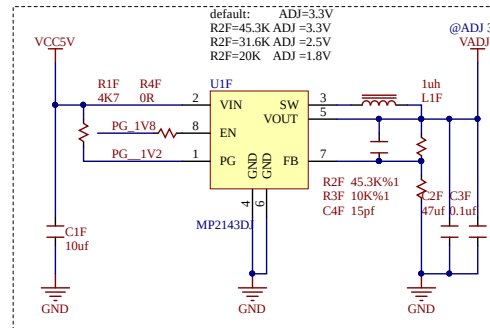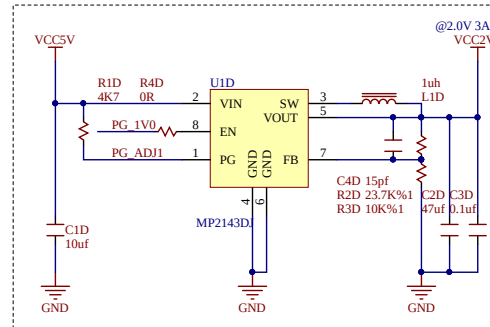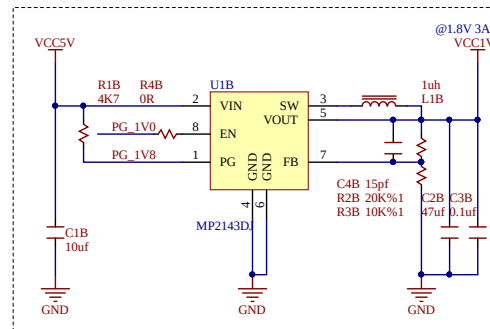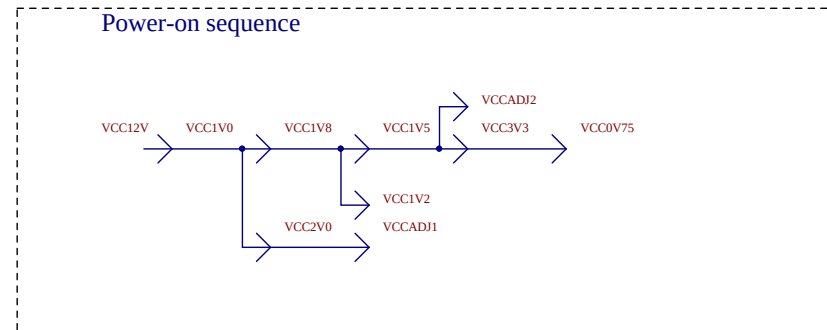

Title		
Size A3	Number	Revision
Date:	2019/8/13	of
File:	F:\2019\...09 PMU.SchDoc	Drawn By:

引出8对GTX 最高速度每个通道 10.3125Gbps