
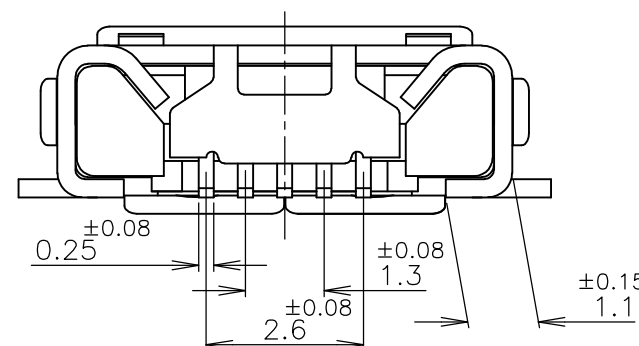
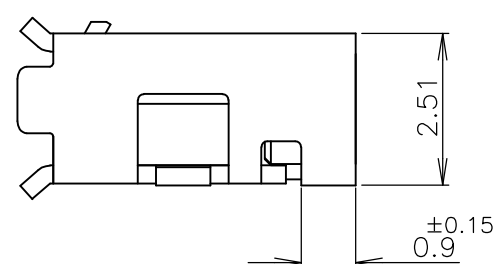
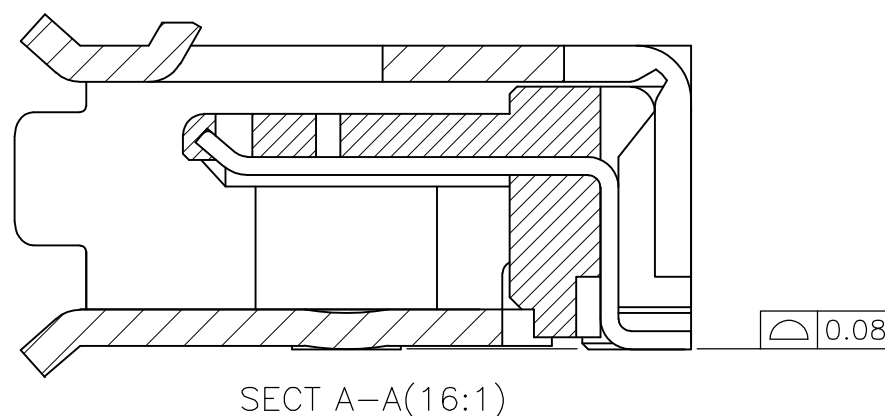


PCB LAYOUT(REFERENCE)
(VIEWED FROM CONNECTOR MOUNT SIDE)

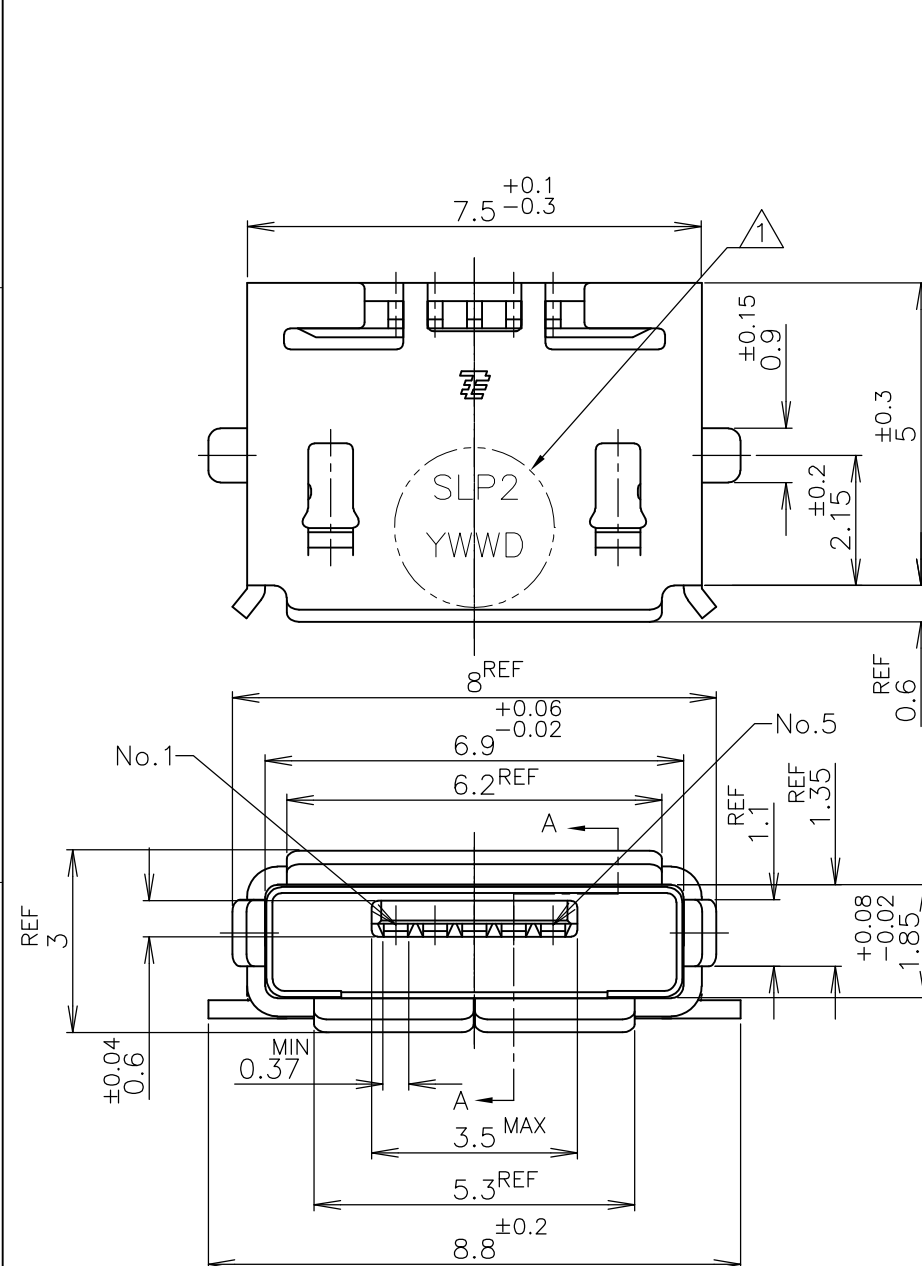

- ① DATE CODE AND VERSION MARKING
2. OVERALL TOLERANCE: ± 0.2
3. MATERIAL HOUSING : THERMOPLASTIC RESIN UL94V-0
 CONTACT : COPPER ALLOY
 SHELL : STAINLESS STEEL
4. FINISH CONTACT : Ni UNDER PL
 Au PL AT
 SHELL : Ni UNDER PL
 Sn PL

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.TSUJI		 TE Connectivity	
DIMENSIONS: 単位： 耗 MM		CHK T.KUSUHARA			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD T.KUSUHARA		NAME 名称	
0 PLC 1 PLC 2 PLC 3 PLC 4 PLC ANGLES ± - ± - ± - ± - ± - ± 10		PRODUCT SPEC 製品規格 108-78434		MICRO USB RECEPTACLE STANDARD TYPE AB ASSY	
MATERIAL 材料		APPLICATION SPEC 取付適用規格		SIZE	CAGE CODE
		WEIGHT		DRAWING NO 番号 A300779	
		CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE 尺度 8:1	SHEET 1 OF 2
				REV D1	

4




3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION JAN ,2007. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
		P	LTR	DESCRIPTION	DATE
J				SEE SHEET 1	

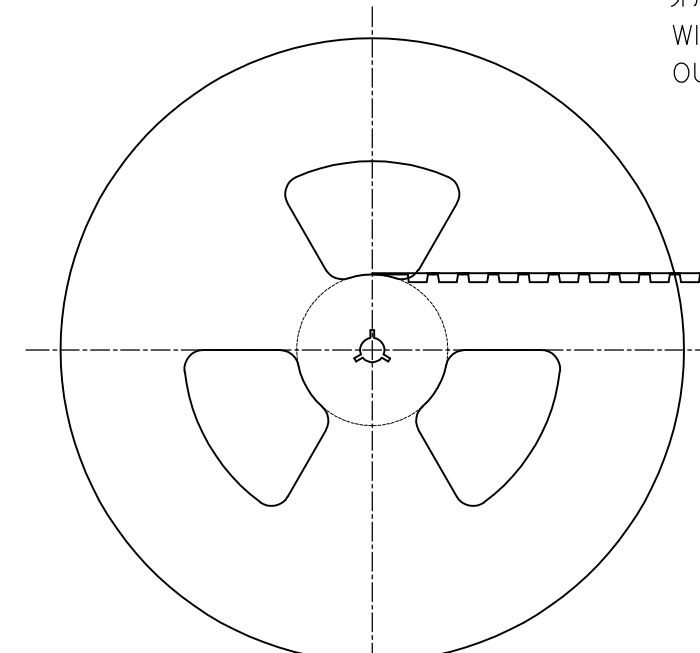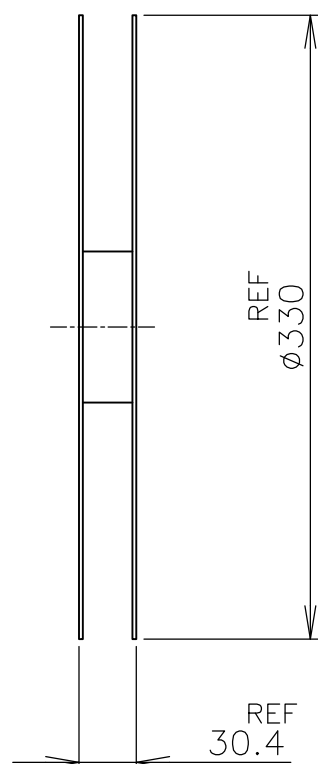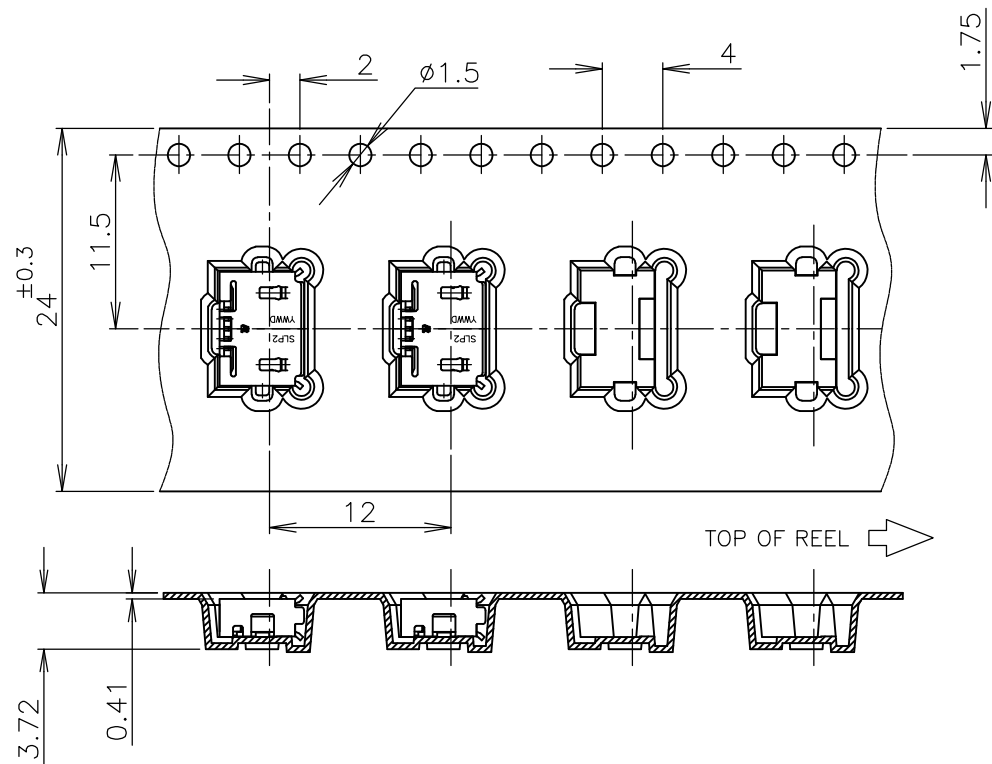

カバートープリーダー部
外周1巻
WIDE COVER TAPE AROUND
OUT PERIPHERY 1 TURN

剥離強度 0.1-1.3N MAX(300±10mm/min)
PEELING STRENGTH
剥離強度 165~180°
PEELING ANGLE

引き出し方向
TOP OF REEL


1000個/リール
1000EA/REEL

HOLES
8穴

空 部
WITHOUT CHARGE
300mm程度
APPROX

製品装填部
WITH PRODUCT CHARGE

空 部
WITHOUT CHARGE
600mm程度
APPROX

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity			
		CHK				
		APVD				
DIMENSIONS: 単位: 耗 MM		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		NAME 名称		
		0 PLC	±	MICRO USB RECEPTACLE STANDARD TYPE AB ASSY		
		1 PLC	±			
		2 PLC	±			
		3 PLC	±			
MATERIAL 材料		4 PLC	±	SIZE CAGE CODE DRAWING NO 番号		
		ANGLES	±			
		FINISH 仕上		RESTRICTED TO		
				A300779C-1981584		
				CUSTOMER DRAWING		
				SCALE 2:1 SHEET 2 OF 2 REV D1		