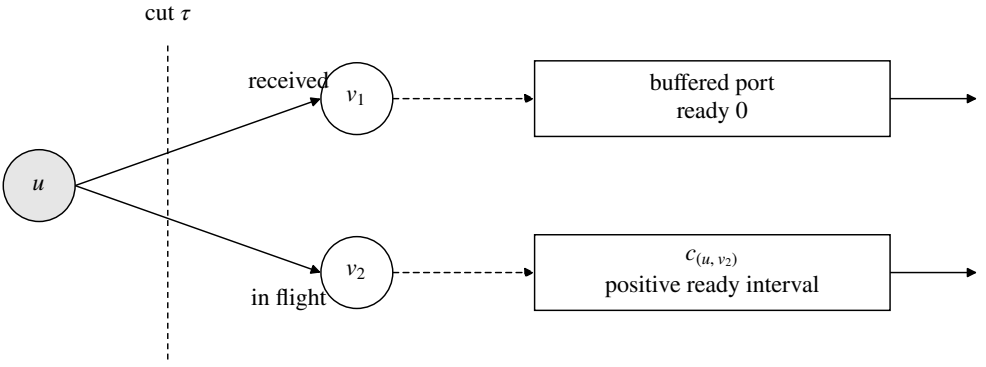
cut τ
received
v_1
buffered port
ready 0
u
v_2
$c_{(u, v_2)}$
positive ready interval
in flight