

INTERNET OF THINGS –GROUP 4

PUBLIC TRANSPORTATION OPTIMIZATION

PHASE-2

STUDENT NAME : B.MOHAMMEDHAPIPU

REGISTRE NUMBER : 822621106302

COLLEGE NAME : ARIFA INSTITUTE OF TECHNOLOGY,NAGAPATTINAM.


COLLEGE CODE : 8226

NM ID : aut2282260005

EMAIL ID : mohammedhapipu@gmail.com

SYSTEM IMPLEMENTATION:

This paper we present Intelligent Transport System show in figure1 which will allows the passenger to take alternative choices depending upon their situations. It proposes the latest and advance technique for existing system.

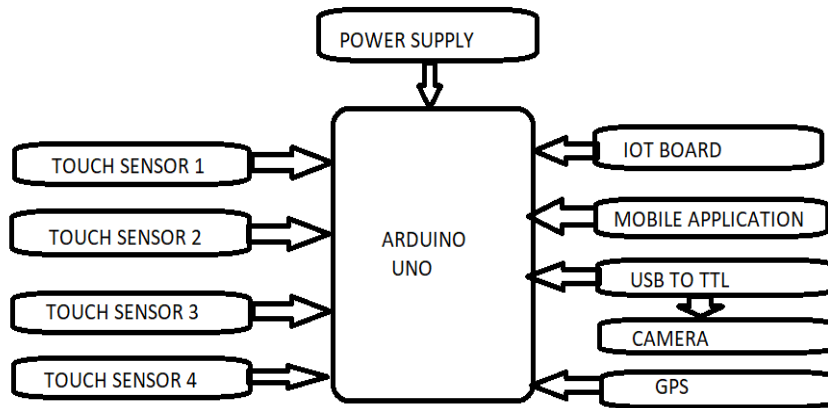


Block Diagram of the Intelligent Transport System

The input 230V supply is converted into 12V by using step down transformer, which is given to the voltage regulator to convert it as 5V supply. The proposed system presents setting availability by using touch sensor. This sensor is placed at the bottom of each seat to take the exact count of occupied and unoccupied seats. When the passenger count is calculated using USB camera. This camera is used to capture each seat in bus depending upon the captured image we can predict the passenger count. GPS module is used to find the current location of the bus by showing the latitude and longitude. The information from the touch sensor and GPS module is sent to ARDUINO Uno through serial communication. The ARDUINO Uno transmits this information to the IoT module, which will display in an Android App. This bus tracking system proposes where the passengers can get the information about the seating availability, exact location and bus arrival time by using the Android App. By using this system, the passengers can get the real-time information of the bus.

CIRCUIT DIAGRAM:

In this circuit diagram, the GPS and Touch sensor output is displayed on the web page by using the software Arduino IDE and it is coded by using Embedded C programming. At the same time the cameras output is got through Anaconda Navigator which is coded by using Python programming. These data's are gathered in IoT serially and it is displayed in Android App on real-time basis.

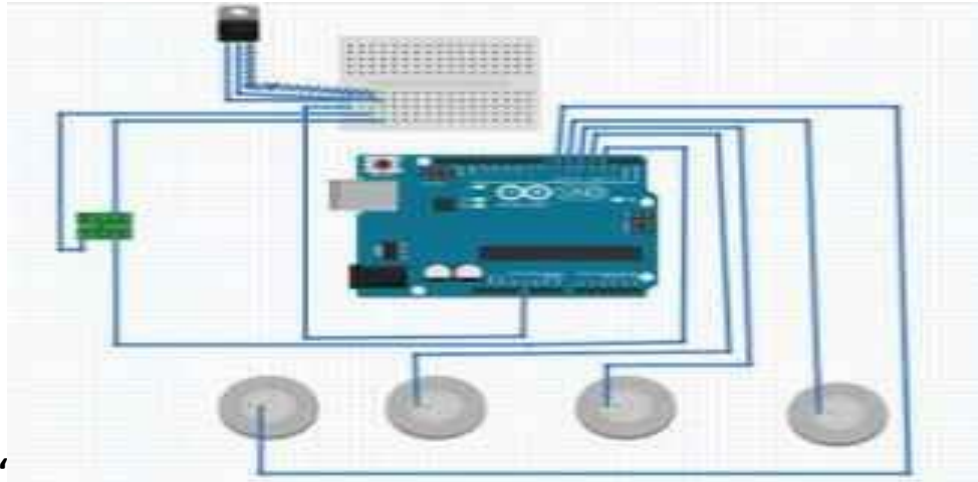

Circuit Diagram of the Intelligent Transport System

OPERATIONAL SPECIFICATION :

HARDWARE IMPLEMENTATION:

A. Arduino Uno

ANALOG INPUT:

Arduino atmega-328 microcontroller board consist of 6 analog pins. These analog inputs can be named from A0 to A5. From these 6 analog inputs pins, we can do the process by using analog inputs. Analog inputs can be used in the operating range of 0 to 5V.

DIGITAL INPUT:

Digital inputs can be defined as the non continuous time signal with discrete input pulses. It can be represented as 0's and 1's. These digital inputs can be either on state or in off state. Arduino atmega328 microcontroller also consists of 12 digital input pins. It can be stated as D0 to D11. Nearly 12 inputs can be used for digital input/output applications.

- ATmega328-AU microcontrollerwithUNOBootloader Installed.
- USB Programming Facilitated by the CH340G.
- USB-B Connector and cable included.
- Input voltage - 7-15V.
- 0-5V outputs with 3.3V compatible inputs.
- 14 Digital I/O Pins (6 PWM outputs).
- 6 Analog Inputs.
- ISP Header.
- 32k Flash Memory
- 16MHz Clock Speed.

B. Global Positioning System (GPS)

GPS receiver module high sensitivity gps module:-165dBm low power consumption small size support walk model The Skylab SKG13 series is a complete gps receiver module that features super sensitivity, ultra low power and small formfactor. The GPS signal is applied to the antenna input of module, and a complete serial data message with position, velocity and time information is presented at the serial interface with NMEA protocol or custom protocol. GPS is based on the high performance features of the MediaTek 3329 single-chip architecture, Its -165dBm tracking sensitivity extends positioning coverage into place like urban canyons and dense foliage environment where the GPS was not possible before. The small form factor and low power consumption make the module easy to integrate into portable device like PNDs, mobile phones, cameras and vehicle navigation systems. Dual Power Source, Serial and TTL output Free GPS Active Antenna.

- Ultra high sensitivity: -165dBm
- 22 tracking/66 acquisition-channel receiver U
- WAAS/EGNOS/MSAS/GAGAN support
- NMEA protocols (default speed: 9600bps)
- Internal back-up battery
- One serial port
- Embedded patch antenna 18.2 x 18.2 x 4.0 mm
- Operating temperature range: -40 to 85
- RoHS compliant (Lead-free)
- Tiny form factor 30mm x20mm x 8.5mm.

C. Touch Sensor

Touch Sensors are the electronic sensors that can detect touch. They operate as a switch when touched. These sensors are used in lamps, touch screens of the mobile, etc... Touch sensors offer an intuitive user interface. Touch sensors are also known as Tactile sensors. These are simple to design, low cost and are produced in large scale. With the advance in technology, these sensors are rapidly replacing the mechanical switches. Based on their functions there are two types of touch sensors- Capacitive sensor and Resistive sensor Capacitive sensors work by measuring capacitance and are seen in

portable devices. These are durable, robust and attractive with low cost. Resistive sensors don't depend on any electrical properties for operation. These sensors work by measuring the pressure applied to their surface.

D. Internet of Things (IoT)

Node MCU: ESP8266 offers a complete and self-contained Wi-Fi networking solution, allowing it to either host the application or to offload all Wi-Fi networking functions from another application processor. When ESP8266 hosts the application, and when it is the only application processor in the device, it is able to boot up directly from an external flash.

has integrated cache to improve the performance of the system in such applications, and to minimize the memory requirements. Alternately, serving as a Wi-Fi adapter, wireless internet access can be added to any microcontroller-based design with simple connectivity through UART interface or the CPU AHB bridge interface.

- SDIO 2.0, SPI, UART
- 32-pin QFN package
- Integrated RF switch, balun, 24dBm PA, DCXO, and PMU
- Integrated RISC processor, on-chip memory and external memory interfaces
- Integrated MAC/baseband processors
- Quality of Service management
- I2S interface for high fidelity audio applications
- On-chip low-dropout linear regulators for all internal supplies
- Proprietary spurious-free clock generation architecture
- Integrated WEP, TKIP, AES, and WAPI engines.

E. Camera

The purpose of a webcam is, not surprisingly, to broadcast video on the Web. Webcams are typically small cameras that either attach to a user's monitor or sit on a desk. Most webcams connect to the computer via USB, though some use a Firewire connection. Webcams typically come with software that allows the user to record video or stream the video on the Web. If the user has a website that supports streaming video, other users can watch the video stream from

their Web browsers. Webcams can also be used for video chat sessions with other people. Instead of broadcasting the video on the Web, users can set up a video chat session with one or more friends and have a conversation with live audio and video.

SOFTWARE IMPLEMENTATION

A. Arduino IDE

Arduino is an open-source platform used for building electronics projects. Arduino consists of both a physical programmable circuit board (often referred to as a microcontroller) and a piece of software, or IDE (Integrated Development Environment) that runs on your computer, used to write and upload computer code to the physical board. The Arduino platform has become quite popular with people just starting out with electronics, and for good reason.

‘This flexibility combined with the fact that the Arduino software is free, the hardware boards are pretty cheap, and both the software and hardware are easy to learn has led to a large community of users who have contributed code and released instructions for a huge variety of Arduino-based projects. There are many varieties of Arduino boards (explained on the next page) that can be used for different purposes. Some boards look a bit different from the one below, but most Arduinos have the majority of these components in common.

B. Embedded C

Embedded C is most popular programming language in software field for developing electronic gadgets. Each processor used in electronic system is associated with embedded software. Embedded C programming plays a key role in performing specific function by the processor. In day-to-day life we use many electronic devices such as mobile phone, washing machine, digital camera, etc. These all devices work based on microcontroller that are programmed by embedded C. The Embedded C code written in above block diagram is used for blinking the LED connected with Port0 of microcontroller. ‘

In embedded system programming C code is preferred over other language.

Due to the following reasons:

- Easy to understand
- High Reliability
- Portability
- Scalability
- Function is a collection of statements that is used for performing a specific task and a collection of one or more functions is called a programming language.

C. Anaconda Navigator

Hardware Requirements:

- CPU: 2 x 64-bit 2.8 GHz 8.00 GT/s CPUs
- RAM: 32 GB (or 16GB of 1600 MHz DDR3 Ram)
- Storage: 300 GB, Additional space recommended if the repository will be used to store packages built by customer.
With an empty repository, a base install requires 2GB
- Internet access to download the files from Anaconda cloud or a USB drive containing all of the files you need with alternate instructions of air gapped installations

Software & System Requirements:

- Client environment may be Windows, macOS or Linux
- MongoDB 2.6 (provided)
- Anaconda Repository license file
- Linux system accounts
- Mangod (RHEL) or mongod (Ubuntu)
- Anaconda-server

D. Python ;

- It is easy to learn and use. It is developer-friendly and high level programming language.
- Python language is more expressive means that it is more understandable and readable.
- It is an Interpreted language. This makes debugging easy and thus suitable for beginners.
- Python can run equally on different platforms such as windows, linux, unix and macintosh etc. So, we can say that python is a portable language.
- It is freely available at official web address. The source-code is also available. Therefore it is open source.
- This supports Object oriented language and concepts of classes and objects come into existence.
- Extensible
- Large standard library
- GUI programming support