


E07-433M20S

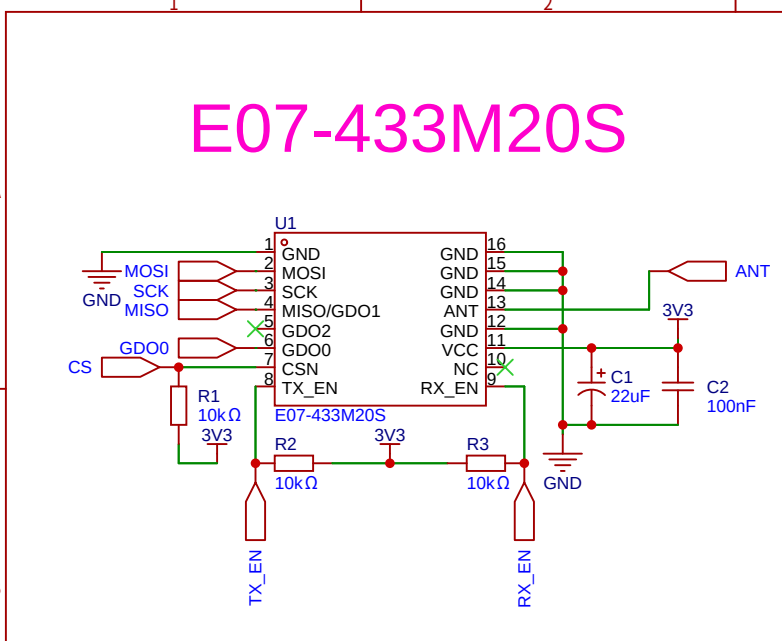


Headers

The diagram illustrates the wiring for an H4 HX PZ2.54-1x8P TP-YQ header. The header is an 8-pin connector with pins numbered 1 through 8. The connections are as follows:

- Pins 1, 2, 3, 4, 5, 6, and 7 are connected to a 5VFLIPPER module.
- Pins 1 and 7 are also connected to a common ground (GND) point.


The pins are labeled with their respective functions:

- MOSI
- MISO
- CS
- SCK
- GD00
- TX_EN

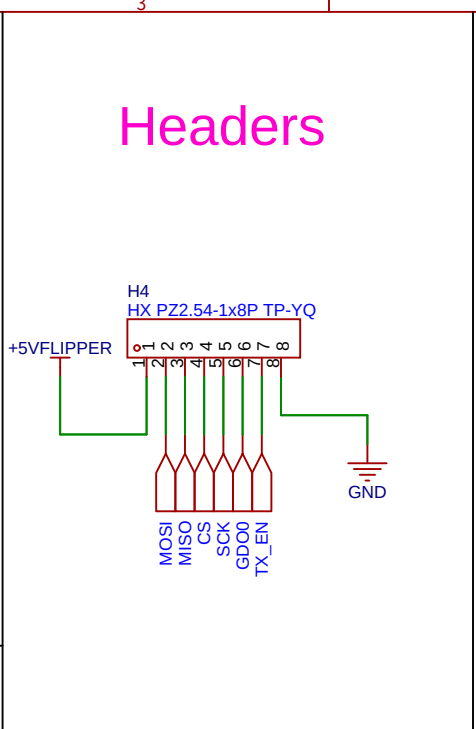


Protection

The diagram illustrates the internal structure of a USBLC6-4SC6 protection device. It features a central square box representing the device, with a small circle at the bottom-left corner. Four signal lines enter and exit the box: MOSI (top-left), GDOO (top-right), MISO (bottom-left), and SCK (bottom-right). A 3V3 power supply is connected to the top of the box, and a GND (ground) connection is shown at the bottom. The internal circuitry consists of four diodes connected in a bridge-like configuration, with each diode's cathode connected to a common ground line. The diodes are labeled with 'D' and 'S' (e.g., D1, S1, D2, S2, D3, S3, D4, S4) to indicate their specific functions within the protection circuit.

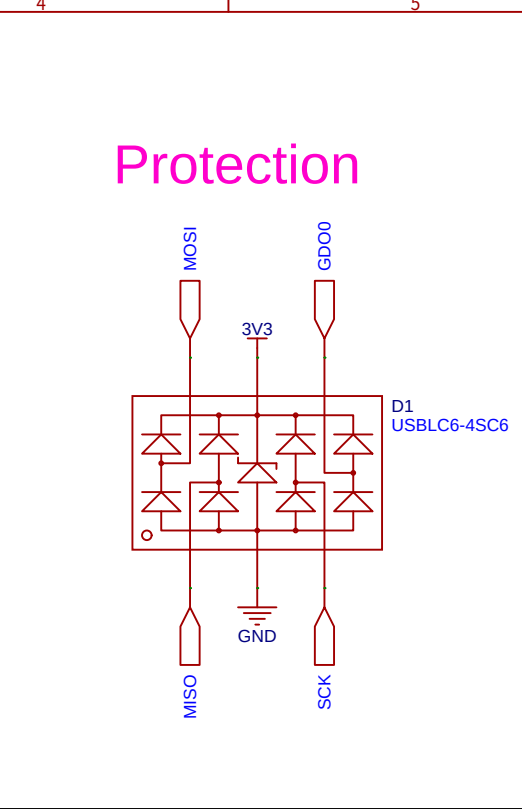


Antenna

The diagram illustrates a cross-shaped antenna circuit. A central square loop is connected to a rectangular antenna element on the right, labeled "ANT". The central loop has four terminals: 1 (top), 2 (right), 3 (bottom), and 4 (left). Terminals 1 and 2 are connected to a ground symbol labeled "GND". Terminals 3 and 4 are connected to another ground symbol labeled "GND". A rectangular component labeled "RF3" is connected to terminal 4. The antenna element "ANT" is connected to terminal 2.

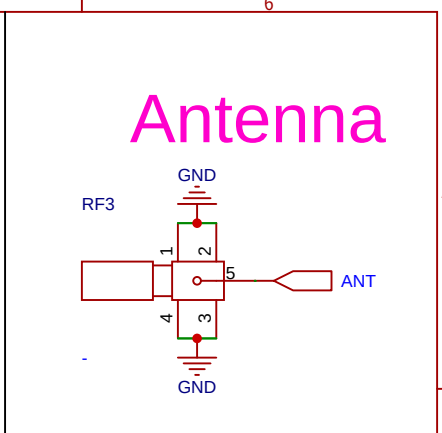


+5V Protection

The diagram shows a circuit for protecting a +5V line. A green line, labeled +5VFLIPPER, enters from the left and connects to the anode of a diode labeled D2. The diode is oriented with its cathode to the left and its anode to the right. The other end of the diode (the anode) connects to a green line labeled +5V. Below the diode symbol, the text 1N5819HW-7-F is written in blue.

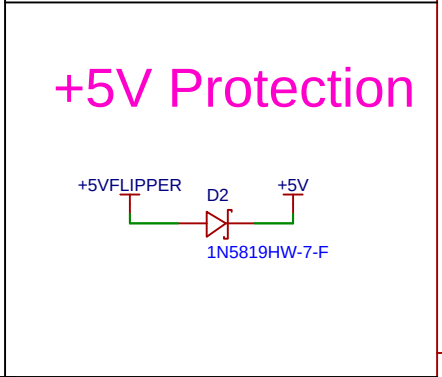


TX/RX

The diagram illustrates a TX/RX module circuit. It features a central inverter IC, U2 (HSN74LVC1G00DBVR), which is powered by a 3V3 supply. The input of the inverter (pin 1, A) is connected to the TX_EN signal. The output of the inverter (pin 4, Y) is connected to the RX_EN signal. The inverter's ground (pin 3, B) and VCC (pin 5) are connected to ground and the 3V3 supply, respectively. The TX_EN signal is also connected to an LED (LED3, YLED0603R) through a 1kΩ resistor (R4). The RX_EN signal is connected to an LED (LED2, XL-1608UBC-04) through a 1kΩ resistor (R5). The RX_EN signal is also connected to a 100nF capacitor (C3) and a 1uF capacitor (C4), which are connected to ground. The TX_EN signal is connected to ground through a 1kΩ resistor (R4).

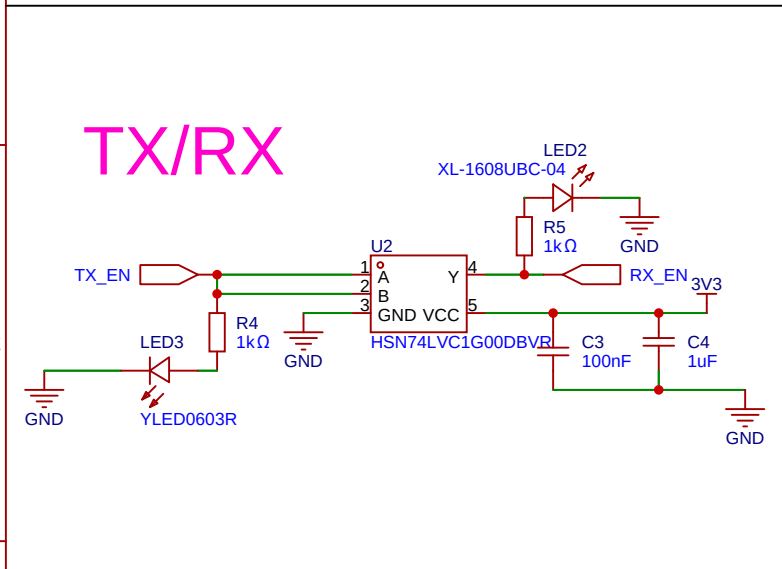

The diagram shows an LP2985-33DBVR voltage regulator (U3) configured as a 3.3V regulator. The input (+5V) is connected to the VIN pin (pin 1) through a 100nF capacitor (C5). The GND pin (pin 2) is connected to ground through a 10nF capacitor (C6). The ON/OFF# pin (pin 3) is connected to ground. The output (VOUT, pin 5) is connected to the 3.3V output through a 10nF capacitor (C7). The bypass pin (pin 4) is connected to ground through a 10nF capacitor (C8). The output is also connected to ground through a 100nF capacitor (C9). The text "+5V to 3.3V" is written in pink.

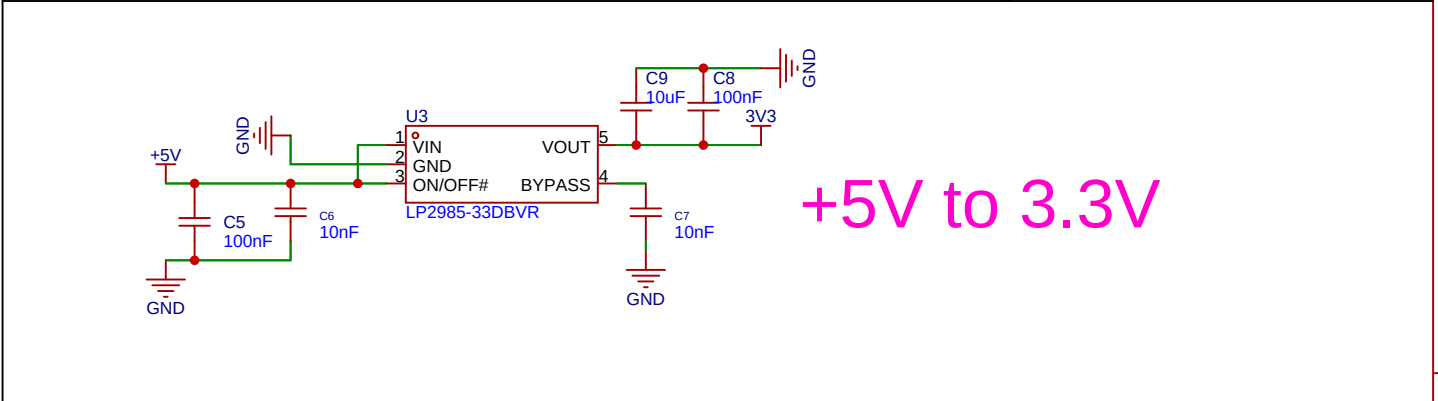

Schematic	Schematic1			Create at	2026-05-27
				Update at	2026-05-28
Board	Board1			Page	P1
Drawn		Flipper-Zero-Flux-Capacitor			
Reviewed					
		Version	Size	Page 1 Total 1	
		V1.0	A4	EasyEDA.com	