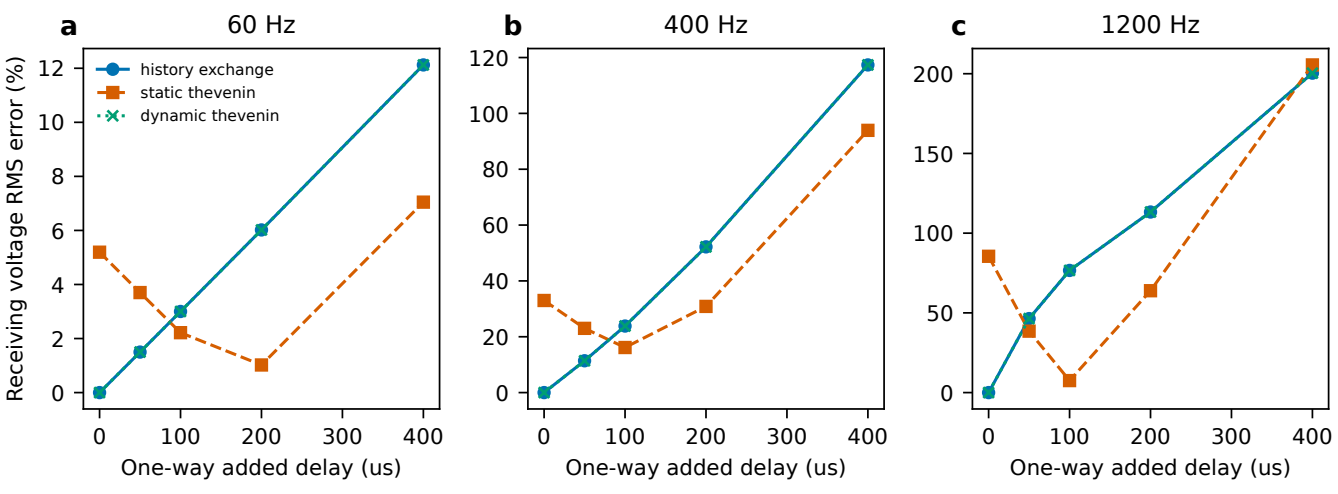
a
60 Hz
b
400 Hz
c
1200 Hz
history exchange
static thevenin
dynamic thevenin
Receiving voltage RMS error (%)
One-way added delay (us)
One-way added delay (us)
One-way added delay (us)