

DUKE


DY 5030

Template Sewing Machine



Application

Optional Equipments

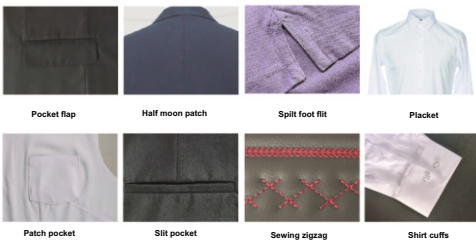

DY30 1-2-3-4

① With or without lockstitch machine	
Equipped with lockstitch machine	-Y
Without lockstitch machine	-M
② Control system	
DAHQA system	-D
RUINENG system	-RN
③ Desktop suitable for lockstitch model	
Equipped with DDL-8000A	-8000
Waiting for subsequent brands of lockstitch machine to join	
④ Carry	
Cold knife cutting device	-JG
Chalk function	-XF
Suction device	-HB
Laser cutting device	-LD

Lockstitch Sewing Machine Function

Model	DY30 Series
Equipment Floor Space	120 x 120 cm
Max. Sewing Speed	5000 sti/min
Stitch Length	0.1-5 mm
Lift of Presser Foot (By Hand)	5.5 mm
Lift of Presser Foot (Automatic)	By knee - 1st stage: 8.5 mm, 2nd stage: 13 mm, Max: 15 mm
Needle	DBx1 (#11), #9-18 (134Nm65-110)
Power Consumption	330 VA (Main Motor Output: 550 W)

Template Sewing Machine Mode

Sewing Area	300 mm x 500 mm
Max. Sewing Speed	3500 sti/min
Stitch Length	0.05-12.7 mm
Lift of Presser Foot	Max. 20 mm
Thread Trimming Method	Double-edge rotary system
RFID Technology	Unlimited number of identification
Needle	DPx5 (#7-#24); DPx17 (#11-#24)
Program Input Device	Computer USB data cable or U disk



HARI CHAND ANAND & CO.

Corporate Head Office:

A-94/1, Okhla Industrial Area Phase II, New Delhi - 110020

+91 8860086712 , 9313308705

enquiry@groupphca.com